



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SOM-5897

6th Gen Intel Xeon/Core/Celeron Processors COM Express Basic Module Type 6

NEW

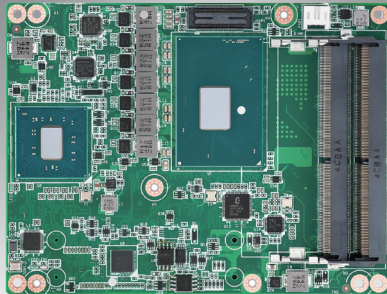

Windows Embedded

iManager susiAccess CE FCC

Features

- 6th Gen Intel Xeon/Core i7/i5/i3/Celeron + PCH QM170
- Dual DDR4 2133, 1.2V Low Power Memory, Max. 32GB
- Support XDP, TPM2.0
- Flexible I/O support: 8 PCIe x1 (Gen3) with LAN, TPM2.0
- Supports iManager susiAccess, and Embedded Software APIs

Software APIs:

- Watchdog
- PC
- SMBus
- H/W Monitor
- GPIO
- Brightness Control


Utilities:

- BIOS flash
- Monitoring
- Embedded Security ID

Specifications

Compliance	Form-Factor	COM Express Basic Module										
	Pin-out Type	COM Express R2.1 Type 6 pin out										
Platform	Processor	i7-6820EQ	i7-6822EQ	i5-6440EQ	i5-6442EQ	i3-6100E	i3-6102E	G3900E	E3-1505M V5	E3-1505L V5	E3-1515M v5	
	Base Frequency	2.8GHz	2.0GHz	2.7GHz	1.9GHz	2.7GHz	1.9GHz	2.4GHz	2.8GHz	2.0GHz	2.8GHz	
	Turbo Boost Freq.	3.5GHz	2.8GHz	3.4GHz	2.7GHz	-	-	-	3.7GHz	2.8GHz	3.7GHz	
	Core/Tread	4/8	4/8	4/4	4/4	2/4	2/4	2/2	4/8	4/8	4/8	
	LLC	8	8	6	6	3	3	2	8	8	8	
	CPU TDP	45W	25W	45W	25W	35W	25W	35W	45W	25W	45W	
	Chipset	Core with QM170; Xeon with CM236										
	BIOS	AMI UEFI 128Mbit										
Memory	Technology	DDR4										
	ECC Support	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Not supported	Support	Support	Support	
	Channel/Socket	Dual Channels / 2 sockets										
	Max. Capacity	Up to 32GB										
Graphics	Controller	Intel Gen 9							Intel® HD Graphics P530		Intel® Iris™ Pro Graphics P580	
	Base/Turbo Freq.	350/1000	350/1000	350/1000	350/1000	350/950	350/950	350/950	350/1050	350/1000	350/1000	
	Graphics Memory	Intel DMV15.0, share memory up to 1024MB										
Display	3D/HW Acceleration	HW Encode: H.265/HEVC, H.264, MPEG2, HW Decode: H.264, Direct3D 12(2015)/11.2/11.1/10/9, Direct2D, OpenGL 4.4, OpenCL 2.0/1.2										
	VGA	1 port up to 1920 x 1200 @ 60 Hz										
	LCD	LVDS Dual Channel 18/24-bit, up to 1920 x 1200 @ 60Hz										
	DDI	2 Port configurable to HDMI1.4/DVI/Displayport1.2										
	HDMI up to	4096 x 2160@24Hz, DVI up to 1920 x 1200@60Hz, DP up to 4096 x 2304 @ 60Hz										
Expansion	Multiple Display	Dual display, Triple display with each display combinations										
	PCI Express x16	1 PCIe x16 configurable to 1 x16, 2 x8, 1 x8 + 2 x4										
	PCI Express x1	8 PCIe x1, configurable to x4 or x2										
	Audio Interface	Intel HD Audio Interface										
Serial Bus	LPC	Yes										
	SMBus	Yes										
Ethernet	PC Bus	Yes										
	Controller	Intel i219										
I/O	Speed	10/100/1000 Mbps										
	SATA	4 SATAIII 6.0Gb/s										
	USB3.0	4 Ports										
	USB2.0	8 Ports										
	SPI Bus	Yes										
	GPIO	8-bit										
	Watchdog	65536 level, 0-65535 sec										
	COM Port	2 Ports (2-wire)										
	Express Card	2 Ports										
	TPM	Optional TPM2.0 (Infineon SLB9665)										
Power	Smart Fan	2 Ports; 1 port on COM module. Support 12V Fan, 1 port on carrier board										
	Type	ATX: Vin, VSB; AT: Vin										
	Supply Voltage	Vin: 8.5V (9V-5%) ~ 20V (19+5%); VSB: 5 +/-5%, RTC Battery: 2.0-3.3V										
Environment	Power Consumption	Max: (16GB DDR4 2133) i7-6820EQ +12V @ 43.3W Idle: (16GB DDR4 2133) i7-6820EQ +12V @ 5.23W *Only for reference and will depends on custom software loading, detail refer to user manual										
	Temperature	Operating Standard: 0 ~ 60° C (32 ~ 140° F), Extend: -40 ~ 85° C (-40 ~ 185° F)				Storage: -40 ~ 85° C (-40 ~ 185° F)						
Mechanical	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing				Storage: 60° C @ 95% relative humidity, non-condensing						
	Vibration Resistance	3.5 Grms										
Mechanical	Dimensions	125 x 95 mm (4.92" x 3.74")										

Block Diagram

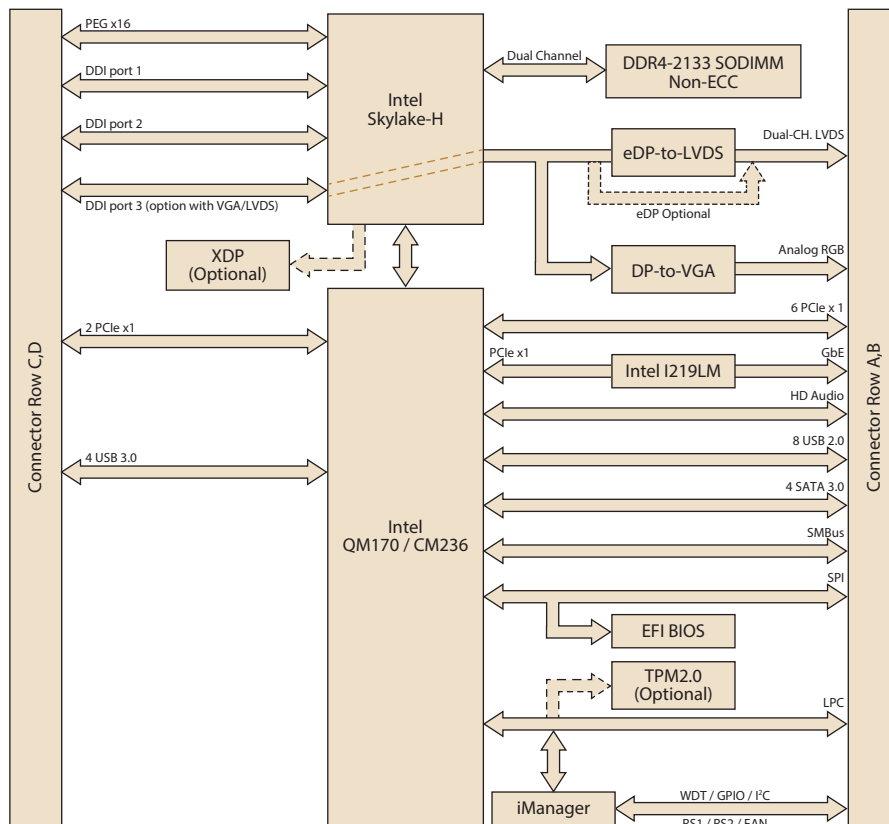

Ordering Information

Part No.	CPU	Freq.	Core	CPU TDP	LLC	DDR4 Memory	Thermal Solution	Operating Temperature
SOM-5897C7-U8A1E	i7-6820EQ	2.8 GHz	4	45W	8	non-ECC	Active	0 – 60 °C
SOM-5897C7-U0A1E	i7-6822EQ	2.0 GHz	4	25W	8	non-ECC	Active	0 – 60 °C
SOM-5897C5-U7A1E	i5-6440EQ	2.7 GHz	4	45W	6	non-ECC	Active	0 – 60 °C
SOM-5897C5-S9A1E	i5-6442EQ	1.9 GHz	4	25W	6	non-ECC	Active	0 – 60 °C
SOM-5897C3-U7A1E	i3-6100E	2.7 GHz	2	35W	3	non-ECC	Active	0 – 60 °C
SOM-5897C3-S9A1E	i3-6102E	1.9 GHz	2	25W	3	non-ECC	Active	0 – 60 °C
SOM-5897CR-U4A1E	G3900E	2.4 GHz	2	35W	2	non-ECC	Active	0 – 60 °C
SOM-5897E4C-U7A1E	E3-1505M V5	2.8 GHz	4	45W	8	ECC	Active	0 – 60 °C
SOM-5897E4C-U0A1E	E3-1505L V5	2.0 GHz	4	25W	8	ECC	Active	0 – 60 °C
SOM-5897E4C-U8A1E	E3-1515M V5	2.8 GHz	4	45W	8	ECC	Active	0 – 60 °C
SOM-5897E4X-U0A1E	Xeon E3-1505L V5	2.0 GHz	4	25W	8	ECC	Active	-40 – 85 °C
SOM-5897C7Z2-U0A1E	i7-6822EQ	2.0 GHz	4	25W	8	non-ECC	Active	-40 – 85 °C
SOM-5897C7X-U8A1E	i7-6820EQ	2.8 GHz	4	45W	8	non-ECC	Active	-40 – 85 °C
SOM-5897E4X-U7A1E	Xeon E3-1505M V5	2.8 GHz	4	45W	8	ECC	Active	-40 – 85 °C
SOM-5897E4X-U8A1E	Xeon E3-1515M V5	2.8 GHz	4	45W	8	ECC	Active	-40 – 85 °C

Development Board

Part No.	Description
SOM-DB5800-00A2E	COMe Devel. Board Type6 pint-out Rev. A2

Packing List

Part No.	Description	Quantity
-	SOM-5897 CPU module	1
1960073944N001	Heatspreader	1

Optional Accessories

Part No.	Description
1960048820N001	Semi-Cooler 125 x 95 x 33 mm with 12V FAN
1960073941T061	Low Profile DHCS (125 x 95 x 30 mm)
1960073941T051	High Perf. DHCS (125 x 95 x 43 mm)

* Test conditions follow Advantech regulations and procedures.

* DHCS: Dynamic Heat Conduction System Cooler

Embedded OS

OS	Part No.	Description
Win10 IoT LTSB	2070015177	Img Win10 IoT Ent_LTSB 64 bit