



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SOM-6896

5th Gen Intel® Core™ / Celeron® Processors COM Express Compact Module Type 6

NEW



Windows Embedded

iManager susiAccess CE FCC

Features

- 5th Gen Intel® Core™ / Celeron® Processors U-Series (SoC)
- Dual Channel DDR3L 1600 SODIMM sockets up to 16 GB
- 3 independent displays: VGA, LVDS, HDMI/DisplayPort/DVI
- Resolutions up to 4096 x 2304 (4K2K) @ 60 Hz
- iManager, SUSIAccess and Embedded Software APIs

Software APIs:

- Watchdog
- I²C
- SMBus
- H/W Monitor
- GPIO
- Brightness Control


Utilities:

- BIOS flash
- Monitoring
- Embedded Security ID

Specifications

Form Factor	Form Factor	COM Express Compact Module			
	Pin-out Type	COM Express R2.1 Type 6			
Processor System	CPU + PCH	5 th Gen Intel® Core™ / Celeron® Processors			
		Intel® i7-5650U	Intel® i5-5350U	Intel® i3-5010U	Celeron® 3765U
	Base Frequency	2.2GHz	1.8GHz	2.1GHz	1.9GHz
	Max Turbo Frequency	3.1GHz	2.9GHz	N/A	N/A
	Core / Thread	2/4	2/4	2/4	2/2
	LLC	4M	3M	3M	2M
	CPU TDP	15W	15W	15W	15W
	BIOS	AMI UEFI BIOS 128 Mb			
Memory	Technology	DDR3L 1600			
	ECC Support	N/A			
	Channel / Socket	Dual Channels / 2 x 204P SODIMMs			
	Max. Capacity	16GB			
Graphics	Controller	Intel® HD graphics 6000	Intel® HD graphics 6000	Intel® HD graphics 5500	Intel® HD graphics
	Max. Frequency	1GHz	1GHz	0.9GHz	850MHz
	Graphic Memory	Up to 1GB			
	3D/HW Acceleration	DX 11.1, OptionGL 4.0/4.2, OCL1.2, HW Decode/Encode for H.264/AVC, VC-1, SVC, MPEG2, Decode for VP8			
Display	VGA	1920 x 1200			
	LVDS	Single and dual channel 18/24-bit resolutions up to 1920 x 1200			
	DDI (HDMI/DVI/DisplayPort)	DDI 1: support HDMI (1.4a specification compliant with 3D) resolutions up to 4096 x 2304, DisplayPort resolutions up to 3840 x 2160 DVI resolutions up to 1920 x 1200 (DDI 2: Optional)			
	Dual Display	Combinations of VGA / LVDS / HDMI / DVI / DisplayPort			
	Triple Display	Combinations of VGA / LVDS / HDMI / DVI / DisplayPort			
Expansion	PCI Express x16 (PEG)	Optional 1 PCIe4 while support 3 PCIe1			
	PCI Express x1	4 PCIe1			
	Audio Interface	HD Audio			
	LPC	Yes (24MHz)			
Serial Bus	SMBus	Yes			
	I ² C Bus	Yes			
Ethernet	Controller	Intel® i218LM			
	Speed	10/100/1000 Mbps			
I/O	SATA	4 Ports, Support Gen3 (6Gb/s) and Gen2 (3Gb/s), RAID 0, 1, 5, 10			
	USB3.0	2 Ports			
	USB2.0	8 Ports			
	SPI Bus	for BIOS only			
	GPIO	8-bit GPIO			
	Watchdog	65536 level, 0 ~ 65535 sec			
	COM Port	2 Ports (2-Wire)			
	Express Card	Yes			
	TPM	TPM 1.2 (Optional)			
	Smart Fan	2 Ports; 1 Port on COM Module. Support 12V Fan, 1 Port on Carrier Board			
	Power	Type	ATX, AT		
Supply Voltage		Vin: 4.75(5-5%) ~ 20V(19+5%), VSB: 5V±5%, RTC Battery: 2.0-3.3V			
Power Consumption (Max.)		+12 V @ 1.5A (i3-5010U)			
Power Consumption (Idle)		+12 V @ 0.388A (i3-5010U)			
Environment	Temperature	Operating: 0 ~ 60° C (32 ~ 140° F), Storage: -40 ~ 85° C (-40 ~ 185° F)			
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95% relative humidity, non-condensing			
	Vibration Resistance	3.5 Grms			
Mechanical	Dimensions	95 x 95 mm (3.74" x 3.74")			

Block Diagram

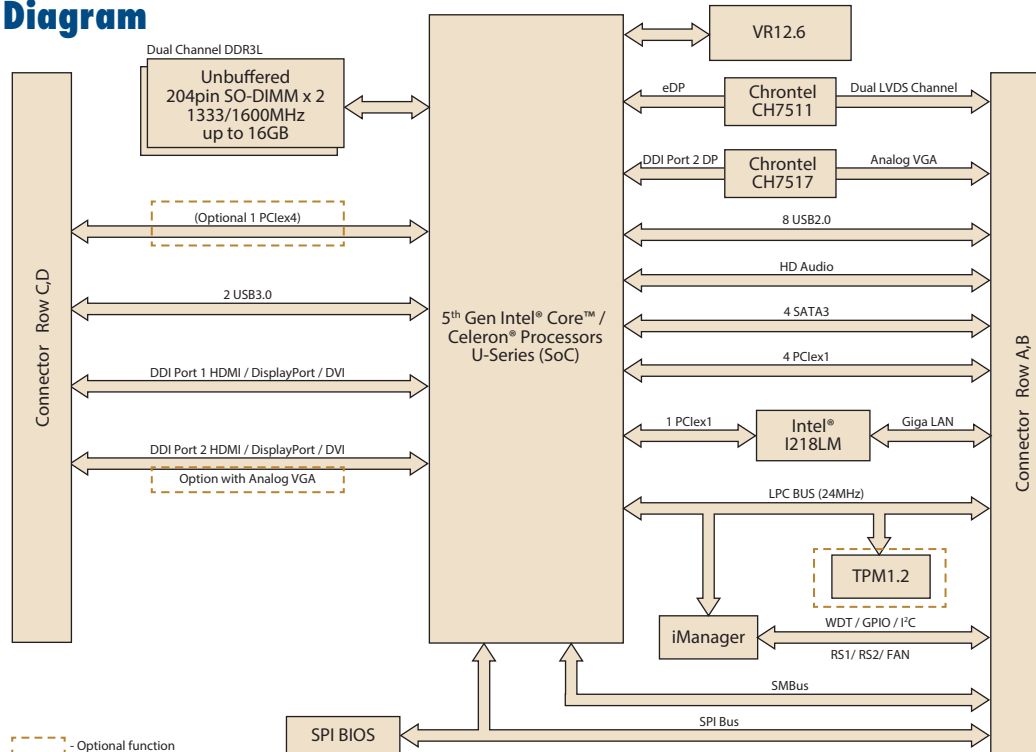

Expansion Compatibility Table

	PCIe x1	PEG (x4)	LAN	SATA
Default	4	0	1	4
Optional	3	1	1	4

Ordering Information

Part No.	CPU + PCH	Freq.	Core	LLC	TDP	DDR3L Memory	Thermal Solution	Operating Temperature
SOM-6896C7-U2A1E	Intel i7-5650U	2.2GHz	2	4M	15W	Non-ECC	Active	0 ~ 60° C
SOM-6896C5-S8A1E	Intel i5-5350U	1.8GHz	2	3M	15W	Non-ECC	Active	0 ~ 60° C
SOM-6896C3-U1A1E	Intel i3-5010U	2.1GHz	2	3M	15W	Non-ECC	Active	0 ~ 60° C
SOM-6896CR-S9A1E	Celeron® 3765U	1.9GHz	2	2M	15W	Non-ECC	Active	0 ~ 60° C
SOM-6896C7Z-U2A1E	Intel i7-5650U	2.2GHz	2	4M	15W	Non-ECC	Active	-20 ~ 80° C
SOM-6896C5Z-S8A1E	Intel i5-5350U	1.8GHz	2	3M	15W	Non-ECC	Active	-20 ~ 80° C
SOM-6896C3Z-U1A1E	Intel i3-5010U	2.1GHz	2	3M	15W	Non-ECC	Active	-20 ~ 80° C
SOM-6896CRZ-S9A1E	Celeron® 3765U	1.9GHz	2	2M	15W	Non-ECC	Active	-20 ~ 80° C
SOM-6896C7Z2-U2A1E	Intel i7-5650U	2.2GHz	2	4M	15W	Non-ECC	Active	-40 ~ 85° C
SOM-6896C5Z2-S8A1E	Intel i5-5350U	1.8GHz	2	3M	15W	Non-ECC	Active	-40 ~ 85° C
SOM-6896C3Z2-U1A1E	Intel i3-5010U	2.1GHz	2	3M	15W	Non-ECC	Active	-40 ~ 85° C
SOM-6896CRZ2-S9A1E	Celeron® 3765U	1.9GHz	2	2M	15W	Non-ECC	Active	-40 ~ 85° C

Note: Passive = fanless; Active = with fan

Packing List

Part No.	Description	Quantity
-	SOM-6896 CPU Module	1
1960069307N001	Heatspreader	1

Development Board

Part No.	Description
SOM-DB5800-00A2E	COM Express Development Board A2 Type 6 Pin-out

Optional Accessories

Part No.	Description
1960048819N001	Semi-Cooler 95 x 95 x 33.5 mm with 12V fan
96LEDK-I057VG50NA1	5.7" LED PANEL 500N 640X480(G)
96LEDK-A084SV45NB2	8.4" LED PANEL 450N 800X600(G) G084SN05 V9
96LEDK-C150XG40NG1	15" LED PANEL 400N 1024X768(G) G150XGE-L04
96LEDK-A170SX35NF1	17" LED 350N 1280X1024(G) G170EG01 V1

Embedded OS

OS	Part No.	Description
WES7 (64bit)	2070013528	Img WES7P SOM-6896 x64 v5.6.6
WE8 (64bit)	2070013606	Img WE8I SOM-6896 x64 V1.0