



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SOM-6898

## 7<sup>th</sup> Gen Intel Core/Celeron Processors COM Express Compact Module Type 6

**NEW**



### Features

- 7<sup>th</sup> Gen Intel Core i7/i5/i3/Celeron w/ integrated PCH-LP
- Support Dual Channel DDR4 2133 SODIMM up to 32GB
- Integrated GFX supports HEVC, VP8, VP9 HW Transcode
- Flexible PCI Express up to 8 lanes
- Supports iManager, WISE-PaaS/RMM, and Embedded Software APIs

**Software APIs:**

- Watchdog
- IPC
- SMBus
- H/W Monitor
- GPIO
- Brightness Control

**Utilities:**

- BIOS flash
- Monitoring
- Embedded Security ID




Windows Embedded

iManager WISE-PaaS/RMM CE FC

### Specifications

Compliance	Form-Factor	COM Express Compact Module				
	Pin-out Type	COM Express R2.1 Type 6 pin out				
Platform	SoC	i7-7600U	i5-7300U	i3-7100U	Celeron3965U	
	Base Frequency	2.8 GHz	2.6 GHz	2.4 GHz	2.2 GHz	
	Turbo Boost Freq.	3.9 GHz	3.5 GHz	N/A	N/A	
	Core/Tread	2/4	2/4	2/4	2/2	
	LLC	4M	3M	3M	2M	
	CPU TDP	15W	15W	15W	15W	
	Chipset	integrated in CPU				
	BIOS	AMI EFI BIOS				
Memory	Technology	DDR4 2133				
	ECC Support	Not supported				
	Channel/Socket	Dual channels / 2 sockets				
	Max. Capacity	32GB				
Graphics	Controller	Intel® HD Graphics 620	Intel® HD Graphics 620	Intel® HD Graphics 620	Intel® HD Graphics 610	
	Base/Turbo Freq.	300MHz/1.15GHz	300MHz/1.10GHz	300MHz/1GHz	300MHz/900MHz	
	Graphics Memory	Intel DVMT				
	3D/HW Acceleration	Direct3D 2015/11.2/11.1/10/9, Direct2D, OpenGL 5.0, OpenCL 2.1/2.0/1.2 HW Decode: H.265/HEVC, H.264/AVC, VP9, VP8, MPEG2, WMV9/VC1, JPEG/MJPEG HW Encode: H.265/HEVC, H.264/AVC, VP9, VP8, MPEG2, JPEG				
	VGA	Support up to 1920 x 1200 @ 60 Hz				
Display	LCD	LVDS support 2 channels 18/24-bit, up to 1920 x 1200 @ 60Hz Optional eDP up to 3840 x 2160 @ 60Hz 24bpp or 4096 x 2304 @ 60Hz 24bpp				
	DDI	1 Ports, optional 2 while remove VGA, configurable to HDMI1.4/DVI/Displayport1.2 HDMI up to 4096 x 2160 @ 24Hz 24bpp DVI up to 1920 x 1080 @ 60Hz DP up to 3840 x 2160 @ 60Hz 24bpp or 4096 x 2304 @ 60Hz 24bpp				
	Multiple Display	Support 3 independent display				
	PCI Express x16	Not available				
	PCI Express x1	PCI Express Gen3 (8.0 GT/s) 4 PCIe x1 + 1 PCIe x4, 5 PCIe x1 (Optional)				
Expansion	Audio Interface	Intel HD Audio				
	LPC	Yes (24MHz)				
	SMBus	Yes				
Serial Bus	IPC Bus	Yes				
	Controller	Intel i219LM				
Ethernet	Speed	10/100/1000 Mbps				
	SATA	Supports 2 SATA 3.0 (6 Gbit/s), optional support 3 SATA 3.0 (6 Gbit/s) Support RAID 0/1/5/10, AHCI 1.3/1.3.1				
I/O	USB3.0	4 Ports				
	USB2.0	8 Ports				
	SPI Bus	For BIOS only				
	GPIO	8-bit GPIO				
	eMMC	Optional				
	Watchdog	65536 level, 0 ~ 65535 sec				
	COM Port	2 Ports (2-wire, support console redirection)				
	Express Card	2 ports				
	TPM	TPM2.0 (Infineon SLB9665)				
	Smart Fan	2 Ports: 1 Port on COM Module, Support 12V Fan, 1 Port on Carrier Board				
	Power	Type	ATX: Vin, VSB; AT: Vin			
		Supply Voltage	Vin: 8.5V (9V-5%) ~ 20V (19+5%); VSB: 5V ±5%			
Power Consumption		Burn in: 17.9W Idle: 4.4W *Only for reference and will depends on custom software loading, detail refer to user manual				
Environment	Temperature	Operating : 0 ~ 60° C (32 ~ 140° F) (Extend model -40 ~ 85° C) Storage : -40 ~ 85° C (-40 ~ 185° F)				
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95%relative humidity, non-condensing				
	Vibration Resistance	3.5 Grms				
Mechanical	Dimensions	95 x 95 mm (3.74" x 3.74")				

## Block Diagram

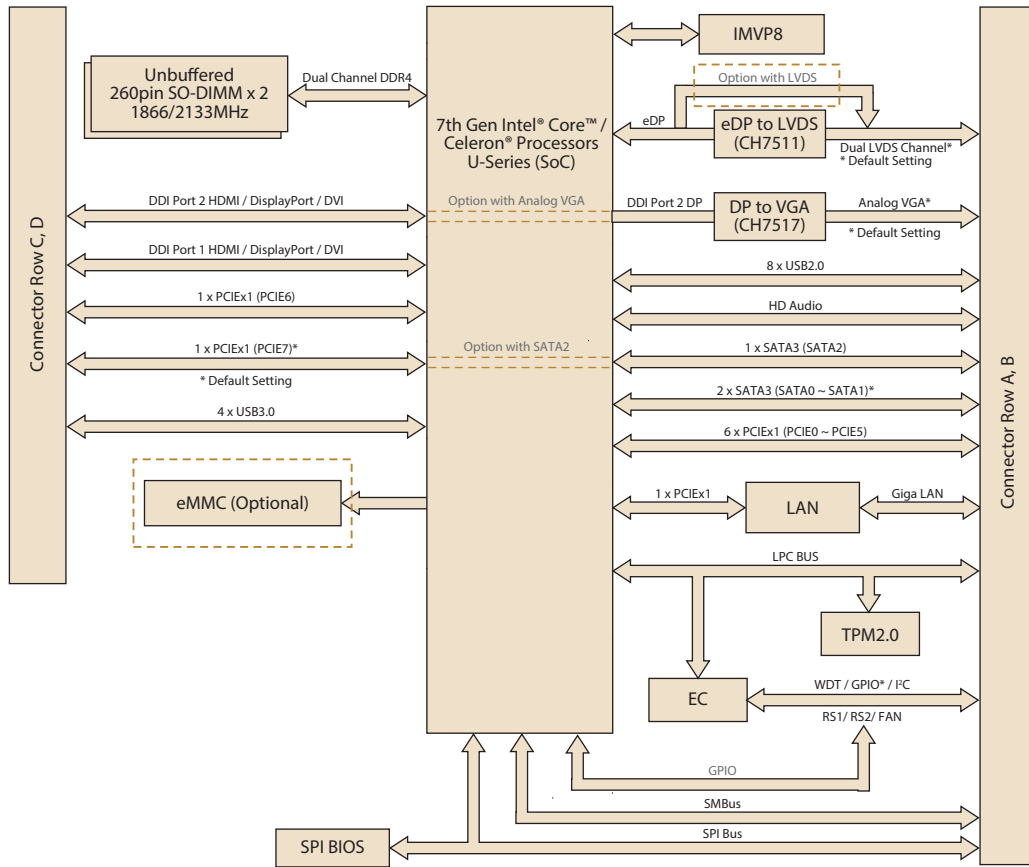

## Ordering Information

Part No.	SoC	Base/Turbo Boost Freq.	Core	LLC	CPU TDP	DDR4 Memory	Thermal Solution	Operating Temperature
SOM-6898C7-U8A1E	i7-7600U	2.8GHz / 3.9GHz	2	4MB	15W	Non-ECC	Active	0 ~ 60° C
SOM-6898C5-U6A1E	i5-7300U	2.6GHz / 3.5GHz	2	3MB	15W	Non-ECC	Active	0 ~ 60° C
SOM-6898C3-U4A1E	i3-7100U	2.4GHz / N/A	2	3MB	15W	Non-ECC	Active	0 ~ 60° C
SOM-6898CR-U4A1E	Celeron 3965U	2.2GHz / N/A	2	2MB	15W	Non-ECC	Active	0 ~ 60° C
SOM-6898C7Z2-U8A1E	i7-7600U	2.8GHz / 3.9GHz	2	4MB	15W	Non-ECC	Active	-40 ~ 85° C
SOM-6898C5Z2-U6A1E	i5-7300U	2.6GHz / 3.5GHz	2	3MB	15W	Non-ECC	Active	-40 ~ 85° C
SOM-6898C3Z2-U4A1E	i3-7100U	2.4GHz / N/A	2	3MB	15W	Non-ECC	Active	-40 ~ 85° C
SOM-6898CRZ2-U4A1E	Celeron 3965U	2.2GHz / N/A	2	2MB	15W	Non-ECC	Active	-40 ~ 85° C

Note: Any other sku or combination is project based support. Please contact sales for details.

## Development Board

Part No.	Description
SOM-DB5800-00A2E	COMe Devel. Board Type6 pint-out Rev. A2

## Packing List

Part No.	Description	Quantity
-	SOM-6898 CPU module	1
1960080159N000	Heatspreader	1

## Optional Accessories

Part No.	Description
1960048819N001	Semi-Cooler 95 x 95 x 33.5 mm with 12V Fan
96LEDK-I057VG50NA1	5.7" LED PANEL 500N 640X480(G)
96LEDK-A084SV45NB2	8.4" LED PANEL 450N 800X600(G) G084SN05 V9
96LEDK-C150XG40NG1	15" LED PANEL 400N 1024X768(G) G150XGE-L04
96LEDK-A170SX35NF1	17" LED 350N 1280X1024(G) G170EG01 V1

## Embedded OS

OS	Part Number	Description
Win10	2070015199	img W10 16HL SOM-6898 64b 1701 ENU
Win10	2070015200	img W10 16VL SOM-6898 64b 1701 ENU
Win10	2070015201	img W10 16EL SOM-6898 64b 1701 ENU