



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SERIES

**SP1008R
SP1008**




Shielded Surface Mount Power Inductors

DASH NUMBER*
INDUCTANCE (μH)
±10% @ 100 KHZ
DC RESISTANCE
MAXIMUM (OHMS)
CURRENT RATING
MAXIMUM (mA)

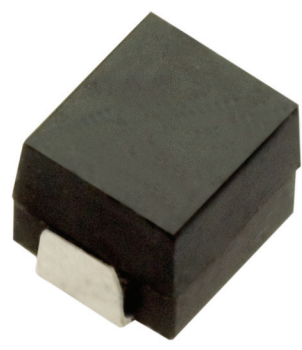

Actual Size

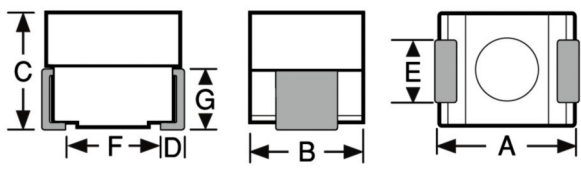

Physical Parameters

	Inches	Millimeters
A	0.095 to 0.115	2.41 to 2.92
B	0.085 to 0.105	2.16 to 2.66
C	0.0755 to 0.095	1.91 to 2.41
D	0.010 to 0.030	0.26 to 0.76
E	0.040 to 0.060	1.02 to 1.52
F	0.060 (Ref. only)	1.52 (Ref. only)
G	0.045 (Ref. only)	1.14 (Ref. only)

Dimensions "A" and "C" are over terminals.

Operating Temperature Range -55°C to +125°C

Current Rating at 90°C Ambient 35°C Rise

Inductance Measured at 1V with no DC current

Incremental Current The current at which the inductance will be decreased by a maximum of 5% from its initial 0 ADC value.

Marking SMD; dash number with tolerance letter followed by a P; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: SP1008-104K

- SMD
- 104KP
- 0925A

Packaging Tape & reel (8mm): 7" reel, 2000 pieces max.; 13" reel, 7000 pieces max.

Coupling 5% Typical (Ref. M83446, 1mm spacing)

Made In the U.S.A.

SERIES SP1008 FERRITE CORE			
-271K	0.270	0.099	1070
-331K	0.330	0.108	1030
-391K	0.390	0.118	980
-471K	0.470	0.128	941
-561K	0.560	0.147	878
-681K	0.680	0.157	850
-821K	0.820	0.167	824
-102K	1.00	0.228	705
-122K	1.20	0.252	671
-152K	1.50	0.288	627
-182K	1.80	0.392	538
-222K	2.20	0.437	509
-272K	2.70	0.482	485
-332K	3.30	0.527	465
-392K	3.90	0.739	392
-472K	4.70	0.817	372
-562K	5.60	0.895	356
-682K	6.80	1.43	282
-822K	8.20	1.54	271
-103K	10.0	1.70	258
-123K	12.0	1.87	246
-153K	15.0	2.10	232
-183K	18.0	2.88	198
-223K	22.0	4.02	168
-273K	27.0	4.50	159
-333K	33.0	4.90	152
-393K	39.0	5.30	146
-473K	47.0	5.90	139
-563K	56.0	6.40	133
-683K	68.0	9.00	112
-823K	82.0	9.90	107
-104K	100	10.9	102

Optional Tolerances: J = 5% H = 3% G = 2%
*Complete part # must include series # PLUS the dash #
For surface finish information, refer to www.delevanfinishes.com

