



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


2 X 100A Schottky Barrier Rectifier

SPB10035 – SPB10045

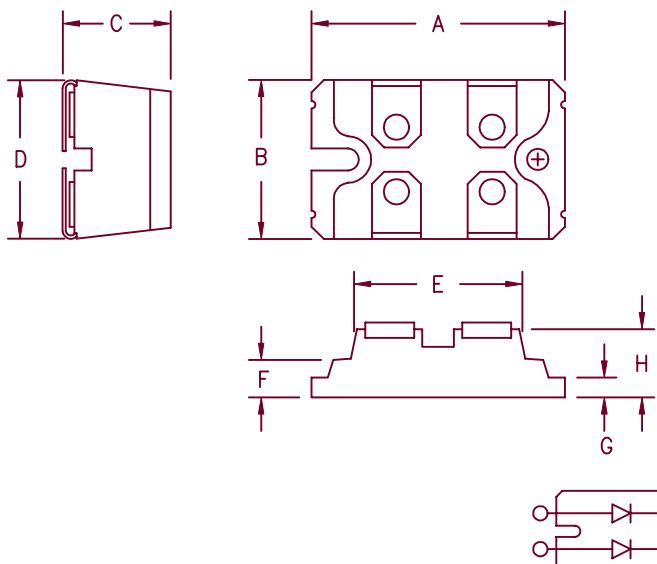

Dim.	Millimeter				Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.494	1.504	37.95	38.20	
B	0.976	0.986	24.79	25.04	
C	0.472	0.480	12.00	12.24	
D	0.990	1.000	25.15	25.40	
E	1.049	1.059	26.67	26.90	
F	0.164	0.174	4.16	4.42	
G	0.080	0.084	2.03	2.13	
H	0.372	0.378	9.45	9.60	

SOT-227



Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
SPB10035			35V	35V
SPB10040			40V	40V
SPB10045	DSS2x81-0045B STPS120H45TV STPS160H45TV		45V	45V

- 2500V isolation – Terminals to Base
- Low Forward Voltage Drop
- 2 Schottky Rectifiers in one pkg.
- 35–45V @ 100A/leg
- Low Switching losses

Electrical Characteristics

Average forward current per leg	$I_{F(AV)}$ 100 Amps	$T_C = 103^\circ\text{C}$
Average forward current per package	$I_{F(AV)}$ 200 Amps	$T_C = 103^\circ\text{C}$
Maximum surge current per leg	I_{FSM} 1600 Amps	8.3ms, half sine, $T_J = 175^\circ\text{C}$
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps	$f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec square wave}$
Max peak forward voltage per leg	V_{FM} 0.57 Volts	$I_{FM} = 100\text{A}; T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	I_{RM} 5 mA	$V_{RRM}, T_J = 25^\circ\text{C}^*$
Max peak reverse current per leg	V_{ISOL} 2500 VDC	any terminal to base
Typical junction capacitance per leg	C_J 5500 pF	$V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 150°C
Max thermal resistance per leg	$R_{\theta JC}$	0.50°C/W
Max thermal resistance per pkg	$R_{\theta JC}$	0.25°C/W
Mounting Torque		9–13 inch pounds
Weight		1.1 ounces (30 grams) typical

SPB10035

— SPB10045

Figure 1
Typical Forward Characteristics – Per Leg

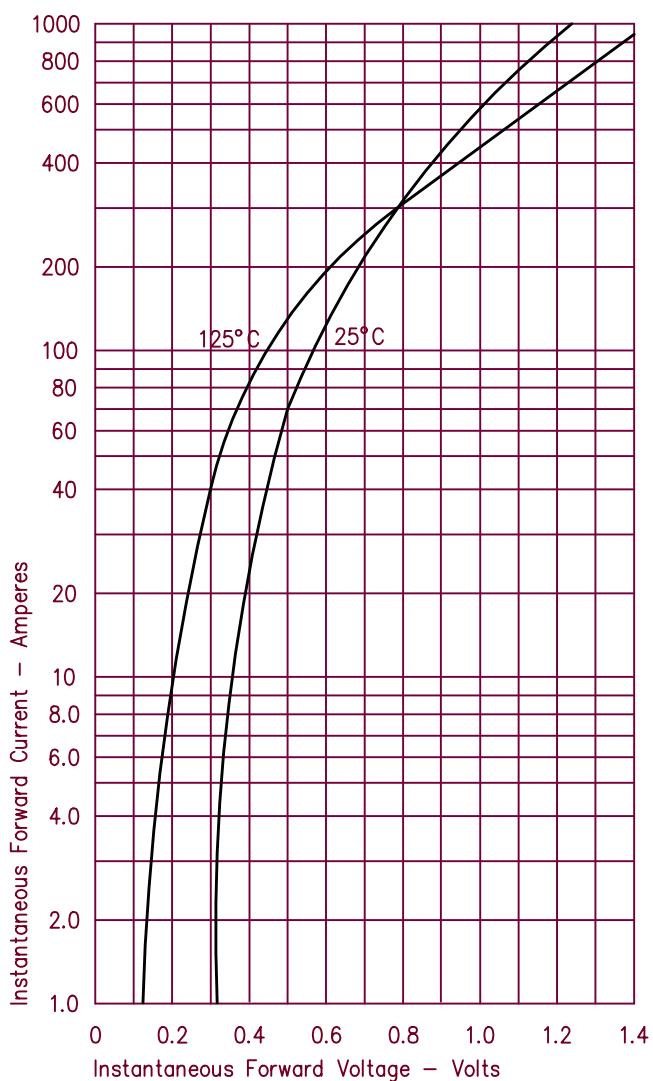


Figure 2
Typical Reverse Characteristics – Per Leg

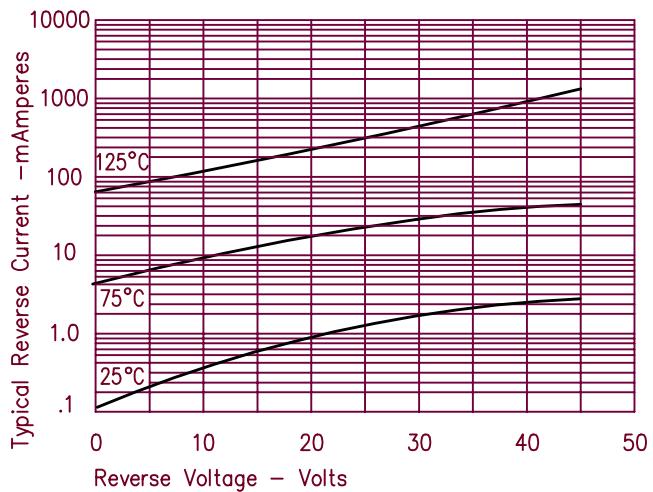


Figure 3
Typical Junction Capacitance – Per Leg

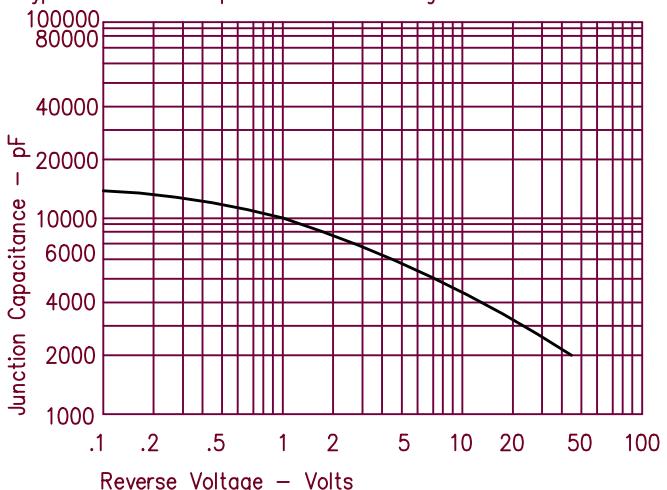


Figure 4
Forward Current Derating – Per Leg

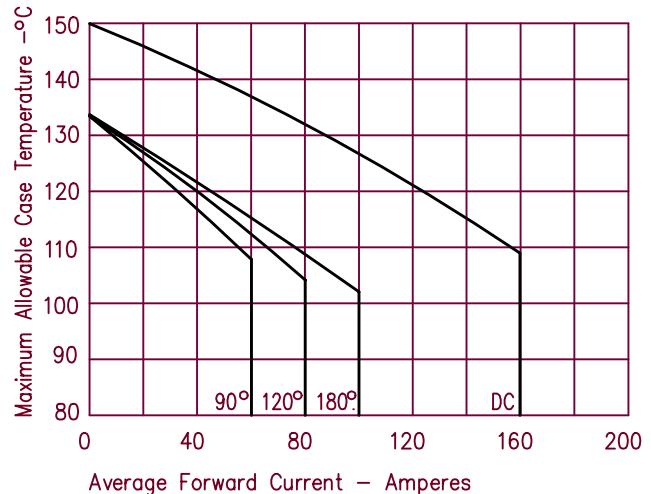


Figure 5
Maximum Forward Power Dissipation – Per Leg

