



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Switching Power Supply Type SPD 120W New DIN rail mounting



- Installation on DIN Rail 7.5 or 15mm
- Short circuit protection
- PFC standard
- High efficiency
- Power ready output
- LED indicator for DC power ON
- LED indicator for DC low
- Parallel versions standard
- Compact dimensions
- UL, cUL listed and TUV/CE approved
- Class I Div 2 Groups A, B, C, D approved

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the installation is on a DIN rail and compact dimensions and performance are a must. Then version features PFC and parallel function as standard.

Ordering Key

SP D 24 120 1 B N

Model _____
 Mounting (D = Din rail) _____
 Output voltage _____
 Output power _____
 Input type _____
 Optional features _____
 New Type _____

Input type: 1= single phase

Approvals



Optional Features

Description	Code
Standard screw terminal	Nil
Plug-in connectors	B

Output Performances

Model	Rated output Voltage (VDC)	Output Power (W)	Output Current (A)	Voltage Trim Range		DC ON LED (VDC) Threshold at start-up		DC LO LED (VDC) Threshold after startup		Typical Efficiency
				Min. VDC	Max. VDC	Min.	Max.	Min.	Max.	
SPD12120	12	120	10	11.4	14.5	10	11.2	10	11.2	84%
SPD24120	24	120	5	22.5	28.5	17.6	19.4	17.6	19.4	86%
SPD48120	48	120	2.5	45.0	55.0	37.0	43.0	37.0	43.0	87%

Output Data

Output voltage accuracy	- 0 +1% max (factory adjusted)	Ripple and noise	50mVpp
Line regulation	± 0.5%	Vi nom, Io nom BW = 20Mhz	25ms
Load regulation	± 1%	Hold up Time Vi = 115VAC	30ms
Non parallel mode	± 5%	Hold up time Vi = 230VAC	0%
Parallel mode	± 5%	Minimum load	3 units max.
Temp. coefficient	± 0.03% / °C	Parallel Operation	
Transient recovery time	2ms		

Input Data

Rated input voltage	115/230VAC autoselect	Frequency range	47- 63 Hz
Voltage range AC in, 115 AC in, 230 DC in	90 - 132VAC 180 - 264VAC 210 - 370VDC	Inrush current Vi= 115VAC Vi= 230VAC	24A 48A
Rated input current	2.2 / 0.83A	P.F.C. Passive 230VAC lo nom	0.7
Input current 2.8 / 1.4A max	Vi 90 / 180 VAC	Leakage current Input-Output Input-Fg	0.25mA Max. 3.5mA Max.

Controls and Protections

Input Fuse	T3.15/250VAC internal ¹⁾	Rated Overload Protection Power ready (only SPD 24)	110 - 145%
Overvoltage Protection Vi nom 0.8 Ionom	30 - 33VDC	Threshold at start up (contact closed)	17.6 - 19.4VDC
Output Short Circuit	Current limited	Contact rating at 60VDC Insulation	0.3A 500VDC

¹⁾ Fuse not replaceable by user

General Data (@ nominal line, full load, 25°C)


Ambient temperature	-35°C to 71°C	Case material	Metal (powder painted aluminium)
Derating (>60°C to +71°C)	2.5% / °C	Dimensions L x W x D Screw terminal type Detachable connector type	124.5 x 64 x 126 143.5 x 64 x 126
Ambient humidity	20 to 95%RH	Weight	920g
Storage temperature	-40°C to +85°C		
Protection degree	IP20		
Cooling	Free air convection		
Switching frequency	55kHz		
MTBF (MIL-HDBK-217F)	450.000h		

Approvals and EMC

Insulation voltage I / O	3.000VAC min	CE	EN50081-1 EN55022 class B EN61000-3-2 EN61000-3-3 EN61000-6-2 EN61000-6-3 EN55024
Insulation resistance	100MΩ min		
UL / cUL	UL508 listed, UL60950-1 Recognized		
TUV	EN60950-1		
ISA	12.12.01 Class I Div 2 Groups A, B, C, D		



Block Diagrams

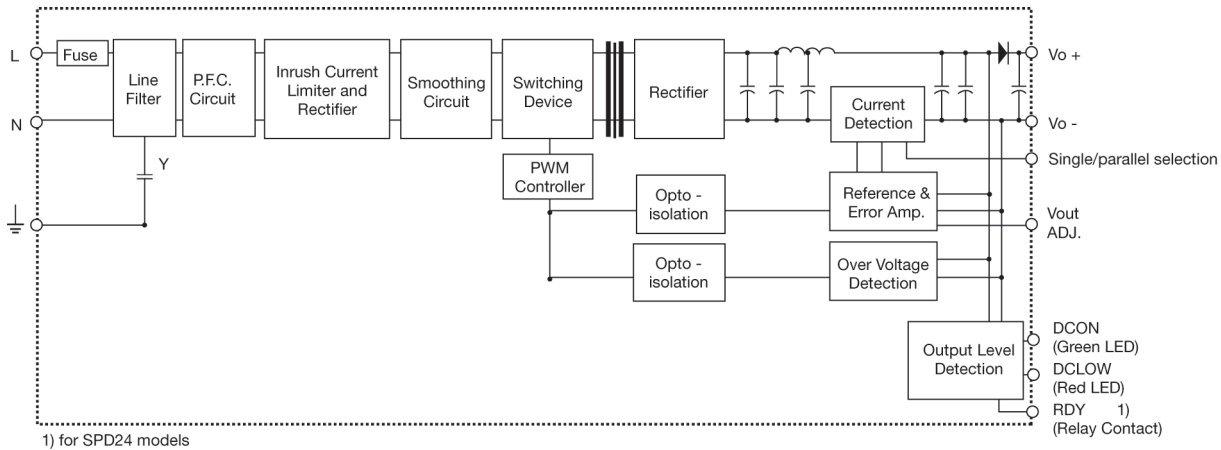


Pin Assignment and Front Controls

Pin No.	Designation	Description
1	RDY	DC OK, relay normally open contact
2	RDY	DC OK, relay normally open contact
3	+	Positive output terminal
4	+	Positive output terminal
5	-	Negative output terminal
6	-	Ground terminal to minimise High frequency emissions
7	GND	Negative output terminal
8	L	Phase input (no polarity with DC input)
9	N	Neutral input (no polarity with DC input)
	DC ON	DC output ready LED
	DC LO	DC low indicator LED
	Vout ADJ.	Trimmer for fine output voltage adjustment
	S/P	Single/parallel selection switch


Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended	Plug-in connectors	10-24AWG flexible or solid cable 7mm stripping recommend
Screw terminals	10-24AWG flexible or solid cable 8mm stripping recommend	Max. torque for plug-in terminals	Input terminals Output terminals
Max. torque for screws terminals	Input terminals Output terminals		0.784Nm (7.0lb-in) 0.784Nm (7.0lb-in)


Typ. Current Limited Curve

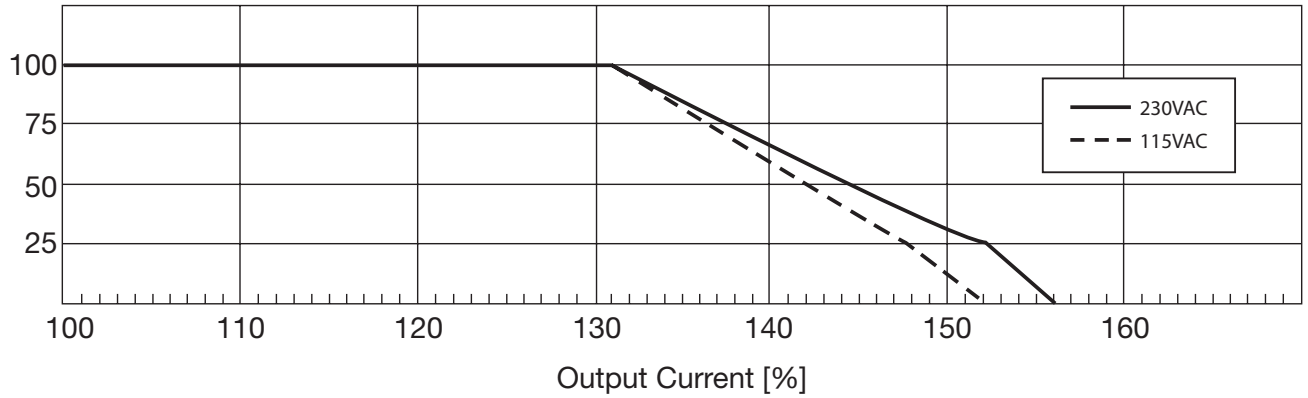

Derating Diagram

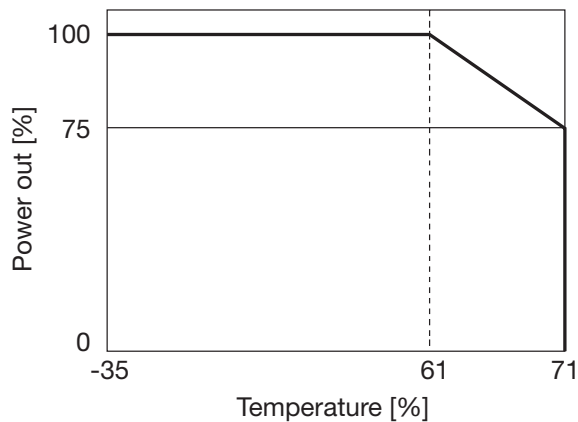

Typ. Efficiency Curve

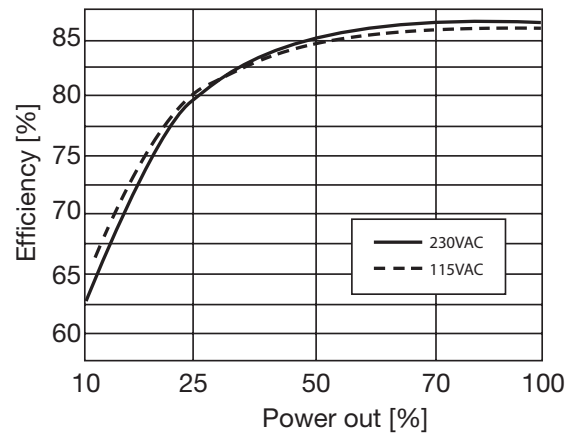

Mechanical Drawings mm (inches)

