



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Switching Power Supply Type SPD 100W DIN rail mounting



- Installation on DIN Rail 7.5 or 15mm
- Short circuit protection
- PFC standard
- Power ready output on 24VDC
- LED indicator for DC power ON
- LED indicator for DC low
- Standard parallel function
- Very compact dimensions
- UL, cUL listed and TUV/CE approved
- Class I Div 2 Groups A, B, C, D approved

Product Description

This SPD is the most compact 100W power supply on the market. Relay output for "power ready" parallel function and PFC are included. Performances are unique with high efficiencies and the possibility of being used up to 70°C with a little derating.

Ordering Key

SP D 24 100 1

Model _____
 Mounting (D = Din rail) _____
 Output voltage _____
 Output power _____
 Input Type _____

Input type: 1= single phase

Approvals



Output Performances

| MODEL NO. | INPUT VOLTAGE | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) |
|-----------------------------|---------------|----------------|----------------|----------------|-------------|-------------|
| Single Output Models | | | | | | |
| SPD12100 | 90~264 VAC | 100.8 WATTS | +12 VDC | 8,4 A | 82% | 84% |
| SPD24100 | 90~264 VAC | 100.8 WATTS | +24 VDC | 4,2 A | 84% | 86% |
| SPD48100 | 90~264 VAC | 100.8 WATTS | +48 VDC | 2,1 A | 86% | 88% |

Output Data

| | |
|---|-----------|
| Line regulation | ± 1% |
| Load regulation | |
| Non parallel model | ±1% |
| Parallel model | ±5% |
| Minimum load | 0A |
| Turn on time (full resistive load) | |
| Vi nom, Io nom 12V/24V models with 7000 µF CAP | 1000ms |
| Vi nom, Io nom 48V models with 3500 µF CAP | 2000ms |
| Transient recovery time | 2ms |
| Ripple and noise | 50mVpp |
| Output voltage accuracy | ±1% |
| Temperature coefficient | ±0.03%/°C |
| Hold up time | |
| Vi= 115VAC | 15ms |
| Vi=230VAC | 30ms |

| | |
|--|-----------------------------|
| Voltage fall time (Io nom Vi nom) | 150ms max |
| Rated continuous loading | |
| 12V Model | 8.4A @ 12VDC/6.9A @ 14.5VDC |
| 24V Model | 4.2A @ 24VDC/3.5A @ 28.5VDC |
| 48V Model | 2.1A @ 48VDC/1.8A @ 56VDC |
| Reverse voltage | |
| 12V Model | VDC 18 |
| 24V Model | VDC 35 |
| 48V Model | VDC 63 |
| Capacitor load | 7000µF |
| Voltage rise time | |
| Vi nom Io nom | 150ms |
| Vi nom, Io nom 12V/24V models with 7000µF CAP | 500ms |
| 48V model with 3500µF CAP | 500ms |

Input Data

| | | | | | |
|----------------------------|--------------|------|--------------------------|------------------|-------|
| Rated input voltage | 100 - 240VAC | | Power dissipation | | |
| Voltage range | | | (Vi : 230VAC, Io nom) | 12V Model | 18.5W |
| AC | 90 - 264VAC | | 24V Model | 15W | |
| DC | 120 - 375VDC | | 48V Model | 14W | |
| Rated input current | | | Frequency range | 47-63Hz | |
| (Vi:90VAC, Io nom) | Typ. | 2.4A | Leakage current | | |
| Inrush current | | | Input-Output | 0.25mA | |
| Vi= 115VAC | 30A | | Input-FG | 3.5mA | |
| Vi= 230VAC | 60A | | | | |

Controls and Protections

| | | | | | |
|---|--------------------------------------|--|--|-------------|-------------|
| Overload | | | Over voltage protection | VDC | |
| 12V Model | 14.5V to 17.4V | | 12V Model | Min. | Max. |
| 24V Model | 30.0V to 33.0V | | 24V Model | 14.5 | 16.5 |
| 48V Model | 60.0V to 66.0V | | 48V Model | 30 | 33 |
| Input fuse | T3.15A/250VAC internal ¹⁾ | | Internal surge voltage protection | Varistor | |
| Output short circuit | Fold forward | | (IEC 61000-4-5) | | |
| Power ready output threshold at start up | ≥17.6-19.4VDC | | | | |
| Electrical isolation | 500VDC | | | | |
| Contact rating at60VDC | 0.3A | | | | |

1) Fuse not replaceable by user


General Data (@ nominal line, full load, 25°C)

| | | | | |
|-------------------------------------|---------------------|--|--------------------------------|--|
| Ambient temperature | -35°C to +71°C | Isolation resistance | | |
| Derating (>61°C to +71°C) | 2.5%/C | input/output, @500VDC | 100MΩ | |
| Ambient humidity | 22 - 95% RH | Altitude during operation | 5000m | |
| Storage temperature | -40°C to +85°C | Installation position | Vertical | |
| Protection degree | IP20 | MTB (Bellcore issue 6 @ 40°C, GB) | | |
| Cooling | Free air convection | 5V Model | 498000 Hours | |
| Pollution degree | 2 | 12V Model | 504000 Hours | |
| Switching frequency | | 24V Model | 520000 Hours | |
| Vi nom, Io nom | 45-60 kHz | 48V Model | 531000 Hours | |
| Isolation voltage | | Case material | Plastic: PC, UL94-V0 | |
| Input/output | 3,000/4,242 VAC/VDC | Dimensions LxWxD mm(inch) | 90(3.6) x 54(2.13) x 114(4.49) | |
| Input/FG | 1,500/2,121 VAC/VDC | Weight | 430 g | |
| Output/FG | 500/710 VAC/VDC | | | |


Norms and Standards

| | | | |
|-----------------------------|---|-----------|--|
| Vibration resistance | meet IEC 60068-2-6 (Mounting by rail: 10-500Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis) | CE | EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3, EN 61000-4-4 Level 4, EN 61000-4-5 L-Level 3, L/N-FG Level 4, EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11, ENV 50204 Level 2, EN 61204-3 |
| Shock resistance | meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 faces, 3 times for each face) | | |
| UL/cUL | UL508 listed, UL60950-1 | | |
| TUV | EN 60950-1, CB scheme EN 61558-1, EN 61558-2-17 (meet EN 60204) | | |
| ISA | 12.12.01 Class I Div 2 Groups A, B, C, D | | |


Block Diagram

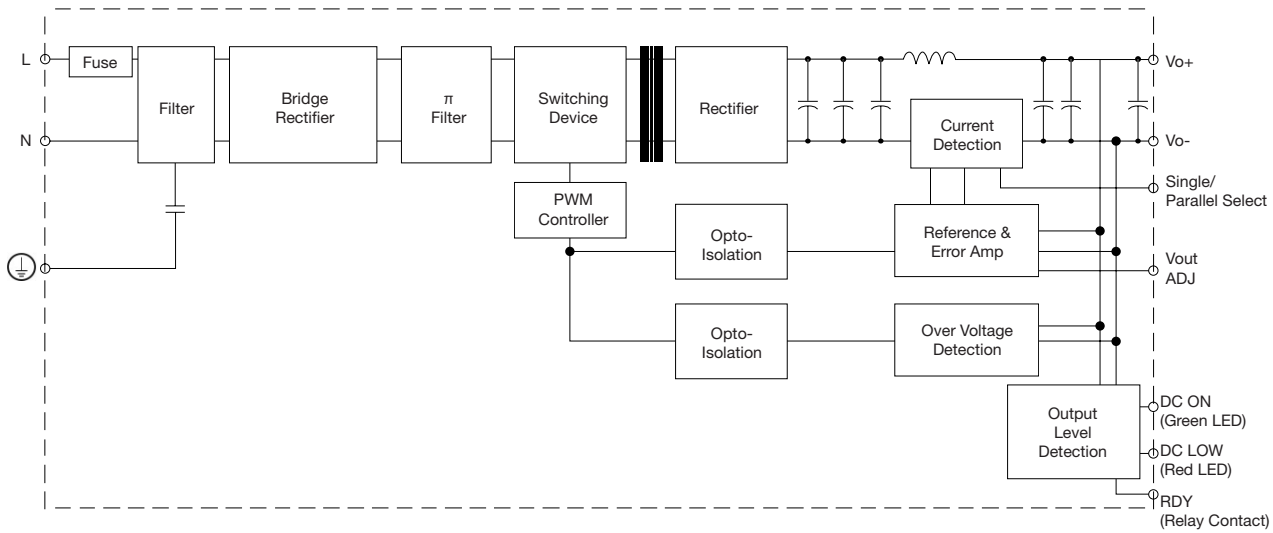


Pin Assignment and Front Controls

| Pin No. | Designation | Description |
|---------|---|--|
| 1 | RDY | A normal open relay contact for DC ON level control |
| 2 | | Never connect |
| 3, 4 | V+ | Positive output terminal |
| 5, 6 | V- | Negative output terminal |
| 7 |  | Ground this terminal to minimize high-frequency emissions |
| 8 | N | Input terminals (neutral conductor, no polarity at DC input) |
| 9 | L | Input terminals (phase conductor, no polarity at DC input) |
| | DC ON | Operation indicator LED |
| | DC LO | DC LOW voltage indicator LED |
| | Vout ADJ | Trimmer-potentiometer for Vout adjustment |


Typ. Efficiency Curve

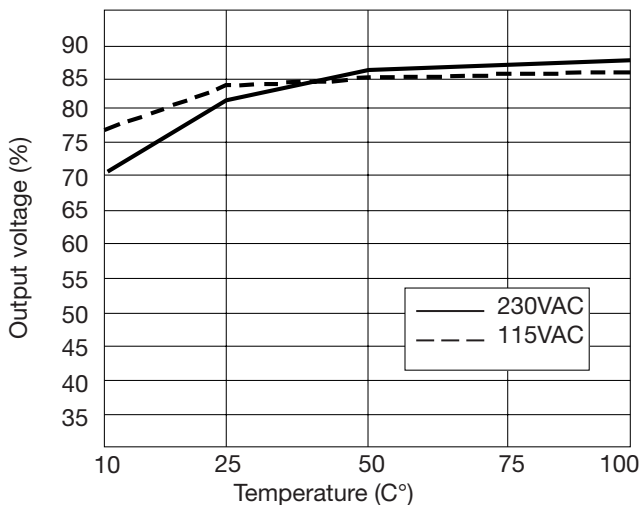

Derating Diagram

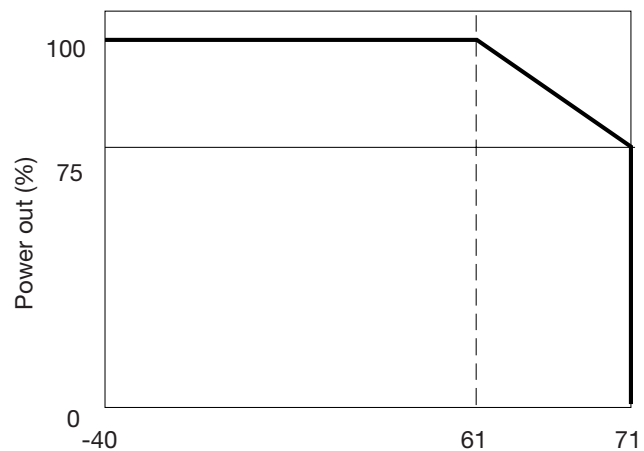

Typ. Current Limited Curve

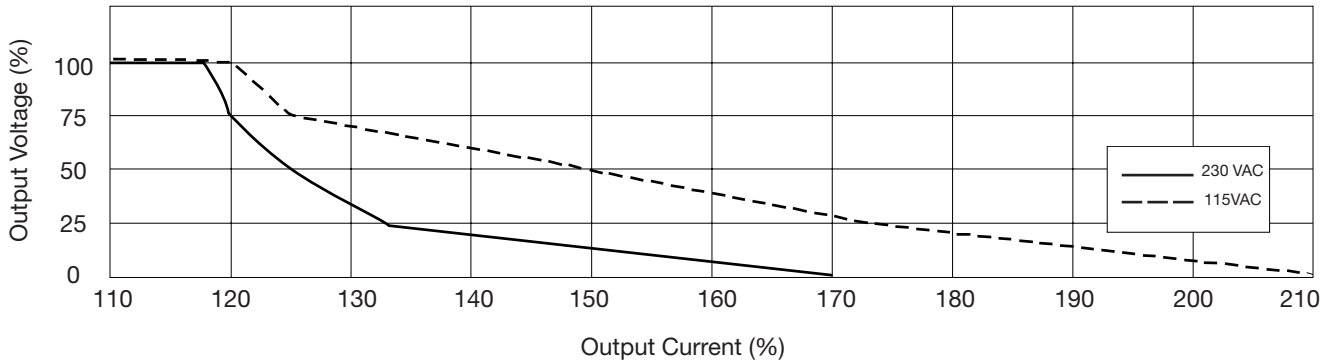

Installation

| | | | |
|---|---|--|--|
| Ventilation and cooling | Normal convection All sides 25mm free space for cooling is recommended | Max. torque for terminal Input terminal Output terminal | 0.56Nm (5.0lb-in) 0.56Nm (5.0lb-in) |
| Connector size range Spring terminal | AWG24-14 (0.2~2mm ²) flexible/solid cable, 10mm stripping at cable and recommends use copper conductors only, 60/75°C AWG26-12 (0.2~2.5mm ²) flexible/solid cable, connector can withstand torque at max 0,56Nm (5 lbs-in). 4~5 mm stripping at cable and recommends use copper conductors only, 60/75°C | General tolerance mm(in.) 0.00 (0.00) ÷ 30.00 (1.18) 30.00 (1.18) ÷ 120.00 (4.72) | ±0.30 (0.01) ±0.50 (0.02) |
| Screw terminal | | | |

Mechanical Drawings mm (inches)

