



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Switching Power Supply Type SPD 100W Bi-Phase DIN rail mounting




- Installation on DIN Rail 7.5 or 15mm
- Short circuit protection
- Input single phase 340 to 575VAC
- Passive PFC
- Power ready output on 24VDC
- LED indicator for DC power ON
- LED indicator for DC low
- Standard parallel function
- Very compact dimensions
- UL, cUL listed and TUV/CE approved
- Class I Div 2 Groups A, B, C, D approved

Product Description

This particular SPD is the most compact 100W power supply on the market. Relay output for “power ready” parallel function and PFC are included. Performances are unique with high efficiencies and the possibility of being used up to 70°C with a little derating. Furthermore it can be powered with 2 phases of a 3 phase grid system due to its high voltage input.

Ordering Key

SP D 24 100 2

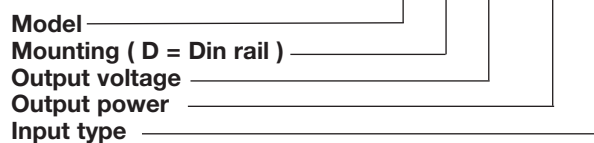

Input type: 2= single phase high voltage (bi-phase)

Approvals



Output Performances

Model	Rated output Voltage (VDC)	Output Power (W)	Output Current (A)	Voltage Trim Range 0.8 I _{o nom}		DC ON LED (VDC) Threshold at startup		DC LO LED (VDC) Threshold after startup		Typical Efficiency
				Min. VDC	Max. VDC	Min.	Max.	Min.	Max.	
SPD12100	12	100.8	8.4	11.4	14.5	10	11.2	10	11.2	86%
SPD24100	24	100.8	4.2	22.5	28.5	17.6	19.4	17.6	19.4	87%
SPD48100	48	100.8	2.1	47.0	56.0	37.0	43.0	37.0	43.0	89%

Output Data

Output voltage accuracy	-0 +1% max (factory adjusted)
Line regulation	± 1%
Load regulation	± 1%
Non parallel model	± 1%
Parallel model	± 5%
Temp. coefficient	± 0.03% / °C
Ripple and noise	50mV
V _{i nom} , I _{o nom} , BW=20MHz	
Rated continuous Loading	8.4A @ 12VDC / 6.9A @ 14.5VDC 4.2A @ 24VDC / 3.5A @ 28.5VDC 2.1A @ 48VDC / 1.8A @ 56VDC
Fall Time	150ms
Transient recovery time	
V _{i nom} , I _o = 0.5 x I _{o nom}	2ms
Turn On Time	
V _{i nom} , I _{o nom}	1.0s
V _{i nom} , I _{o nom} with Capacitor load	1.5s

Rise Time	
V _{i nom} , I _{o nom}	150ms
V _{i nom} , I _{o nom} with Capacitor load	500ms
Capacitor Load	
12V, 24V versions	7000µF
48V version	3500µF
Reverse Voltage Immunity	
12V	18V
24V	35V
48V	63V
Hold up Time V _{i nom} I _{o max}	20ms
Minimum load V _{i nom}	0%
Parallel Operation	2 units max.
0.1 I _{o min} ~ 0.9 I _{o max}	



Input Data

Rated input voltage	400/500VAC	Frequency range	47 - 63Hz
Voltage range AC in DC in	340 - 575VAC 480 - 820VDC	Internal Voltage Surge Protection (acc. to IEC61000-4-5)	Varistor
Rated input current	0.48A / 0.75A	Leakage Current Input / Output Input / FG	0.25mA 3.5mA
Power dissipation 12V 24V 48V	15.0W 13.0W 10.5W	Inrush current	10A
		P.F.C.	0.55

Controls and Protections

Input Fuse	2A/600VAC internal ¹⁾	Input Voltage Surge Protection	Varistor
Output Short Circuit	current limit	Power ready (only SPD241002) Threshold at start up (contact closed) Contact rating at 60VDC Insulation	Min. 17.6VDC - Max.19.4VDC 0.3A 500VDC
Rated Overload Protection	115 - 135%		
Over voltage protection (auto recovery) 12V model 24V model 48V model	14.5V to 17.4V 30.0V to 33.0V 60.0V to 66.0V		

¹⁾ Fuse not replaceable by user

General Data (@ nominal line, full load, 25°C)


Ambient temperature	-25°C to 71°C	MTBF (Bellcore Issue 6@40°C), GB 12V model 24V model 48V model	622.000h 661.000h 672.000h
Derating (>61°C to +71°C)	2.5% / °C	Altitude during operation	3.000m
Ambient humidity	20 to 95%RH	Case material	Plastic
Storage	-25°C to +85°C	Dimensions L x W x D	90 x 54 x 114mm
Pollution degree	2	Weight	500g
Protection degree	IP20		
Cooling	Free air convection		
Switching frequency	45kHz		

Approvals and EMC

Insulation voltage Input / Output Input / FG	3.000VAC / 4242VDC 1500VAC / 2121VDC	CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3 EN 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3 EN 61000-4-4 Level 4, EN 61000-4-5 L-N Level 3, L / N-FG Level 4 EN 61000-4-6 Level 3, EN 61000-4-8 Level 4, EN 61000-4-11 ENV 50204 Level 2, EN 61204-3
Insulation resistance	100MΩ min		
Shock resistance	acc. to IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)		
Vibration resistance	acc. to IEC 60068-2-6 (Mounting by rail: 10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)		
UL / cUL	UL 508 Listed UL 60950-1		
TUV	EN 60950-1, CB scheme EN 61558-1, EN 61558-2-17 (acc.to EN 60204)		
ISA	12.12.01 Class I Div 2 Groups A, B, C, D		



Block Diagrams

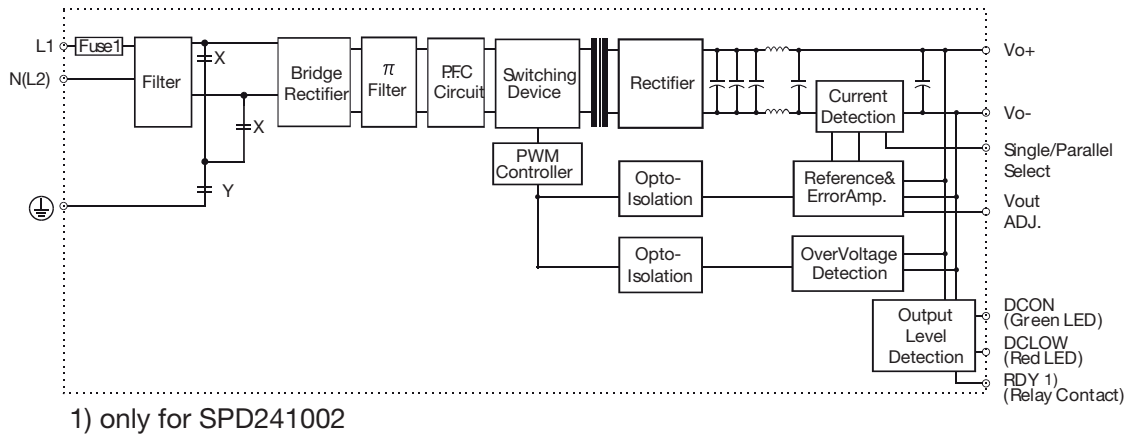


Pin Assignment and Front Controls

Pin No.	Designation	Description
1	RDY	NO relay contact for DC OK (only SPD241002)
2	RDY	NO relay contact for DC OK (only SPD241002)
3	V+	Positive output terminal
4	V+	Positive output terminal
5	V-	Negative output terminal
6	V-	Negative output terminal
7	GND	Ground terminal to minimise High frequency emissions
8	N or L2	Neutral or phase 2 (no polarity with DC input)
9	L1	Phase 1 (no polarity with DC input)
L1	DC ON	DC output ready LED
L2	DC LO	DC low indicator LED
POT1	Vout ADJ.	Trimmer for fine output voltage adjustment
SW1	S/P	Single / Parallel select switch


Typ. Current Limited Curve

SPD241002 / 400VAC

SPD241002 / 500VAC

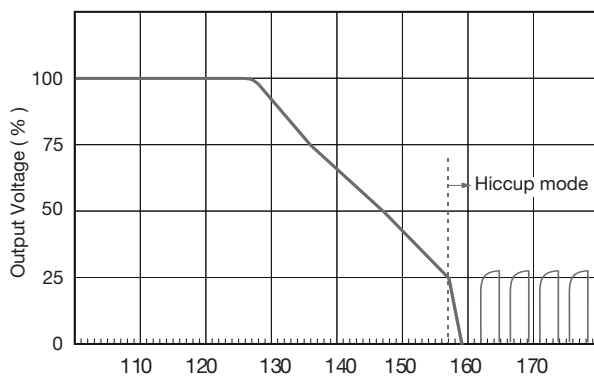


Power Out (%)

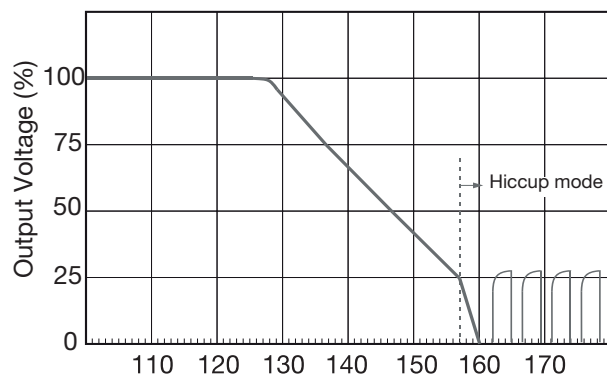


Power Out (%)


Typ. Efficiency Curve

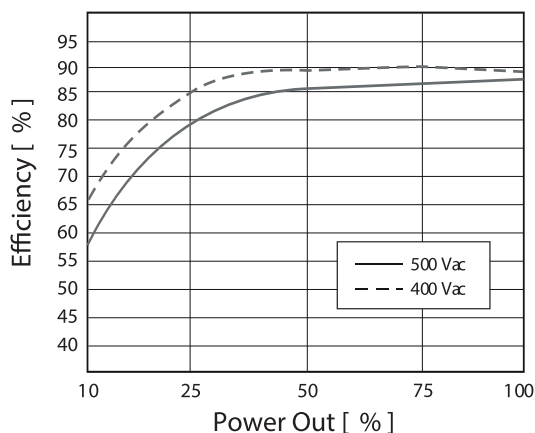

Derating Diagram

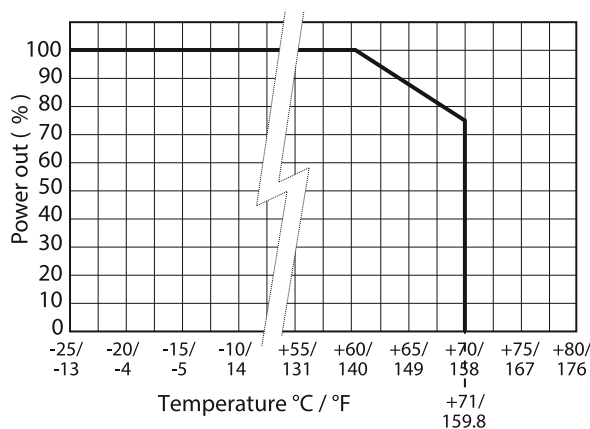

Mechanical Drawings mm (inches)

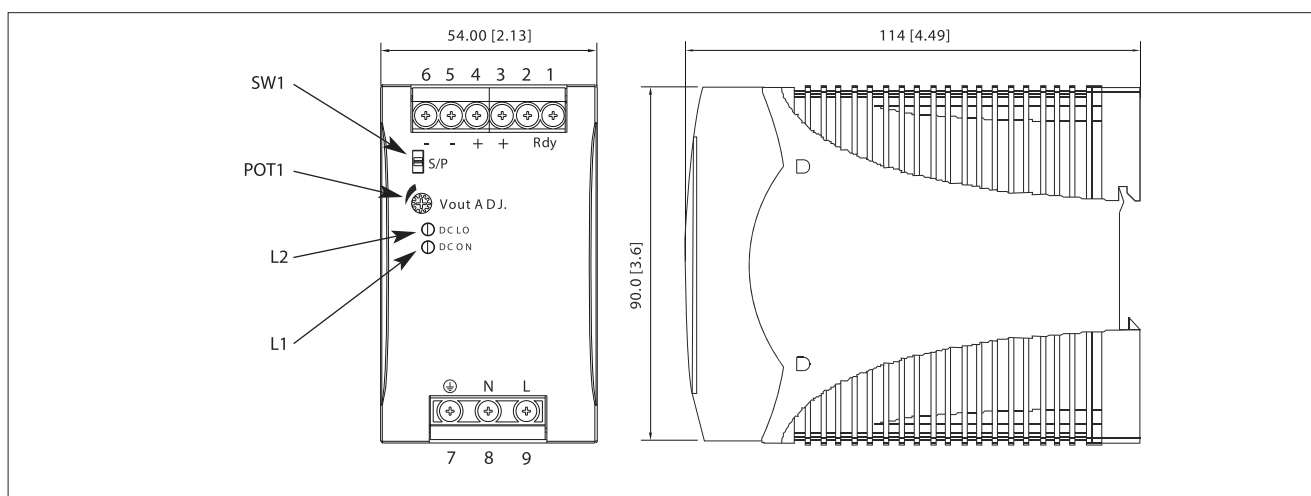

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Screw terminals cable 8mm stripping recommend	10-24AWG flexible or solid
Max. torque for screws terminals Input terminals Output terminals	1.008Nm (9.0lb-in) 0.616Nm (5.5lb-in)
Plug-in connectors cable 7mm stripping recommend	10-24AWG flexible or solid
Max. torque for plug-in terminals Input terminals Output terminals	0.784Nm (7.0lb-in) 0.784Nm (7.0lb-in)
Recommended circuit breaker	3A / 5A / 6A B, D characteristics