



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## OptiMOS® Power-Transistor

### Feature

- N-Channel
- Enhancement mode
- Logic Level
- Excellent Gate Charge x  $R_{DS(on)}$  product (FOM)
- Superior thermal resistance
- 175°C operating temperature
- Avalanche rated
- $dv/dt$  rated


### Product Summary

$V_{DS}$	30	V
$R_{DS(on)}$	8.4	m $\Omega$
$I_D$	73	A


P- TO262 -3-1

P- TO263 -3-2

P- TO220 -3-1

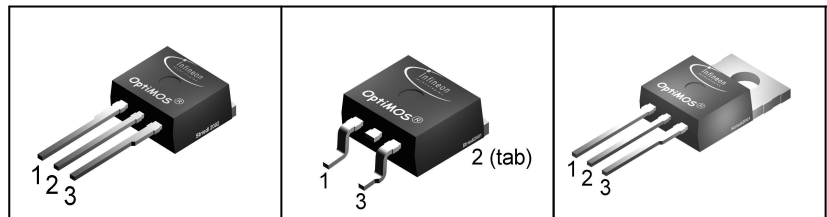

Type	Package	Ordering Code	Marking
SPP73N03S2L-08	P- TO220 -3-1	Q67042-S4037	2N03L08
SPB73N03S2L-08	P- TO263 -3-2	Q67042-S4036	2N03L08
SPI73N03S2L-08	P- TO262 -3-1	Q67042-S4081	2N03L08



### Maximum Ratings, at $T_j = 25^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current <sup>1)</sup> $T_C=25^\circ\text{C}$ , <sup>1)</sup>	$I_D$	73 62	A
Pulsed drain current $T_C=25^\circ\text{C}$	$I_{D \text{ puls}}$	320	
Avalanche energy, single pulse $I_D=73\text{A}$ , $V_{DD}=25\text{V}$ , $R_{GS}=25\Omega$	$E_{AS}$	170	mJ
Repetitive avalanche energy, limited by $T_{jmax}^{2)}$	$E_{AR}$	10	
Reverse diode $dv/dt$ $I_S=73\text{A}$ , $V_{DS}=24$ , $di/dt=200\text{A}/\mu\text{s}$ , $T_{jmax}=175^\circ\text{C}$	$dv/dt$	6	kV/ $\mu\text{s}$
Gate source voltage	$V_{GS}$	$\pm 20$	V
Power dissipation $T_C=25^\circ\text{C}$	$P_{tot}$	107	W
Operating and storage temperature	$T_i, T_{sta}$	-55... +175	$^\circ\text{C}$
IEC climatic category; DIN IEC 68-1		55/175/56	

### Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Characteristics</b>					
Thermal resistance, junction - case	$R_{thJC}$	-	0.9	1.4	K/W
SMD version, device on PCB:	$R_{thJA}$				
@ min. footprint		-	-	62	
@ 6 cm <sup>2</sup> cooling area <sup>3)</sup>		-	-	40	

### Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Static Characteristics</b>					
Drain-source breakdown voltage $V_{GS}=0V, I_D=1mA$	$V_{(BR)DSS}$	30	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D=55\mu A$	$V_{GS(th)}$	1.2	1.6	2	
Zero gate voltage drain current $V_{DS}=30V, V_{GS}=0V, T_j=25^\circ C$ $V_{DS}=30V, V_{GS}=0V, T_j=175^\circ C$	$I_{DSS}$	-	0.01	1	$\mu A$
		-	10	100	
Gate-source leakage current $V_{GS}=20V, V_{DS}=0V$	$I_{GSS}$	-	1	100	nA
Drain-source on-state resistance $V_{GS}=4.5V, I_D=36A$ $V_{GS}=4.5V, I_D=36A, \text{SMD version}$	$R_{DS(on)}$	-	9.9	13.4	m $\Omega$
		-	9.5	13.1	
Drain-source on-state resistance <sup>4)</sup> $V_{GS}=10V, I_D=36A$ $V_{GS}=10V, I_D=36A, \text{SMD version}$	$R_{DS(on)}$	-	6.8	8.4	
		-	6.5	8.1	

<sup>1</sup>Current limited by bondwire ; with an  $R_{thJC} = 1.4K/W$  the chip is able to carry  $I_D= 87A$  at  $25^\circ C$ , for detailed information see app.-note ANPS071E available at [www.infineon.com/optimos](http://www.infineon.com/optimos)

<sup>2</sup>Defined by design. Not subject to production test.

<sup>3</sup>Device on 40mm\*40mm\*1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70  $\mu m$  thick) copper area for drain connection. PCB is vertical without blown air.

<sup>4</sup>Diagrams are related to straight lead versions

### Electrical Characteristics

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

### Dynamic Characteristics

Transconductance	$g_{fs}$	$V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$ , $I_D = 62A$	32	63	-	S
Input capacitance	$C_{iss}$	$V_{GS} = 0V$ , $V_{DS} = 25V$ , $f = 1MHz$	-	1290	1710	pF
Output capacitance	$C_{oss}$		-	500	670	
Reverse transfer capacitance	$C_{rss}$		-	130	190	
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15V$ , $V_{GS} = 10V$ , $I_D = 18A$ , $R_G = 4.7\Omega$	-	7.7	11.6	ns
Rise time	$t_r$		-	20	30	
Turn-off delay time	$t_{d(off)}$		-	31.5	47.3	
Fall time	$t_f$		-	19	28.5	

### Gate Charge Characteristics

Gate to source charge	$Q_{gs}$	$V_{DD} = 24V$ , $I_D = 36A$	-	4	5	nC
Gate to drain charge	$Q_{gd}$		-	12	18	
Gate charge total	$Q_g$	$V_{DD} = 24V$ , $I_D = 36A$ , $V_{GS} = 0$ to $10V$	-	34.7	46.2	
Gate plateau voltage	$V_{(plateau)}$	$V_{DD} = 24V$ , $I_D = 36A$	-	3.6	-	V


### Reverse Diode

Inverse diode continuous forward current	$I_S$	$T_C = 25^\circ C$	-	-	73	A
Inv. diode direct current, pulsed	$I_{SM}$		-	-	320	
Inverse diode forward voltage	$V_{SD}$	$V_{GS} = 0V$ , $I_F = 73A$	-	0.96	1.28	V
Reverse recovery time	$t_{rr}$	$V_R = 15V$ , $I_F = I_S$ , $di_F/dt = 100A/\mu s$	-	27	40	ns
Reverse recovery charge	$Q_{rr}$		-	21	31	

### 1 Power dissipation

$$P_{tot} = f(T_C)$$


parameter:  $V_{GS} \geq 4 \text{ V}$

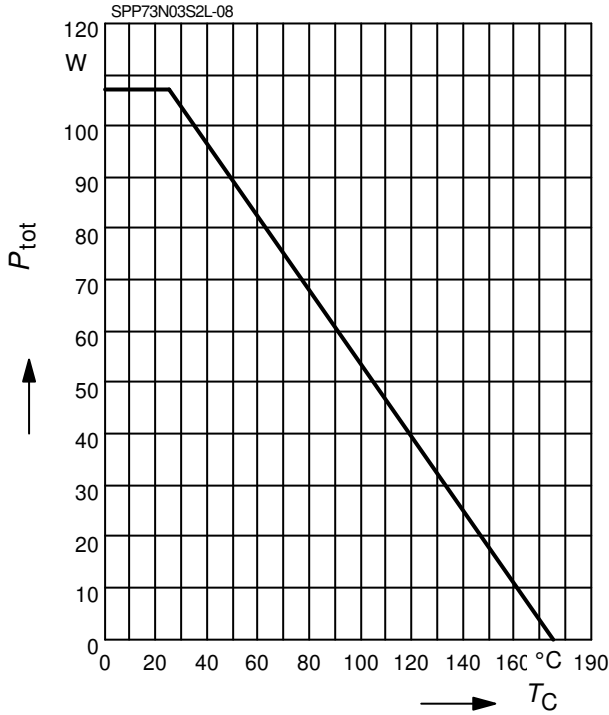

### 2 Drain current

$$I_D = f(T_C)$$


parameter:  $V_{GS} \geq 10 \text{ V}$

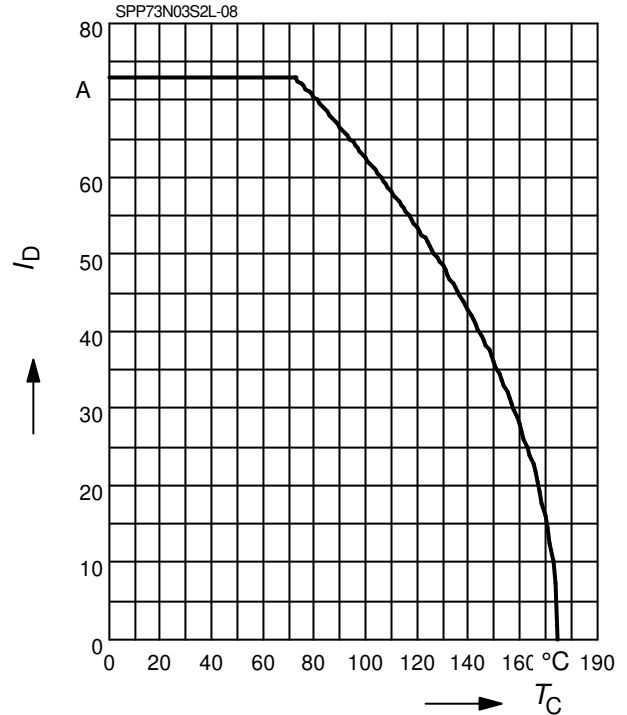

### 3 Safe operating area

$$I_D = f(V_{DS})$$


parameter:  $D = 0$ ,  $T_C = 25 \text{ °C}$

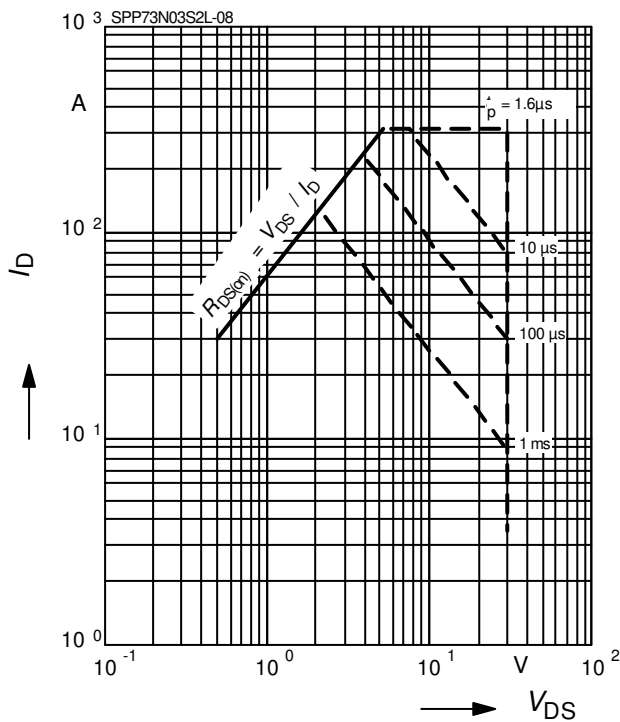

### 4 Max. transient thermal impedance

$$Z_{thJC} = f(t_p)$$


parameter:  $D = t_p/T$

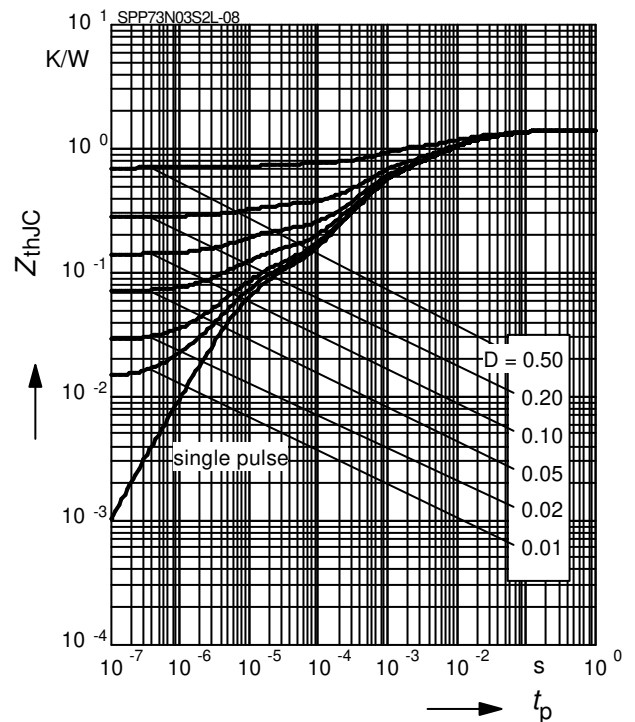

### 5 Typ. output characteristic

$$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$$


parameter:  $t_p = 80 \mu\text{s}$

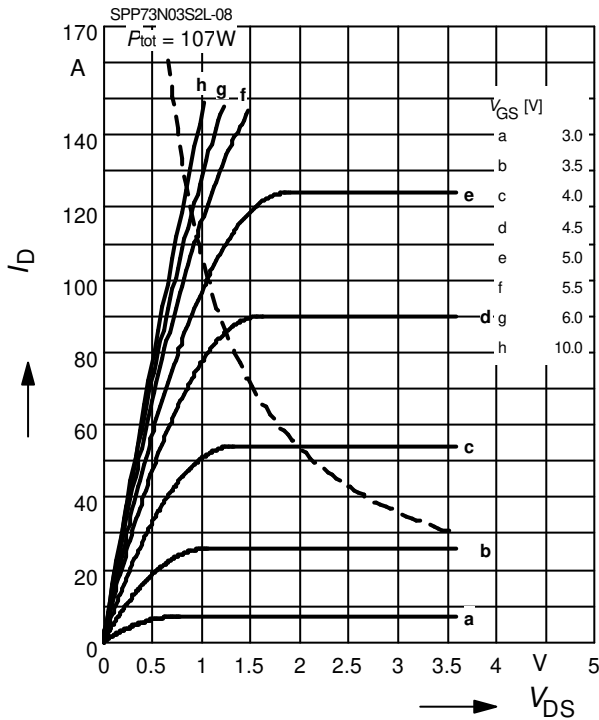

### 6 Typ. drain-source on resistance

$$R_{DS(\text{on})} = f(I_D)$$


parameter:  $V_{GS}$

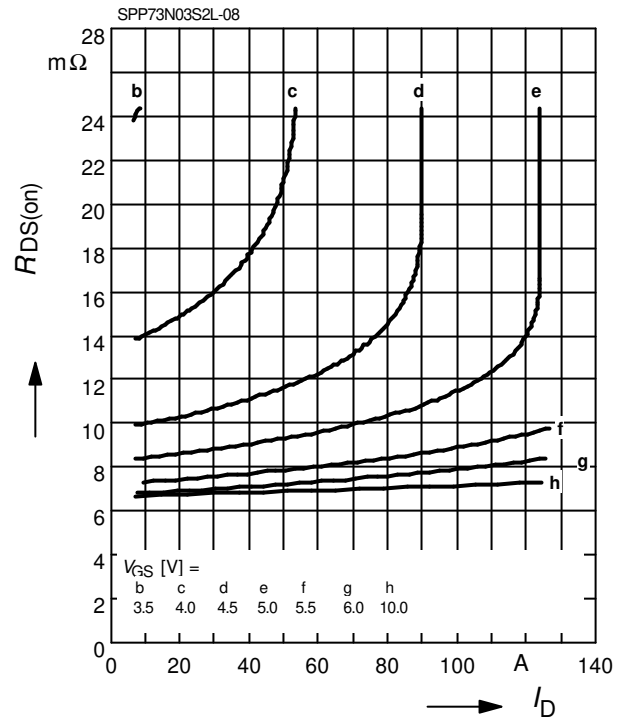

### 7 Typ. transfer characteristics

$$I_D = f(V_{GS}); V_{DS} \geq 2 \times I_D \times R_{DS(\text{on})\text{max}}$$


parameter:  $t_p = 80 \mu\text{s}$

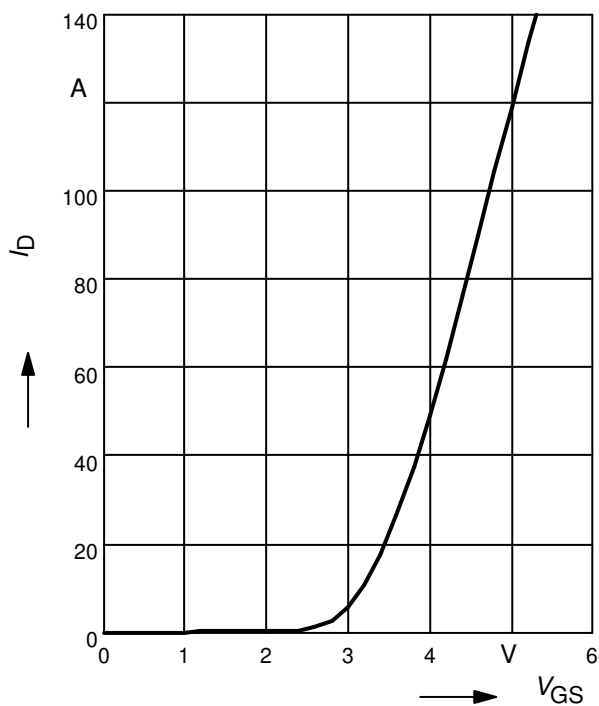

### 8 Typ. forward transconductance

$$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$$


parameter:  $g_{fs}$

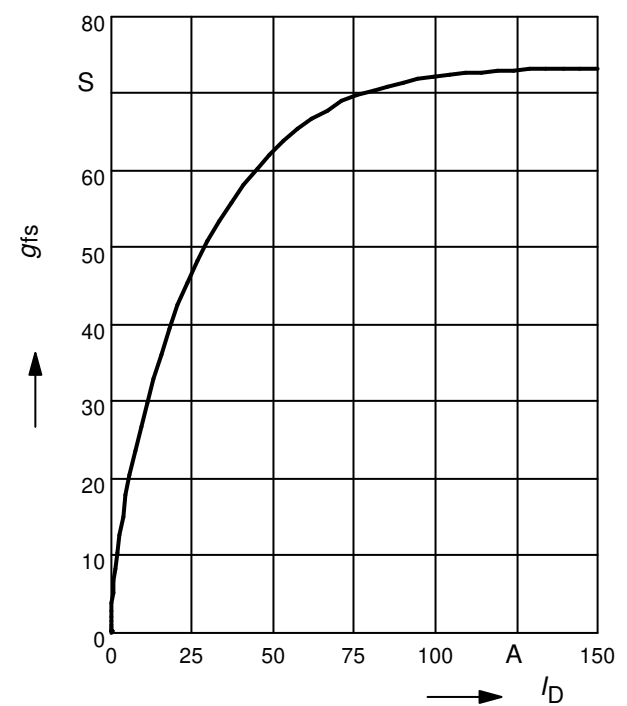

### 9 Drain-source on-state resistance

$$R_{DS(on)} = f(T_j)$$


parameter:  $I_D = 36\text{ A}$ ,  $V_{GS} = 10\text{ V}$

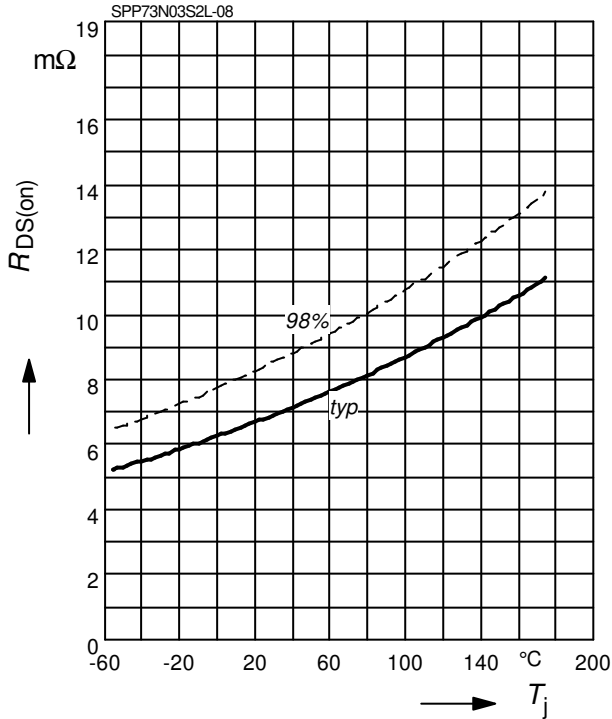

### 10 Typ. gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter:  $V_{GS} = V_{DS}$

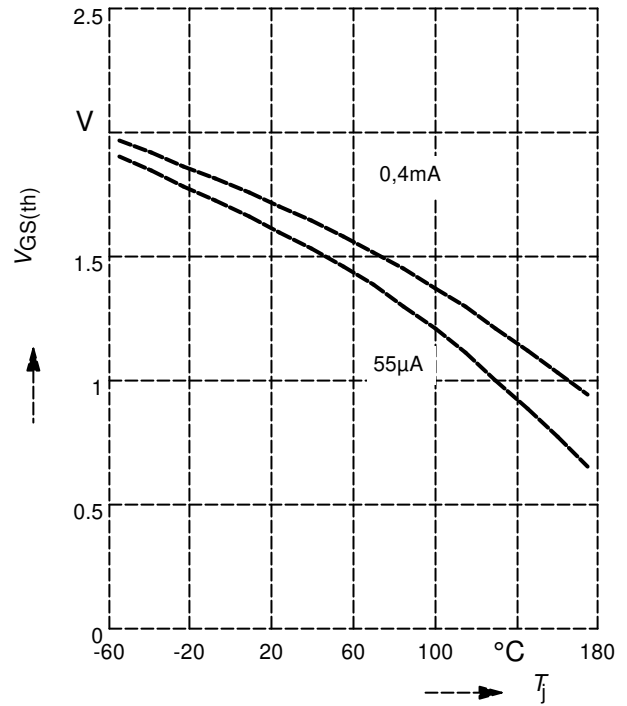

### 11 Typ. capacitances

$$C = f(V_{DS})$$


parameter:  $V_{GS} = 0\text{ V}$ ,  $f = 1\text{ MHz}$

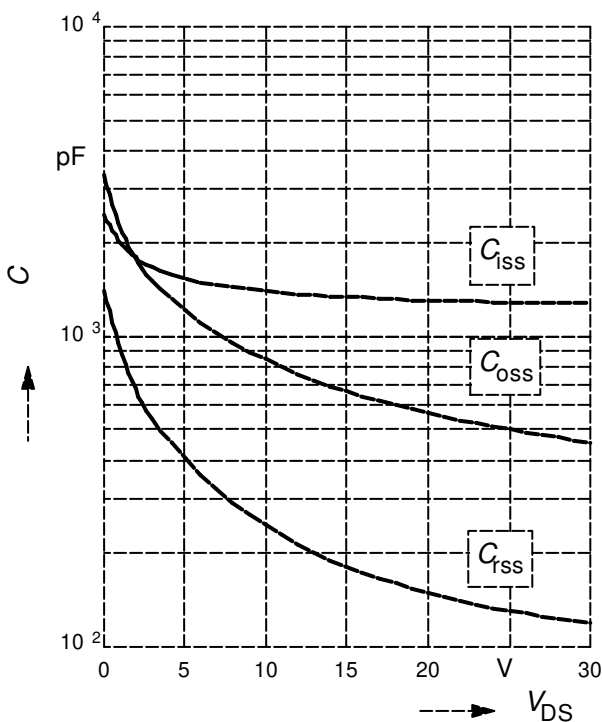

### 12 Forward character. of reverse diode

$$I_F = f(V_{SD})$$


parameter:  $T_j$ ,  $t_p = 80\ \mu\text{s}$

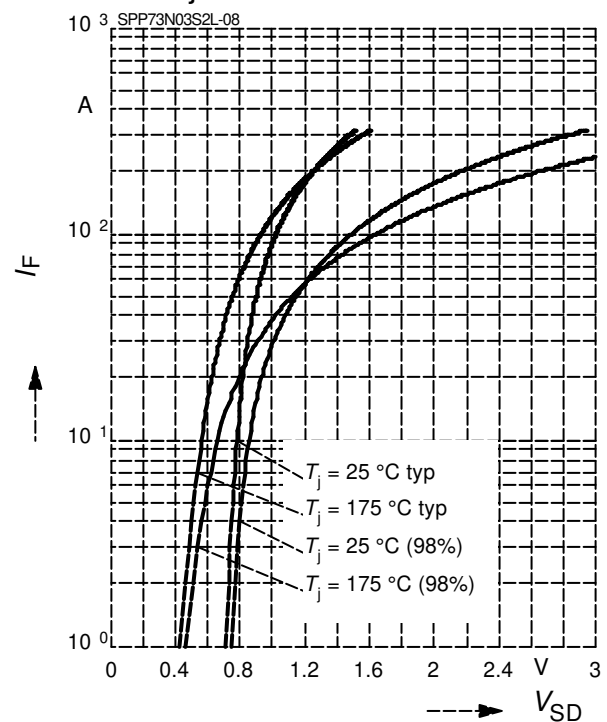

### 13 Typ. avalanche energy

$$E_{AS} = f(T_j)$$


par.:  $I_D = 73\text{A}$ ,  $V_{DD} = 25\text{V}$ ,  $R_{GS} = 25\ \Omega$

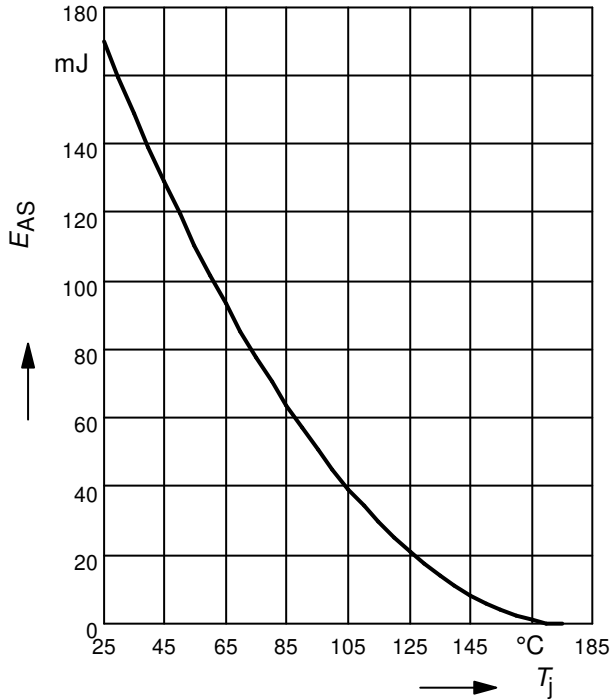

### 14 Typ. gate charge

$$V_{GS} = f(Q_{Gate})$$


parameter:  $I_D = 36\text{A}$  pulsed

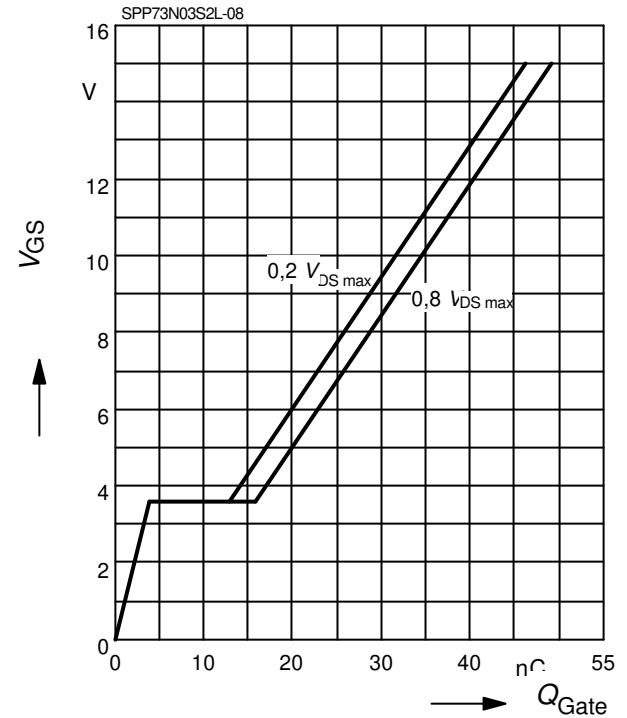

### 15 Drain-source breakdown voltage

$$V_{(BR)DSS} = f(T_j)$$

parameter:  $I_D = 10\text{mA}$

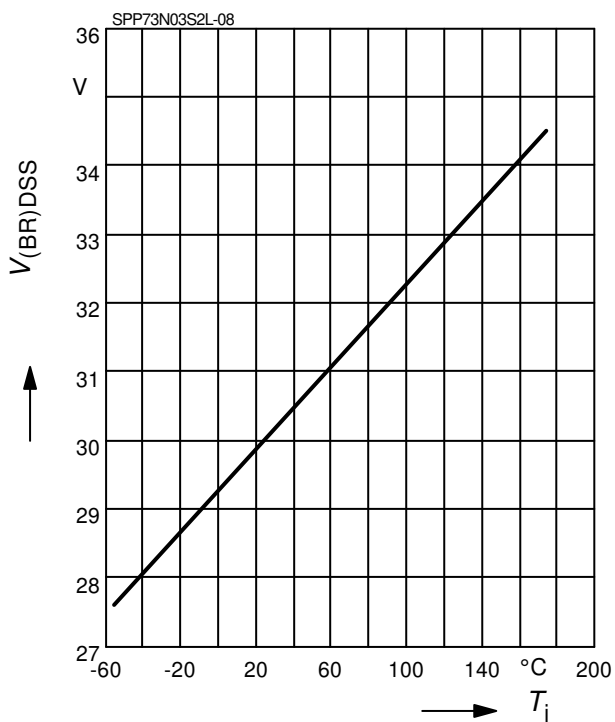



**Published by**  
**Infineon Technologies AG,**  
**Bereichs Kommunikation**  
**St.-Martin-Strasse 53,**  
**D-81541 München**  
**© Infineon Technologies AG 1999**  
**All Rights Reserved.**

**Attention please!**

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

**Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

**Warnings**

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

**Further information**

Please notice that the part number is BSPP73N03S2L-08, BSPB73N03S2L-08 and BSPI73N03S2L-08, for simplicity the device is referred to by the term SPP73N03S2L-08, SPB73N03S2L-08 and SPI73N03S2L-08 throughout this documentation