



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SPSx Family

## Battery Free Wireless Sensor

ON Semiconductor's family of Battery Free Wireless Sensors are UHF RFID wireless sensors which use the MagnusS2<sup>®</sup> Sensor IC and can perform either moisture/proximity or temperature/proximity sensing functions in a variety of applications where size and accessibility are at a premium.

Battery Free Wireless Sensors digitize sensed moisture detection/level or temperature information which can then be read by a standard UHF RFID Gen 2 compliant reader. Sensor tags function in either the FCC defined UHF band or the ETSI UHF band.

### Features

- Single IC, Battery Free Wireless Sensing
- Small Form Factor Packages
- 64 bit TID and 128 bit EPC + 144 bit User Defined Memory
- EPC Class 1 Gen 2 v.2.0.0 ISO 18 000–6C Compliant
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted)

Rating	Symbol	Max	Unit
Human Body Model (Note 1)	ESD	±1	kV

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Junction and Storage Temperature Range (Note 2)	T <sub>J</sub> , T <sub>stg</sub>	-40 to +85	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Non-repetitive current pulse at T<sub>A</sub> = 25°C, per JS-001 waveform.
2. Shelf Life – minimum 2 years from date of manufacturing.




**ON Semiconductor<sup>®</sup>**


[www.onsemi.com](http://www.onsemi.com)

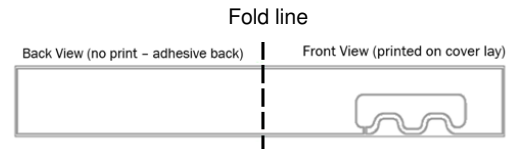


SPS1M001 – CASES 888AH/888AJ

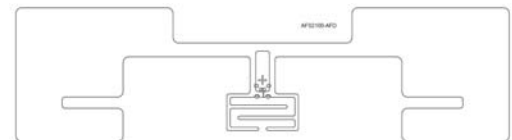

SPS1M002 – CASES 888AD/888AE



SPS1M003 – CASES 888AB/888AC

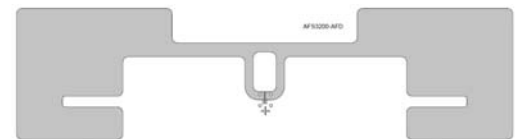

SPS2T001 – CASES 888AF/888AG

### ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

This document contains information on some products that are still under development. ON Semiconductor reserves the right to change or discontinue these products without notice.

# SPSx Family

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Device	Frequency (MHz)		Read Sensitivity (dBm)	TID (Bits)	EPC (Bits)	ROM (Bits)
	Min	Max	Min	Min	Min	Min
SPS1M001	860	960	-16	64	128	144
SPS1M002	860	960	-16	64	128	144
SPS1M003	860	960	-16	64	128	144
SPS2T001	860	960	-16	64	128	176

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

## SENSOR TAG DESCRIPTIONS

### SPS1M001 – Quality Control Water Intrusion Sensor Tag

The quality control water intrusion sensor tag is specifically designed for the passive sensing of moisture in finished goods as a form of leak detection. The sensors can be placed in specific areas of the object and greatly simplifies the quality control test for leaks. This Battery Free Wireless Sensor can reduce the number of missed defects and significantly improve the quality manufacturing lines.

### SPS1M002 – Moisture Level Detection Sensor Tag

The moisture level detection sensor tag is specifically designed for the passive sensing of moisture on various surfaces and finished goods such as plastics, wood, and plaster. The tag digitizes sensed moisture detection/level information which can be read by a standard UHF RFID Gen 2 compliant reader. This Battery Free Wireless Sensor can greatly enhance the reliability of the end product and offer many benefits for deployment in industrial settings.

### SPS1M003 – High Sensitivity Moisture Level Detection Sensor Tag

The high sensitivity moisture level detection sensor tag is specifically designed for the passive sensing of moisture that does not touch the tag. This high sensitivity allows the tag to detect moisture through layers of material making it ideal for applications where the tag cannot be placed directly in the area of interest. The tag digitizes sensed moisture detection/level information which can be read by a standard UHF RFID Gen 2 compliant reader. This Battery Free Wireless Sensor can offer many benefits for deployment in a variety of settings.

### SPS2T001 – Temperature Sensor Tag

The temperature sensor tag is specifically designed for the passive sensing of temperature experienced by the tag. The tag digitizes the sensed temperature which can be read by a standard UHF RFID Gen 2 compliant reader. This Battery Free Wireless Sensor can offer many benefits for deployment in industrial as well as agricultural settings.


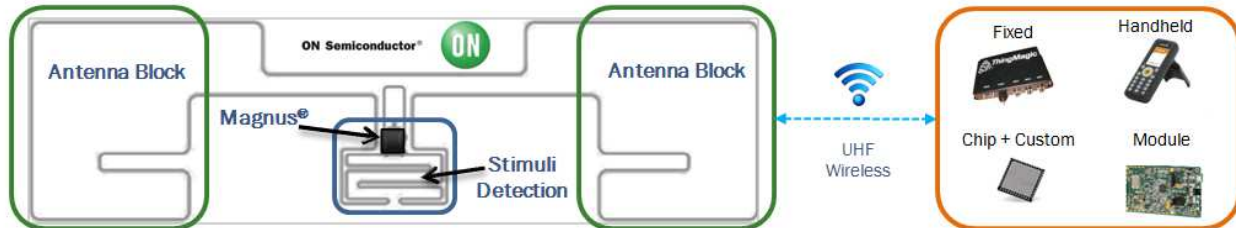


Figure 1. Battery Free Wireless Sensor Functional Block Diagram

# SPSx Family

## Ecosystem Components

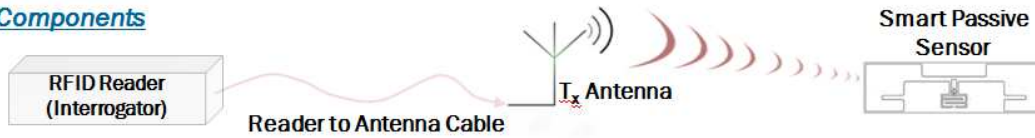

### Fixed (Plug-in) Form Factors


AC powered processor w/ separate display & wired antenna

- **Pros:** Long range, Fast read time, Customizable software, Continuous/Automated Reading
- **Cons:** Increased engineering time for ecosystem setup

### Handheld (Portable) Form Factor

Battery powered processor/display/antenna all-in-one

- **Pros:** Portable, No connections, Easy setup, Simple interface
- **Cons:** Reduced range, Longer read time

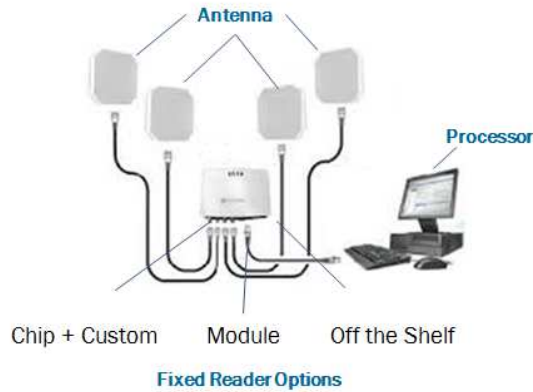

**Handheld**  
Reader + Antenna + Processor all in one

**Figure 2. Battery Free Wireless Sensor Ecosystem Components**

## SPSx Family

Evaluating the performance of sensor tags in final application can be done with the SPS1M–EVK Battery Free Wireless Sensor Handheld Evaluation. The system consists of the handheld reader, charger, cradle, and sample sensor tags. The reader is pre-loaded with application software which reads sensor tags and reports results with a single

button click. If the reader sees more than one sensor tag, it will measure the tag with the highest reported received power, and ignore the others. For more detailed information on the operation of the SPS1M–EVK please refer to EVBUM2324/D.

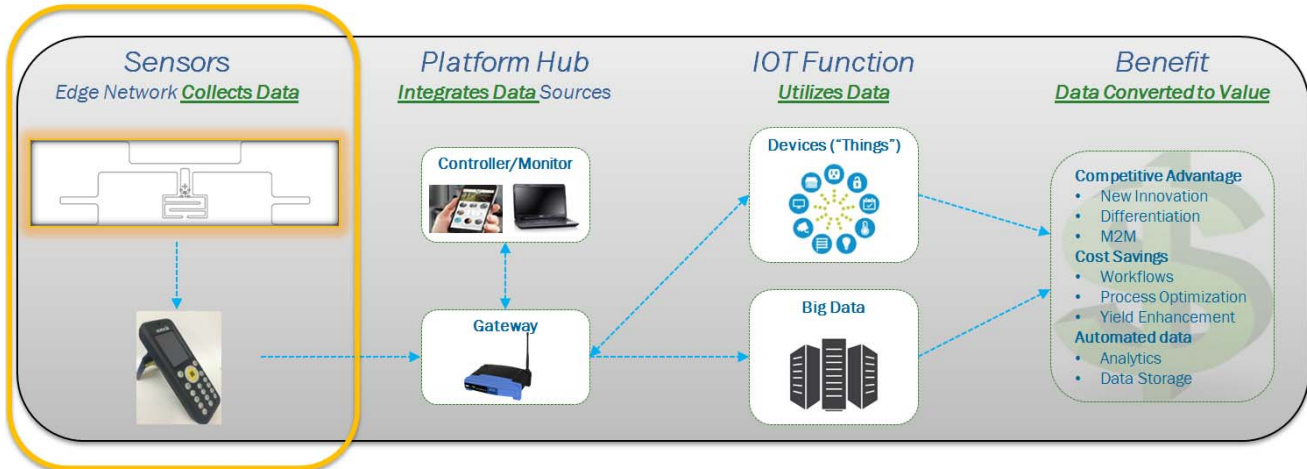


Figure 3. SPS1M–EVK Evaluation Kit within an IoT System

The SensorRF–GEVK IoT Development Platform enables the exploration and development of applications using battery-free wireless sensors built around the Magnus–S chip. This development kit integrates the

features of a platform hub which collects sensor data using an external antenna and then seamlessly incorporate this data into multiple backend network interfaces.

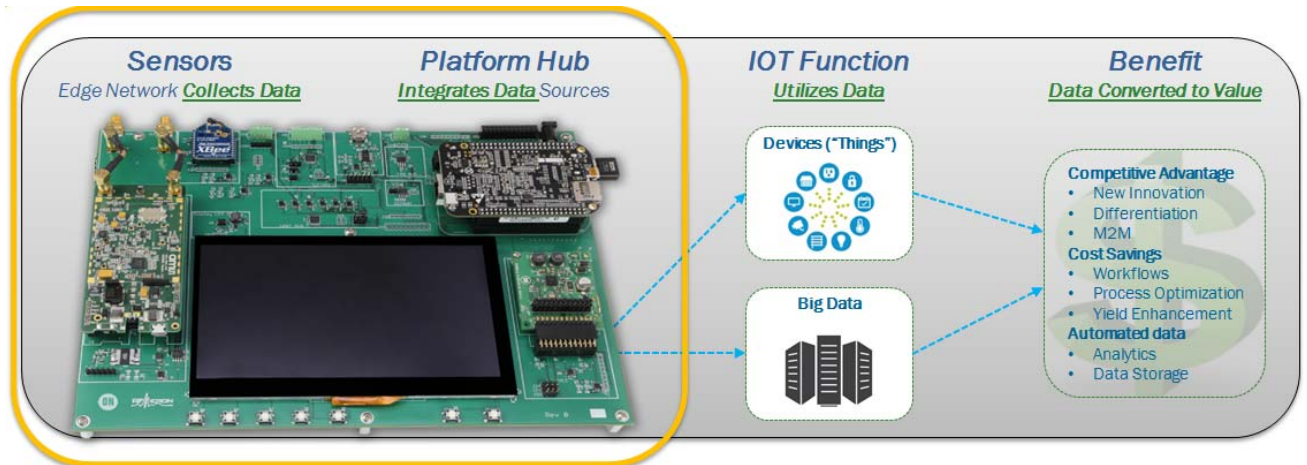




Figure 4. SensorRF–GEVK Developers Kit within an IoT System

# SPSx Family

## Readers with Verified Functionality for ON Semiconductor Smart Passive Sensor Tags

Manufacturer	Model <small>(click for link to full spec)</small>	Type	Max Power (dBm)	Max Power (W)	Dimensions (mm)	# Antennas (Max)	Reads Temperature	Reads Moisture	Reads Pressure
NordicID	 <a href="#">Morphic</a> or <a href="#">SPS1M-EVK</a>	Handheld	27	0.5	147 x 54 x 35	1	Yes	Yes	Yes
	<a href="#">Merlin</a>	Handheld	30	1	250 x 105 x 175	1	Yes	Yes	Yes
	<a href="#">AR52</a>	Fixed	30	1	210 x 121 x 31	16	Yes	Yes	Yes
ThingMagic	<a href="#">M6</a>	Fixed	31.5	1.4	190 x 178 x 34	4	Lower Resolution <sup>2</sup>	Yes	Yes
	<a href="#">M6e</a>	Module	31.5	1.4	69 x 43 x 7.5	4	Lower Resolution <sup>2</sup>	Yes	Yes
Impinj	<a href="#">Speedway</a>	Fixed	32.5	1.8	190 x 175 x 30	4	Lower Resolution <sup>2</sup>	Yes	Yes
Zebra	<a href="#">FX9500</a>	Fixed	33	2	273 x 184 x 50	8	Lower Resolution <sup>5</sup>	Yes	Yes
Thinkify	<a href="#">IR-265</a>	Fixed	27	0.5	140 x 102 x 33	1	Yes	Yes	Yes
ON Semiconductor	 <a href="#">SensorRF-GEVK</a>	SPS Developer Kit	30	1	279 x 216 x 51	2	Yes	Yes	Yes

## ORDERING INFORMATION


Device	Feature	UHF Band	Attach Material	Package Case Code	Shipping <sup>†</sup>
SPS1M001A	Moisture	FCC 902–928 MHz	Metal	888AJ	500 / Bulk Bag
SPS1M002A	Moisture		Non–metal	888AD	500 / Reel
SPS1M003A	Moisture		Non–metal	888AB	500 / Reel
SPS2T001A	Temperature		Non–metal	888AF	500 / Reel
SPS1M001B	Moisture	ETSI 866–868 MHz	Metal	888AH	500 / Bulk Bag
SPS1M002B	Moisture		Non–metal	888AE	500 / Reel
SPS1M003B	Moisture		Non–metal	888AC	500 / Reel
SPS2T001B	Temperature		Non–metal	888AG	500 / Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# SPSx Family

## PACKAGE DIMENSIONS

**RF TAG 99.5x11.12mm**  
**CASE 888AB**  
**ISSUE O**

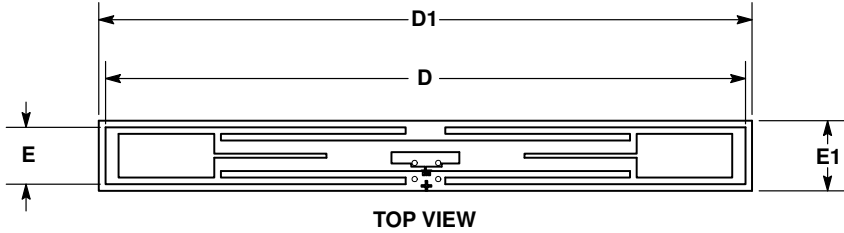


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS	
	MIN	MAX
D	96.90	97.10
E	8.52	8.72
D1	98.50	99.50
E1	10.12	11.12

**RF TAG 104.5x11.12mm**  
**CASE 888AC**  
**ISSUE O**

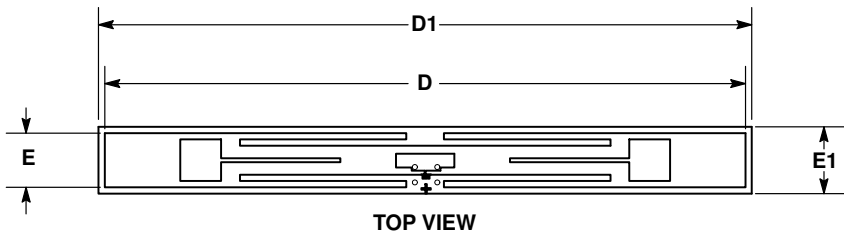

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS	
	MIN	MAX
D	101.90	102.10
E	8.52	8.72
D1	103.50	104.50
E1	10.12	11.12

# SPSx Family

## PACKAGE DIMENSIONS

RF TAG 91.5x26.5mm  
CASE 888AD  
ISSUE O

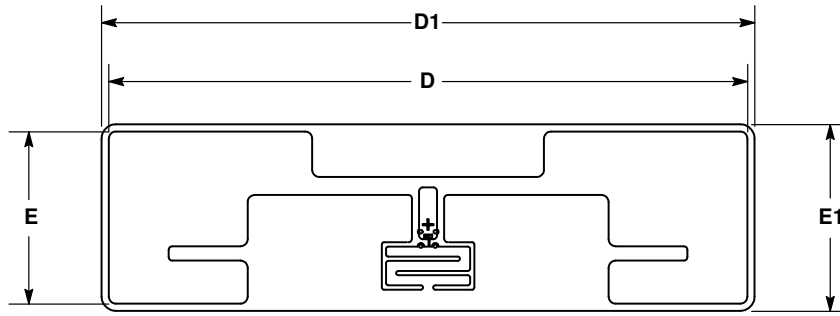


TOP VIEW

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS	
	MIN	MAX
D	88.90	89.10
E	23.90	24.10
D1	90.50	91.50
E1	25.50	26.50

RF TAG 96.5x26.5mm  
CASE 888AE  
ISSUE O

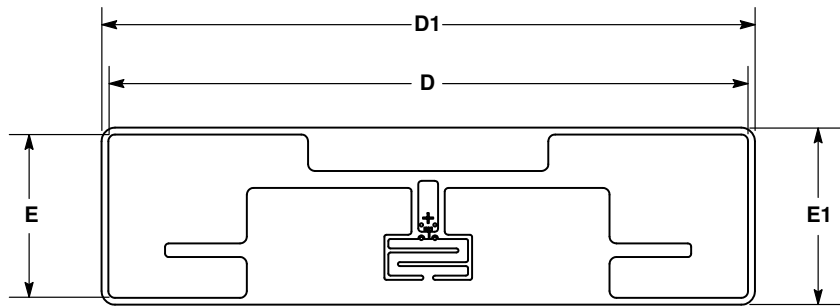

TOP VIEW

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.


DIM	MILLIMETERS	
	MIN	MAX
D	93.90	94.10
E	23.90	24.10
D1	95.50	96.50
E1	25.50	26.50



# SPSx Family

## PACKAGE DIMENSIONS

RF TAG 93x26.5mm  
CASE 888AF  
ISSUE O

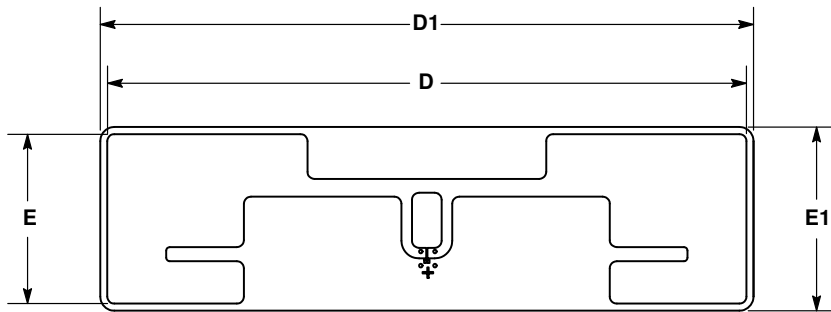


TOP VIEW

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS	
	MIN	MAX
D	90.40	90.60
E	23.90	24.10
D1	92.00	93.00
E1	25.50	26.50

RF TAG 93x26.5mm  
CASE 888AG  
ISSUE O

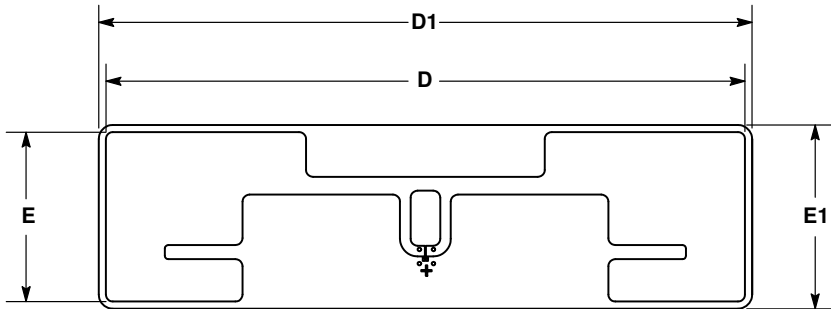

TOP VIEW

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS	
	MIN	MAX
D	90.40	90.60
E	23.90	24.10
D1	92.00	93.00
E1	25.50	26.50

# SPSx Family

## PACKAGE DIMENSIONS

**RF TAG 166.5x20mm**  
**CASE 888AH**  
**ISSUE O**

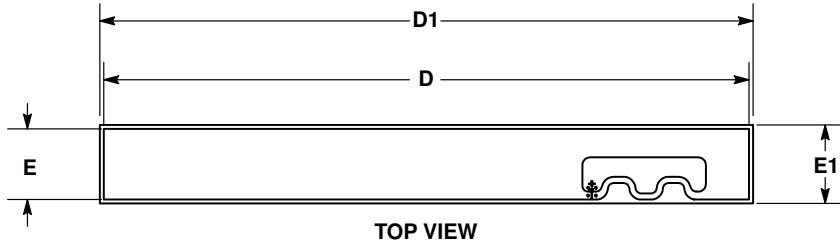


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS		
	MIN	NOM	MAX
D	165.40	165.50	165.60
E	17.90	18.00	18.10
D1	166.40	166.50	166.60
E1	19.90	20.00	20.10

**RF TAG 165x20mm**  
**CASE 888AJ**  
**ISSUE O**

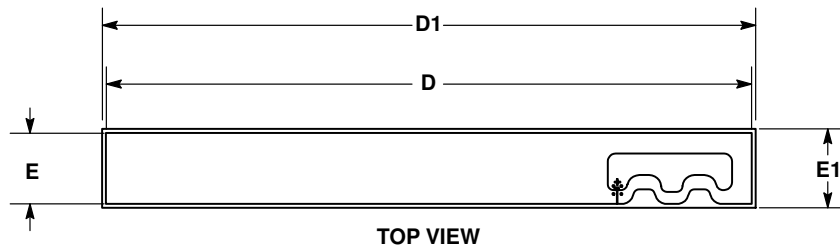


**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. ANTENNA SIZE DETERMINED BY DIMENSIONS D AND E.
4. LABEL SIZE DETERMINED BY DIMENSIONS D1 AND E1.
5. LABEL IS 0.076 THICK PET TAPE. ANTENNA IS 0.009 THICK ALUMINUM.

DIM	MILLIMETERS		
	MIN	NOM	MAX
D	163.60	163.70	163.80
E	17.90	18.00	18.10
D1	165.60	165.70	165.80
E1	19.90	20.00	20.10

MagnusS2 is a registered trademark of RFMicron, Inc.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**

Literature Distribution Center for ON Semiconductor  
 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
 USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
 Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
 Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative