



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SQF-ISD

## Industrial SD Card

# SQF-UDM

## Industrial USB Disk Module

NEW



RoHS COMPLIANT 2002/95/EC CE FCC

### Features

- SLC and MLC NAND Flash and wide range temperature support
- Compliant with SD system specification version 2.0 and 3.0
- Write protection feature using mechanical switch
- Shock resistance, anti-vibration and low power consumption

### Specifications

Connector Type	SD Card
Flash Type	SLC / MLC
Capacity	SLC: 1 to 32 GB MLC: 4 to 64 GB
Sustained R/W Performance (*)	SLC: up to 25/15 MB/sec MLC: up to 22/10 MB/sec
Operating Temperature	Commercial grade: 0 to +70° C Industrial grade: -40 to +85° C
Shock Resistance	1,500 G, Peak / 0.5 ms
Vibration Resistance	5 G, Peak / 10 ~ 2000 Hz
Endurance	> 2,000,000 program/erase cycles
Dimensions (mm)	32 (L) x 24 (W) x 2.1 (H)


(\*) These values are for reference only; they may change according to the flash memory used.

### Ordering Information

Part No.	Product Description
SQF-ISDS1-XG-86C	Advantech SQFlash SD Card C6 SLC 1/2 G (0 ~ 70° C)
SQF-ISDS1-XG-86E	Advantech SQFlash SD Card C6 SLC 1/2 G (-40 ~ 85° C)
SQF-ISDS1-XG-82C	Advantech SQFlash SD Card C10 SLC 4/8/16/32 G (0 ~ 70° C)
SQF-ISDS1-XG-82E	Advantech SQFlash SD Card C10 SLC 4/8/16/32 G (-40 ~ 85° C)
SQF-ISDM1-XG-82C	Advantech SQFlash SD Card C10 MLC 4/8/16/32/64 G (0 ~ 70° C)
SQF-ISDM1-XG-82E	Advantech SQFlash SD Card C10 MLC 4/8/16/32/64 G (-40 ~ 85° C)

Note: X stands for different capacities

NEW

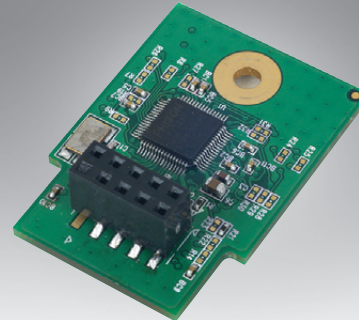

RoHS COMPLIANT 2002/95/EC CE FCC

### Features

- Compliant with standard USB specifications
- Built-in EDC/ECC up to 12 random bits error per 512 bytes
- Advanced wear-leveling and block management
- Shock resistance, anti-vibration and low power consumption

### Specifications

Connector Type	10-pin 2.54 mm pitch receptacle housing connector
Flash Type	SLC / MLC
Capacity	SLC: 1 to 32 GB MLC: 4 to 64 GB
DC Supply Voltage	5V (±10%)
Sustained R/W Performance (*)	SLC: up to 32/26 MB/sec MLC: up to 30/12 MB/sec
Operating Temperature	Commercial Grade: 0 to +70° C
Shock Resistance	2,500 G, Peak / 0.5 ms
Vibration Resistance	20 G, Peak / 80 ~ 2000 Hz
Endurance	> 5,000,000 program/erase cycles
Dimensions (mm)	26.5 x 37.8 x 10.6 (PCB Size)
Orientation	Horizontal

(\*) These values are for reference only; they may change according to the flash memory used.

### Ordering Information

Part No.	Product Description
SQF-UDMS1-1G-HDC	Advantech SQFlash USB DOM SLC 1 G, 1-CH (0 ~ 70° C)
SQF-UDMS1-1G-HDE	Advantech SQFlash USB DOM SLC 1 G, 1-CH (-40 ~ 85° C)
SQF-UDMS2-XG-HDC	Advantech SQFlash USB DOM SLC 2/4/8/16/32 G, 2-CH (0 ~ 70° C)
SQF-UDMS2-XG-HDE	Advantech SQFlash USB DOM SLC 2/4/8/16/32 G, 2-CH (-40 ~ 85° C)
SQF-UDMM1-4G-HDC	Advantech SQFlash USB DOM MLC 4 G, 1-CH (0 ~ 70° C)
SQF-UDMM1-4G-HDE	Advantech SQFlash USB DOM MLC 4 G, 1-CH (-40 ~ 85° C)
SQF-UDMM2-XG-HDC	Advantech SQFlash USB DOM MLC 8/16/32/64 G, 2-CH (0 ~ 70° C)
SQF-UDMM2-XG-HDE	Advantech SQFlash USB DOM MLC 8/16/32/64 G, 2-CH (-40 ~ 85° C)

Note: X stands for different capacities