imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 Fax: (818) 701-4939

Features

- Halogen free available upon request by adding suffix "-HF"
- Guard Ring Protection
- Low Power Loss for High Efficiency
- Lead Free Finish/RoHS Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Temperature: -50°C to +125°C
- Storage Temperature: -50°C to +125°C
- Maximum Thermal Resistance: 35°C/W Junction To Ambient

MCC catalog Number	Device Marking	Maximum Reccurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SR208	SR208	80V	56V	80V
SR2010	SR2010	100V	70V	100V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average forward current	I _{F(AV)}	2A	
Maximum surge current	I _{FSM}	50A	8.3ms, half sine,
Max peak forward voltage	V_{FM}		I _{FM} = 2.0A; T _J = 25°C*
		.85V	
Max peak reverse current	I _{RM}	1.0mA	V_{RRM} , $T_J = 25^{\circ}C$
Typical junction capacitance	CJ	170pF	V _R = 4.0V f = 1.0MHz

*Pulse test: Pulse width 300 µsec, Duty cycle 2%


Note: 1. High Temperature Solder Exemption Applied, see EU Directive Annex 7.

www.mccsemi.com

Revision: A

SR208 THRU SR2010

2 Amp Schottky Barrier Rectifier 80 to 100 Volts

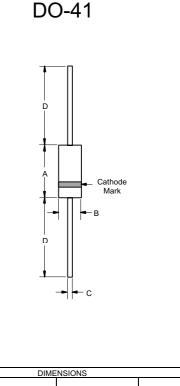

DIMENSIONS					
DIM	INCHES MIN MAX		MM MIN MAX		NOTE
Α	.166	.205	4.10	5.20	
В	.080	.107	2.00	2.70	
С	.028	.034	.70	.90	
D	1.000		25.40		

SR208 thru SR2010



Micro Commercial Components






Fig. 1-FORWARD CURRENT DERATING CURVE




PERCENT OF RATED PEAK REVERSE VOLTAGE, %

Fig. 3-TYPICAL REVERSE CHARACTERISTICS




INSTANTANEOUS FORWARD VOLTAGE, VOLTS

Fig. 2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



REVERSE VOLTAGE, VOLTS

Fig. 4-TYPICAL JUNCTION CAPACITANCE



NUMBER OF CYCLES AT 60Hz

Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

www.mccsemi.com



Ordering Information :

Device	Packing	
Part Number-TP	Tape&Reel: 5 Kpcs/Reel	
Part Number-AP	Ammo Packing: 5Kpcs/Ammo Box	
Part Number-BP	Bulk: 50 Kpcs/Carton	

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com