

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







MODEL:

SRCOOL7KRM

SmartRack® Rack-Mounted Air Conditioning Unit

















EIA/TIA Compliant

8U Rack Space

Close Coupled Cooling

Zero-Maintenance Design

Standard NEMA 5-15P Plug

Filters and Dehumidifies Air

Intuitive LCD Screen

Front View


- A Directional Vent
- B Cool Air Output
- C SRCOOLNET2 Slot
- Control Panel
- E Air Filter
- F Front Panel
- **G** Blocking Plate

Rear View

- H AC Power Cord
- Warm Air Exhaust
- Drainage Outlet


Control Panel

- **K** Numeric Display
- Operating Mode LEDs
- M Temperature Control Buttons
- N Fan Speed Mode LEDs
- "FAN SPEED" Button
- P "QUIET" Button
- "TIMER" Button
- R "FUNCTION" Button
- S "POWER" Button



FRONT VIEW

Note: Mount unit only at bottom of rack as shown.



CONTROL PANEL

- Saves valuable floor space in IT environments with 8U available rack space
- Saves energy with efficient close-coupled cooling, directing air upward to cool only the equipment inside the rack enclosure instead of the entire room
- 7,000 BTU of cooling power
- Built-in evaporator eliminates condensation—no floor drain or water collection tank needed
- Features remote control capability (requires optional SRCOOLNET2 Web Management Accessory, sold separately)


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Specifications	
Model	SRCOOL7K
Rack Spaces	8U
Cooling Capacity	7000 BTU / 2.0 kW
Input Voltage	120V, 60Hz AC
Power Consumption	1020W Max
Input Cord / Connector	7 ft., NEMA 5-15P
Unit Dimensions	13.9 x 17.35 x 22.52 in. / 353 x 441 x 572 mm
Shipping Dimensions	23.4 x 22.8 x 27.7 in. / 594 x 579 x 704 mm
Unit Weight	61.6 lb. / 28 kg
Shipping Weight	77.2 lb. / 35 kg
Standards	Tested to UL 484, CSA and RoHS standards

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

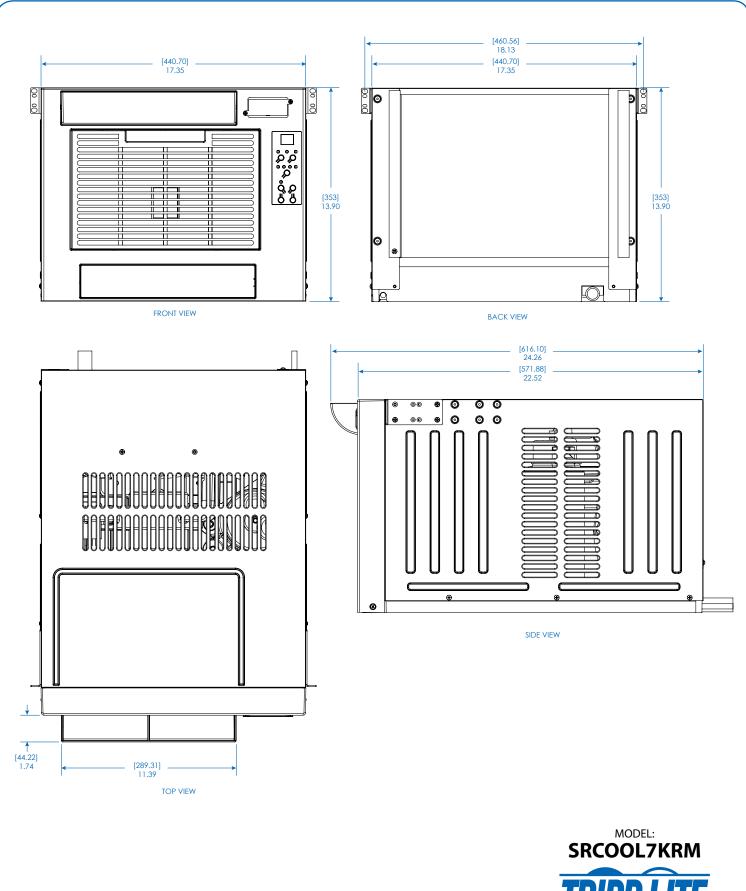

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com