



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.2V – 5.0V Output / 7A



BP06SRDB-07A

SRDB-07A Series

RoHS Compliant

- Nonisolated
- Compact, low profile surface mount package
- Fixed frequency
- High efficiency means less power dissipation
- Excellent thermal performance
- Optimized for cost
- Remote on/off
- Undervoltage lockout (UVLO)
- Over current and short circuit protection
- Remote sense



Description

The Bel SRDB-07A modules are a series of non-isolated, step down DC/DC power converters that operate from a nominal 12V source. These converters are available in a range of output voltages from 1.2V to 5.0V. They are packaged in a compact, low profile, surface mount DIP package for ease of layout and space savings. 7A maximum output is also provided. Standard features include remote on/off, over current and short circuit protection, UVLO and output voltage adjust. These products may be used almost anywhere low voltage silicon is employed and a 12V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

Applications

- Distributed power architectures
- Data networking equipment
- Telecommunications
- Computers and peripherals

Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number
5.0V	12V	7A	35.0W	92%	SRDB-07A500
3.3V	12V	7A	23.1W	90%	SRDB-07A330
2.5V	12V	7A	17.5W	88%	SRDB-07A250
1.8V	12V	7A	12.6W	83%	SRDB-07A180
1.5V	12V	7A	10.5W	82%	SRDB-07A150
1.2V	12V	7A	8.4W	81%	SRDB-07A120

©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

BP06SRDB-07A

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	Vin	-0.3		15	V
Output Enable Terminal Voltage	Vouten	-0.3		15.3	V
Ambient Temperature	Tamb	0		70	°C
Storage Temperature	Tstor	-40		100	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

Input Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Operating Input Voltage	All	Vin	10.8	12	13.2	V
Input Current	5.0V 3.3V 2.5V 1.8V 1.5V 1.2V	Iin			4.0 2.6 2.0 1.7 1.4 1.3	A
No Load Input Current	5.0V 3.3V 2.5V 1.8V 1.5V 1.2V			50 45 35 30 30 30	65 60 50 45 45 45	mA
Remote Off Input Current				1	4	mA
Input Reflected Ripple Current ¹	5.0V 3.3V 2.5V 1.8V 1.5V 1.2V			20 15 12 12 12 12	30 25 25 20 20 20	mA _{rms}
Input Reflected Ripple Current (P-P) ¹	5.0V 3.3V 2.5V 1.8V 1.5V 1.2V			70 50 45 35 35 35	120 100 100 60 60 60	mApk
I ² t Inrush Current Transient				0.08	0.16	A ² s
Turn On Voltage Threshold					10.4	V
Turn Off Voltage Threshold			8.2			V

Note: Input capacitance two 270µF/16V, ESR = 0.018 Ω max at 100kHz @ 25° C.

1. With simulated source impedance of 500nH, 5Hz to 20MHz.

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.2V – 5.0V Output / 7A



Output Specifications

BP06SRDB-07A

Parameter	Module	Symbol	Min	Typical	Max	Units
Output Voltage Set Point ¹	5.0V	Vout	4.900	5.00	5.100	V
	3.3V		3.247	3.30	3.353	
	2.5V		2.460	2.50	2.540	
	1.8V		1.771	1.80	1.829	
	1.5V		1.476	1.50	1.524	
	1.2V		1.181	1.20	1.219	
Load Regulation	5.0V			15	30	mV
	3.3V			10	16.5	
	2.5V			9	15	
	1.8V			9	15	
	1.5V			9	15	
	1.2V			9	15	
Line Regulation	All			3	10	mV
Regulation Over Temperature	5.0V				50	mV
	3.3V				33	
	2.5V				25	
	1.8V				18	
	1.5V				15	
	1.2V				12	
Total Output Voltage Regulation	5.0V				90	mV
	3.3V				59.5	
	2.5V				50	
	1.8V				43	
	1.5V				40	
	1.2V				37	
Output Ripple and Noise ²	5.0V			75	125	mVp-p
	3.3V			60	100	
	2.5V			60	100	
	1.8V			60	100	
	1.5V			60	100	
	1.2V			60	100	
Output Ripple and Noise ²	All			15	30	mVrms
Output Current Range	All	Iout	0		7	A
Output DC Current Limit	All	Ioutlim	9.1	12	16	A
Short Circuit Surge	5.0V	Ioutsurge		1.2	1.7	A ² s
	3.3V			1.0	1.5	
	2.5V			0.9	1.4	
	1.8V			0.7	1.2	
	1.5V			0.7	1.2	
	1.2V			0.6	1.1	
Turn on Time	5.0V	Ton		45	75	ms
	3.3V			30	50	
	2.5V			30	50	
	1.8V			30	50	
	1.5V			30	50	
	1.2V			30	50	
Overshoot at Turn On	All				3	%
Output Capacitance	All	Cout	0		3500	μF

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. Vin = 12V, Iout = full load, Ta = 25° C.

2. 0 - 20MHz, 0.1μF ceramic cap and 10μF aluminum cap on output.

©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

BP06SRDB-07A

Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Transient Response ³						
ΔV 50% to 100% of Max Load	5.0V			125	250	mV
Settling Time		Ts		25	50	μs
ΔV 100% to 50% of Max Load				125	250	mV
Settling Time		Ts		25	50	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	3.3V			100	165	mV
Settling Time		Ts		25	50	μs
ΔV 100% to 50% of Max Load				100	165	mV
Settling Time		Ts		25	50	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	2.5V			100	150	mV
Settling Time		Ts		25	50	μs
ΔV 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		25	50	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.8V			100	150	mV
Settling Time		Ts		30	70	μs
ΔV 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		30	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.5V			100	150	mV
Settling Time		Ts		30	70	μs
ΔV 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		30	70	μs
Transient Response ³						
ΔV 50% to 100% of Max Load	1.2V			110	150	mV
Settling Time		Ts		30	70	μs
ΔV 100% to 50% of Max Load				110	150	mV
Settling Time		Ts		30	70	μs

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

3. di/dt = 0.5A/1 μ S, Ta = 25° C with a 220 μ F Tantalum cap at output.

©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.2V – 5.0V Output / 7A



BP06SRDB-07A

General Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Efficiency ¹	5.0V	η	89	92		%
	3.3V		87	90		
	2.5V		85	88		
	1.8V		80	83		
	1.5V		79	82		
	1.2V		78	81		
Switching Frequency	5.0V	Fsw	285	355	425	kHz
	3.3V		280	330	380	
	2.5V		238	280	322	
	1.8V		180	210	240	
	1.5V		180	210	240	
	1.2V		180	210	240	
Output Voltage Trim Range ²	5.0V		90		110	%
	3.3V		70		110	
	2.5V		70		110	
	1.8V		90		120	
	1.5V		90		120	
	1.2V		90		110	
Remote Sense Compensation	All				10	%
Weight	All			10.8		g

1. Vin=12V, full load and Ta=25° C.

2. See graphs on pages 10-13.

Control Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Remote On/Off ³	All	Vouten				V
Signal Low (Unit Off)	All		0		1	V
Signal High (Unit On)	All		2.5		13.2	V







3. With remote on/off pin 8 open, the module is on.

Note: On/off pin designed to work with an open collector/drain switch.

©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

BP06SRDB-07A

Efficiency Data

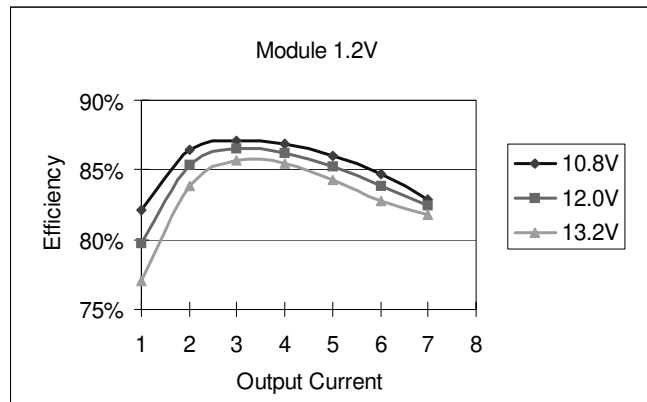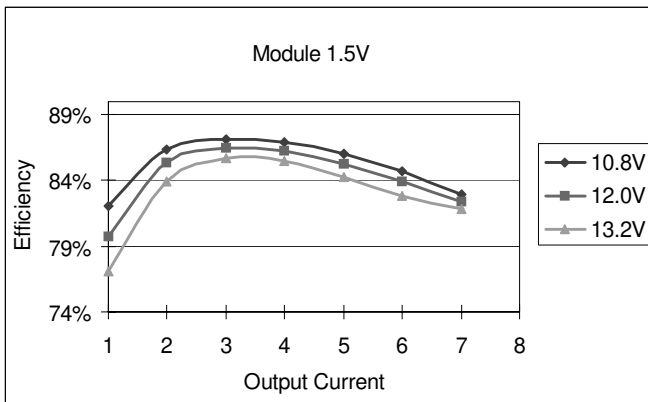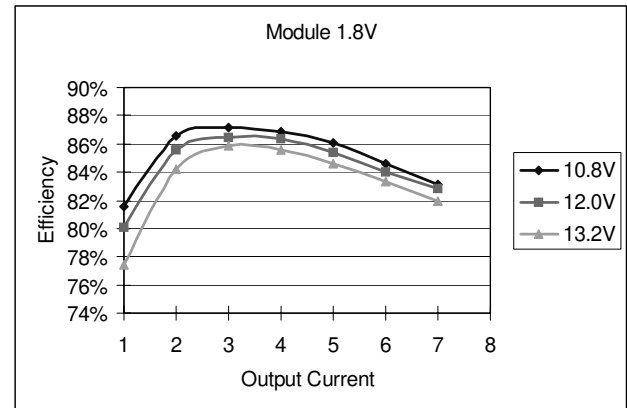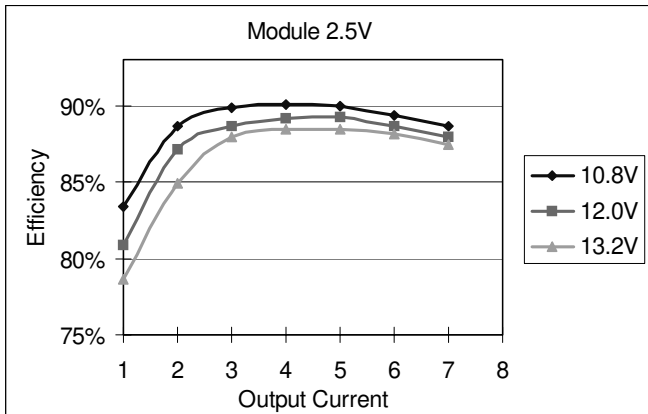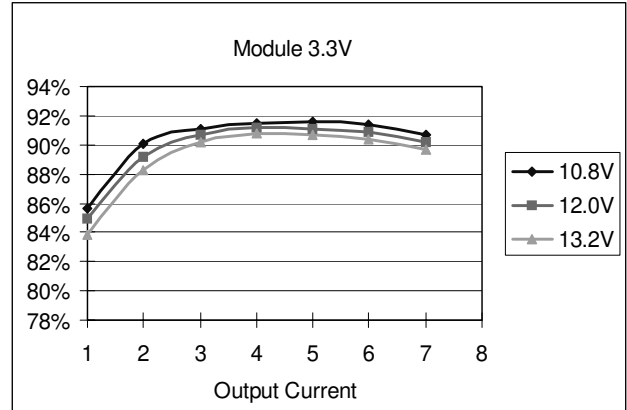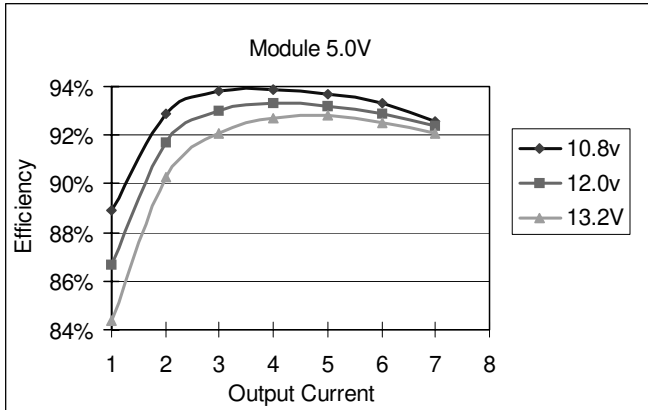

NON-ISOLATED DC/DC CONVERTERS


12V Input / 1.2V – 5.0V Output / 7A




BP06SRDB-07A

Ripple and Noise


0.1 μ F ceramic cap and 10 μ F aluminum electrolytic cap added at the output.

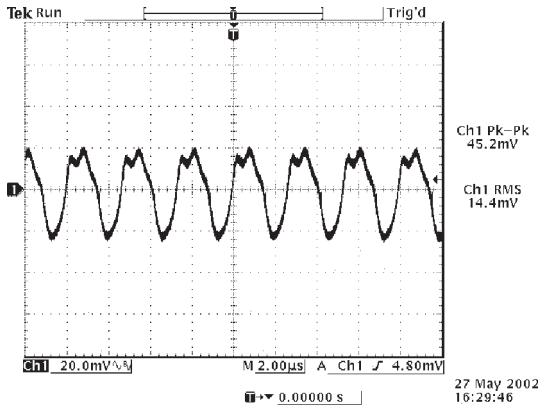


Ripple and noise at full load and 12Vdc input, 5.0Vdc output and Ta=25° C

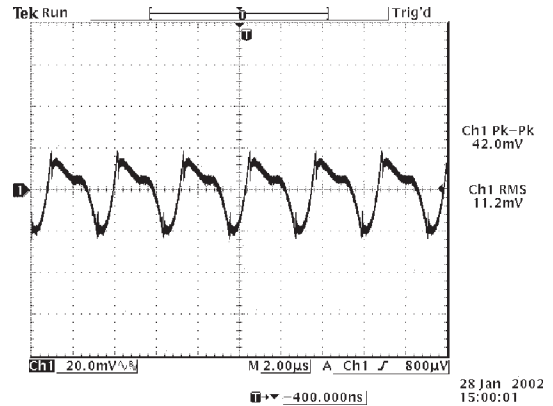


Ripple and noise at full load and 12Vdc input, 3.3Vdc output and Ta=25° C

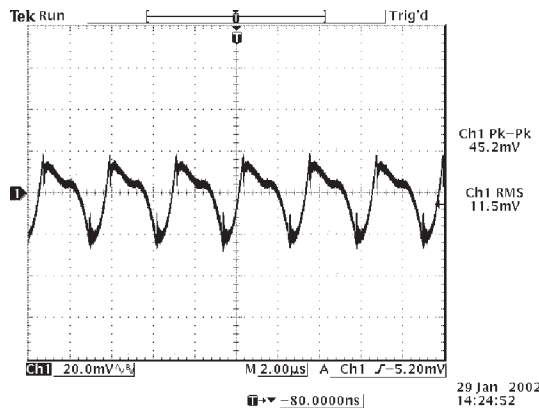


Ripple and noise at full load and 12Vdc input, 2.5Vdc output and Ta=25° C

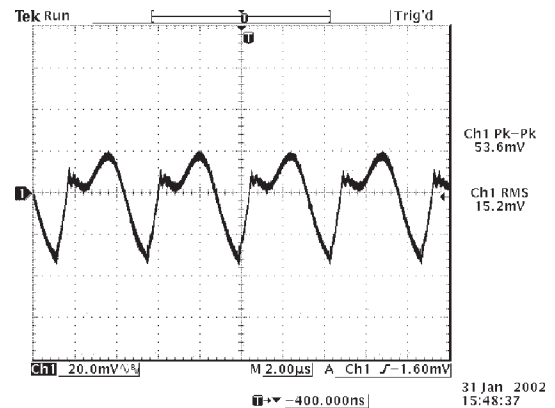

Ripple and noise at full load and 12Vdc input, 1.8Vdc output and Ta=25° C

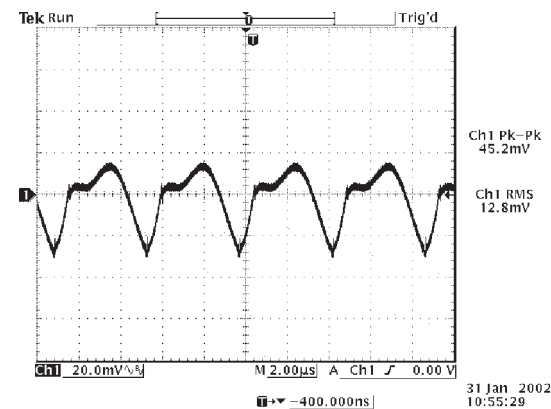

Ripple and noise at full load and 12Vdc input, 1.5Vdc output and Ta=25° C

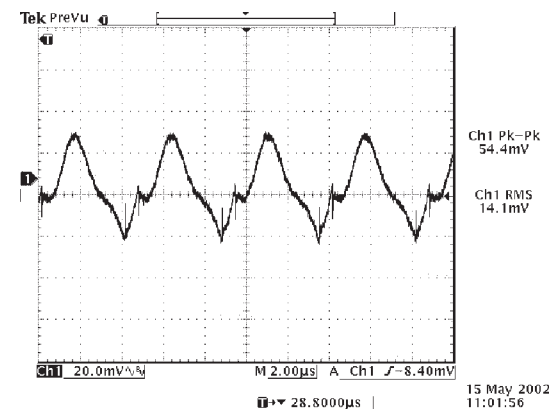


Ripple and noise at full load and 12Vdc input, 1.2Vdc output and Ta=25° C


BP06SRDB-07A

Transient Response


Transient response: $di/dt = 0.5A/\mu S$, external load capacitance $C_o=220\mu F$ aluminum cap at output

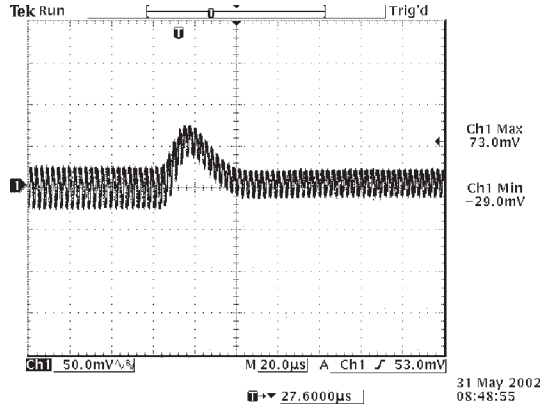


Vout=5.0V
50% to 100% load transients at 12V input and Ta=25° C

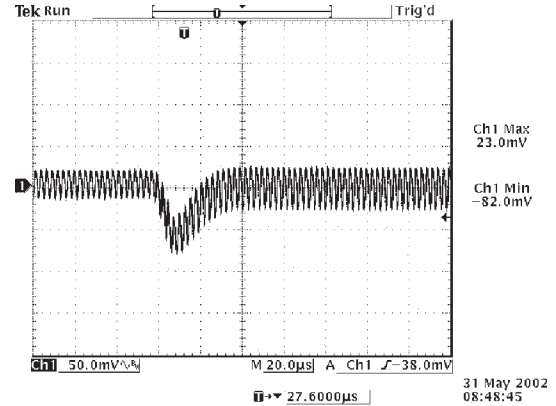


Vout=5.0V
100% to 50% load transients at 12V input and Ta=25° C

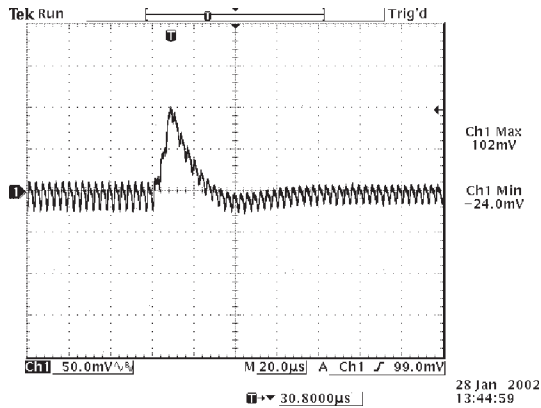


Vout=3.3V
50% to 100% load transients at 12V input and Ta=25° C

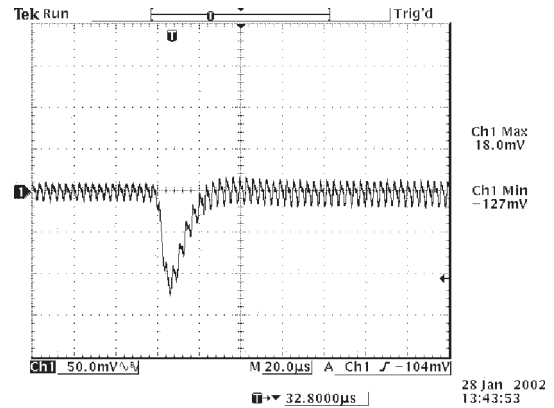

Vout=3.3V
100% to 50% load transients at 12V input and Ta=25° C

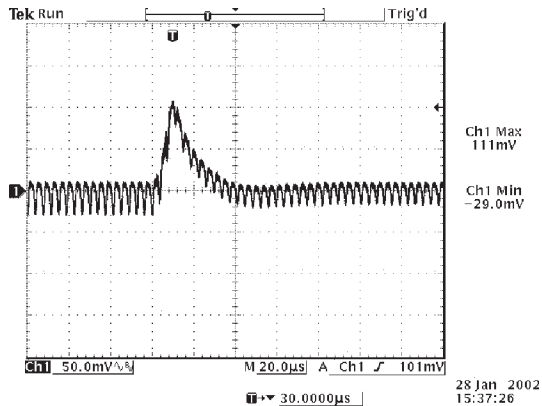

Vout=2.5V
50% to 100% load transients at 12V input and Ta=25° C

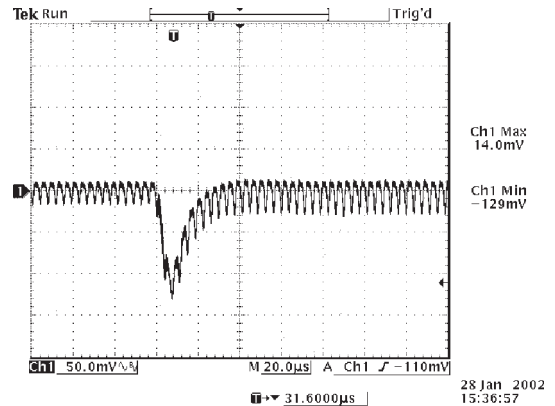

Vout=2.5V
100% to 50% load transients at 12V input and Ta=25° C

NON-ISOLATED DC/DC CONVERTERS


12V Input / 1.2V – 5.0V Output / 7A




BP06SRDB-07A

Transient Response


Transient response: $di/dt = 0.5A/\mu S$, external load capacitance $C_o=470\mu F$ (Tantalum capacitor)

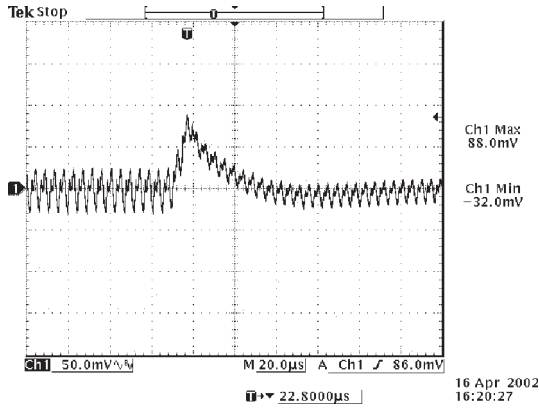


Vout=1.8V
50% to 100% load transients at 12V input and $T_a=25^\circ C$

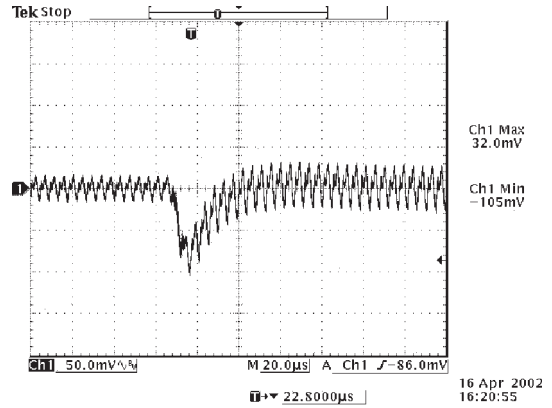


Vout=1.8V
100% to 50% load transients at 12V input and $T_a=25^\circ C$

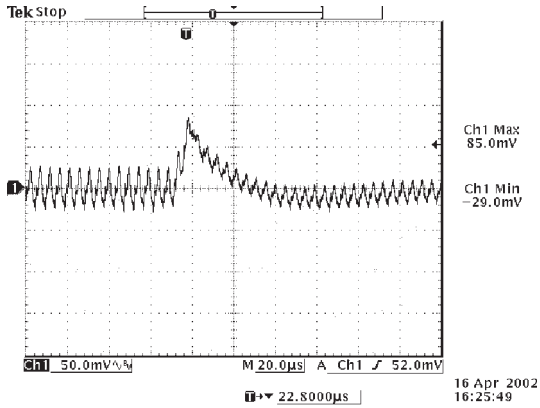


Vout=1.5V
50% to 100% load transients at 12V input and $T_a=25^\circ C$

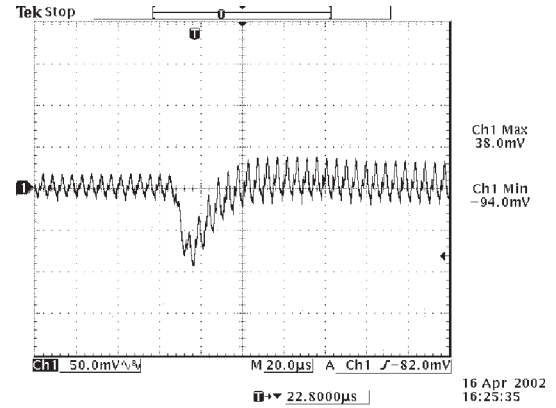

Vout=1.5V
100% to 50% load transients at 12V input and $T_a=25^\circ C$

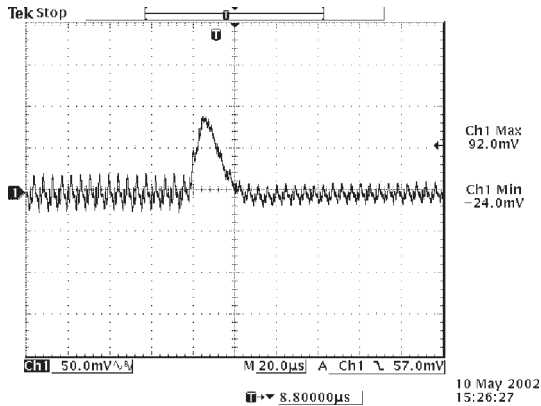

Vout=1.2V
50% to 100% load transients at 12V input and $T_a=25^\circ C$

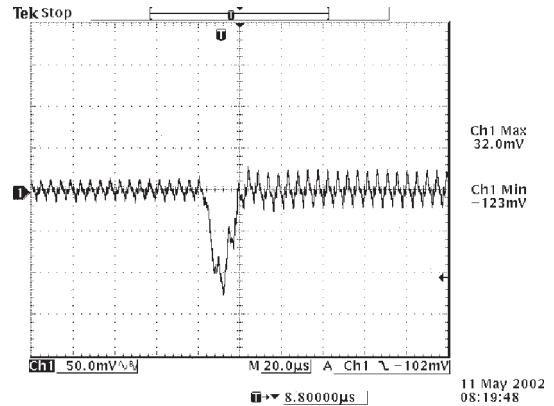


Vout=1.2V
100% to 50% load transients at 12V input and $T_a=25^\circ C$


©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

BP06SRDB-07A

Thermal Considerations

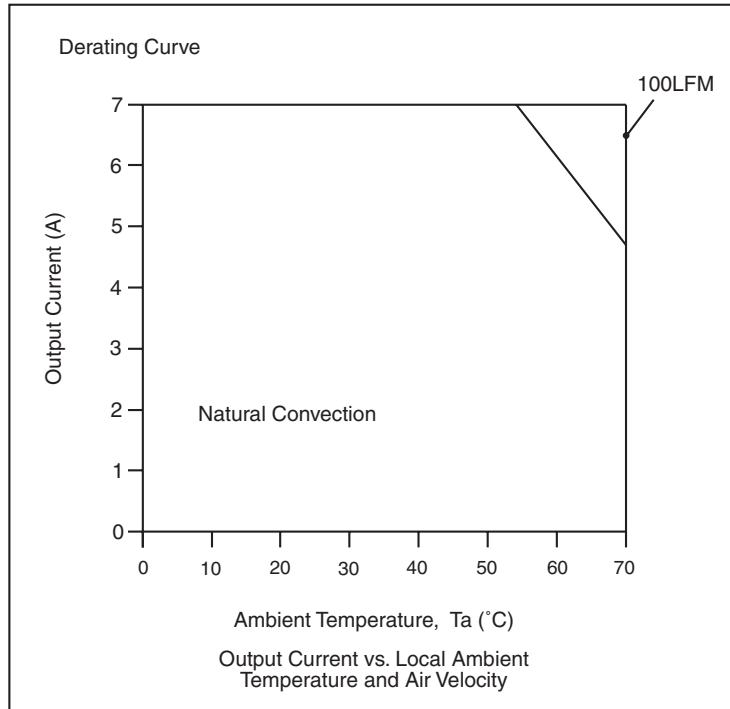

Output Voltage Set-Point Adjustment

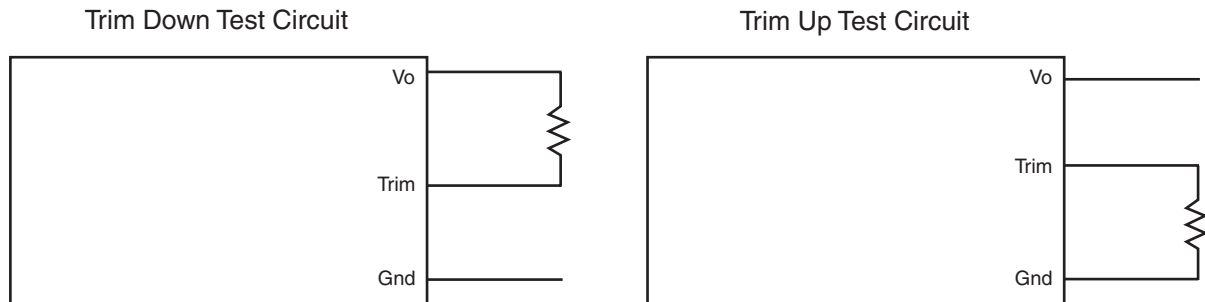

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.2V – 5.0V Output / 7A





BP06SRDB-07A

Output Voltage Set-Point Adjustment

SRDB-07A500 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{10.52}{V_o - V_{o, \text{adj}}} - 4.55 \right) \text{ Kohm}$$

$$R_{\text{trim up}} = \left(\frac{2}{V_{o, \text{adj}} - V_o} - 2.05 \right) \text{ Kohm}$$

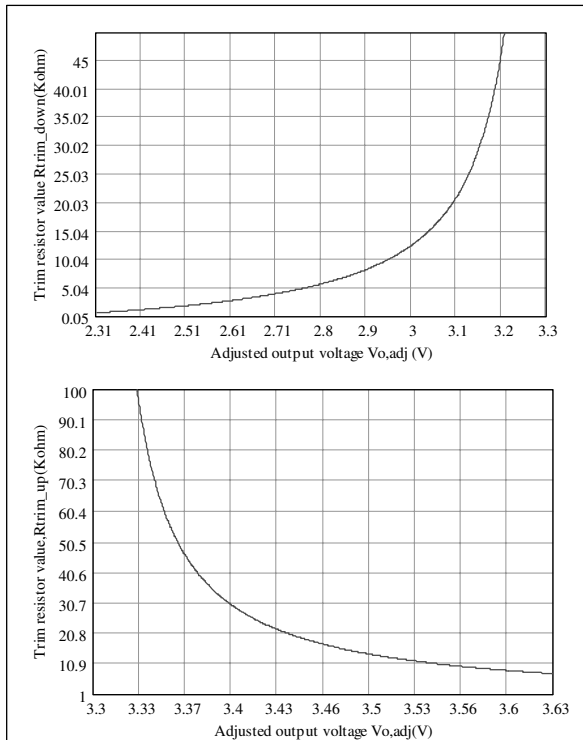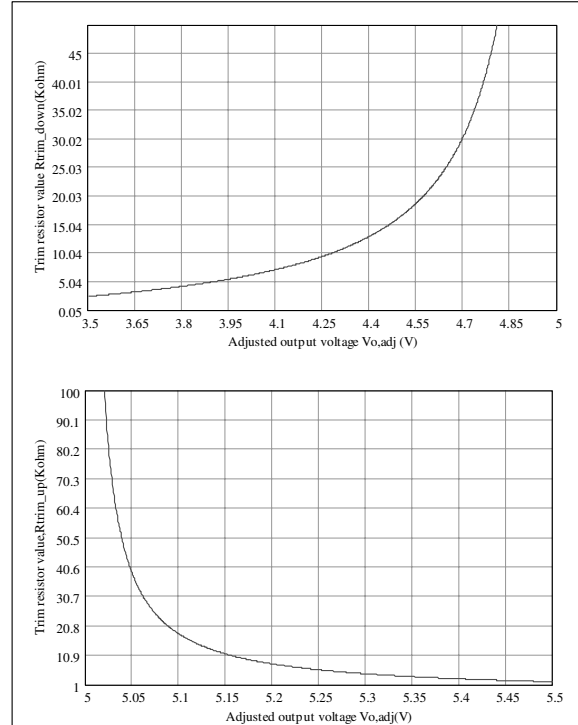

SRDB-07A330 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{5.08}{V_o - V_{o, \text{adj}}} - 4.55 \right) \text{ Kohm}$$

$$R_{\text{trim up}} = \left(\frac{3.175}{V_{o, \text{adj}} - V_o} - 2.05 \right) \text{ Kohm}$$



BP06SRDB-07A

Output Voltage Set-Point Adjustment

SRDB-07A250 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{3.926}{V_o - V_{o, \text{adj}}} - 4.64 \right) \text{ Kohm}$$

$$R_{\text{trim up}} = \left(\frac{4.02}{V_{o, \text{adj}} - V_o} - 1.47 \right) \text{ Kohm}$$

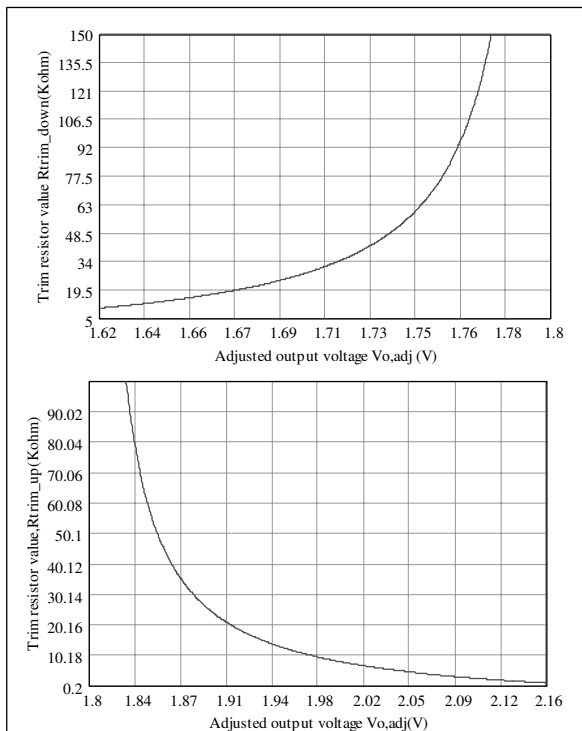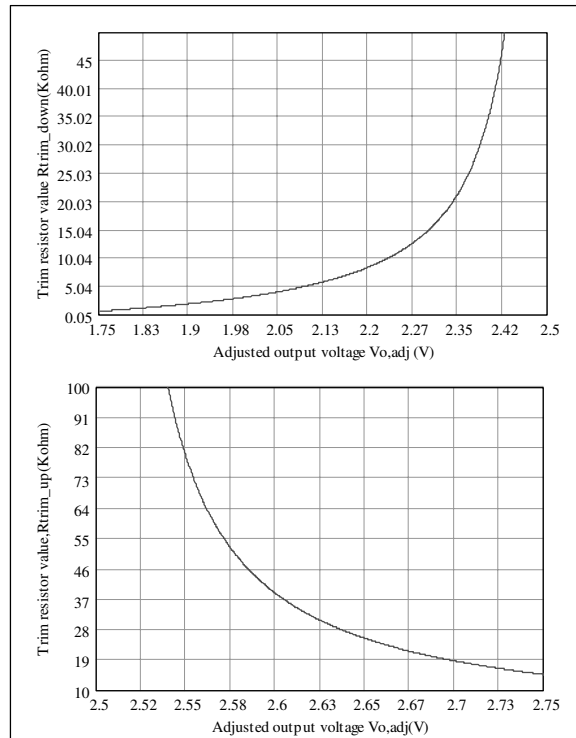

SRDB-07A180 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{3.869}{V_o - V_{o, \text{adj}}} - 11.34 \right) \text{ Kohm}$$

$$R_{\text{trim up}} = \left(\frac{3.072}{V_{o, \text{adj}} - V_o} - 7.5 \right) \text{ Kohm}$$

NON-ISOLATED DC/DC CONVERTERS

12V Input / 1.2V – 5.0V Output / 7A





BP06SRDB-07A

Output Voltage Set-Point Adjustment

SRDB-07A150 Trim Resistor Calculation

$$R_{\text{trim down}} = \left(\frac{2.704}{V_o - V_{o, \text{adj}}} - 11.34 \right) \text{ Kohm}$$

$$R_{\text{trim up}} = \left(\frac{3.072}{V_{o, \text{adj}} - V_o} - 7.5 \right) \text{ Kohm}$$

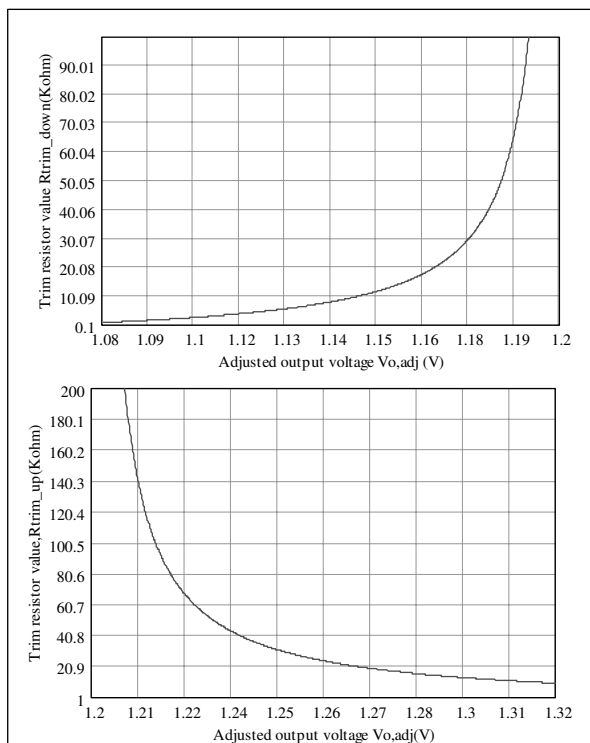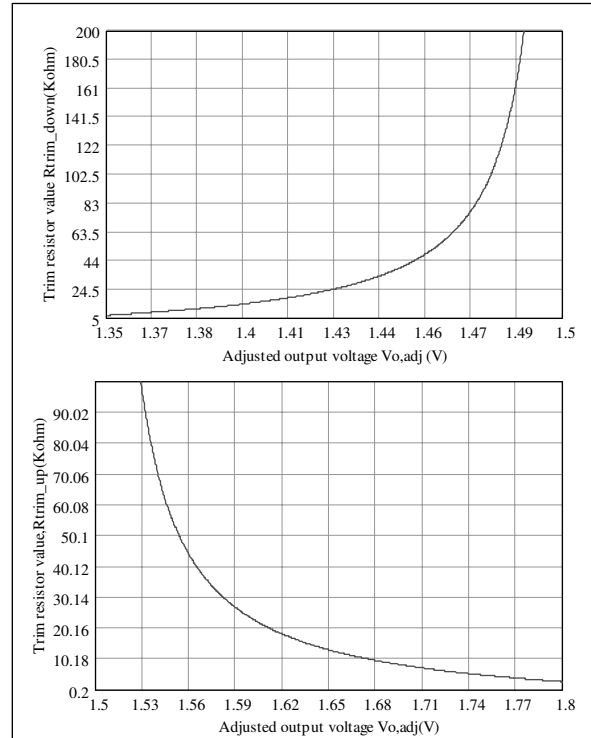

SRDB-07A120 Trim Resistor Calculation


$$R_{\text{trim down}} = \left(\frac{0.874}{V_o - V_{o, \text{adj}}} - 6.58 \right) \text{ Kohm}$$

$$R_{\text{trim up}} = \left(\frac{1.728}{V_{o, \text{adj}} - V_o} - 4.42 \right) \text{ Kohm}$$

©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

BP06SRDB-07A


Mechanical

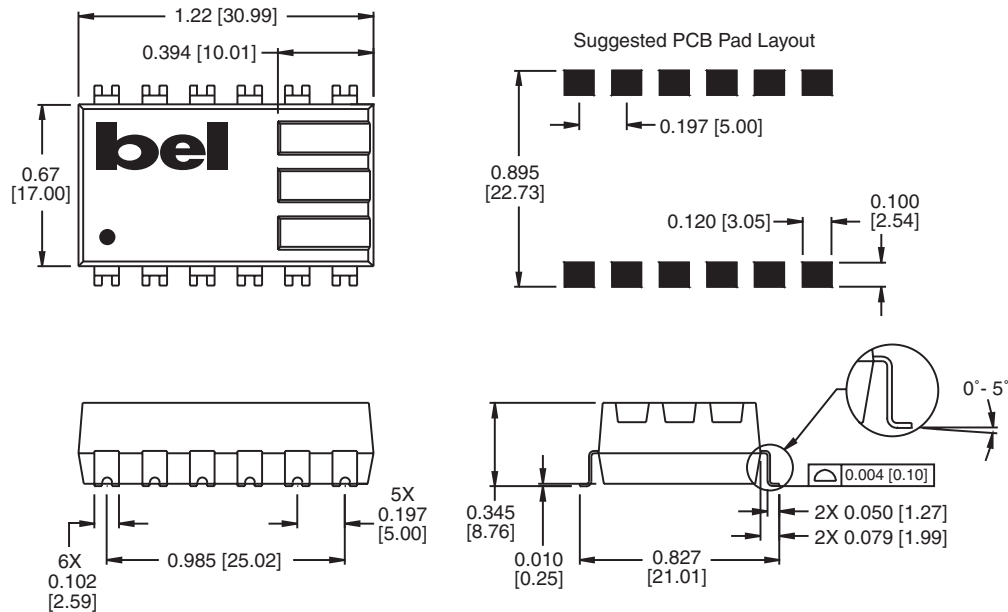

Dimensions are in inches [millimeters].

Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

Pin	Function
1	Ground
2	Ground
3	Ground
4	Ground
5	+Vin
6	+Vin
7	Trim
8	Remote On/Off
9	Remote Sense (+)
10	+Vo
11	+Vo
12	+Vo



RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240°C.



©2006 Bel Fuse Inc. Specifications subject to change without notice. 02.06

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com