



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NXP-Freescale i.MX6

# MicroSoM i2

Dual Core SoM (System-On-Module)



Simple. Robust. Computing Solutions

**SolidRun Ltd.**

3 Dolev st., 3rd floor, P.O. Box 75  
Migdal Tefen 2495900, Israel.

[www.solid-run.com](http://www.solid-run.com)

## Overview

Expands the capabilities of the single core SOM-i1 with a dual lite CPU and 1GByte of DRAM.

### **MicroSoM i2 Highlighted Features:**

- Based on NXP's iMX6 Dual-lite Core SoC
- 1GB DDR3
- Small size 47mm×30mm
- Variety of temperature grades:
  - Commercial 0°C...60°C
  - Extended -20°C...70°C
  - Industrial -40°C...85°C
  - Automotive -40°C...105°C
- Long longevity of 10 years
- Low power consumption

## System Specifications


i.MX6 Dual-lite	
<b>Processor core</b>	Dual core ARM A9
<b>Processor speed</b>	1GHz (up to 1.2GHz)
<b>Floating Point</b>	VFPv3
<b>SIMD</b>	NEON
<b>Graphics Processing Unit</b>	Vivante GC880
<b>3D GPU Support</b>	OpenGL ES 1.1/2.0
<b>HW Video Dec/Enc</b>	Multi Format
<b>Memory</b>	64 bit, 1GB DDR3 @ 800Mbps
<b>Wired Network</b>	10/100/1000 Mbps*
<b>Wireless Network</b>	Optional
<b>Bluetooth</b>	Optional
<b>Display Max resolution</b>	HDMI: 1080p, LCD: WUXGA (1920×1200)
<b>Display Interfaces</b>	LVDS, HDMI 1.4, DSI, Parallel
<b>Dual display support</b>	✓
<b>Supported External Storage</b>	NOR-Flash, eMMC, SD/microSD, PCIeSSD
<b>SD/MMC</b>	3
<b>USB 2.0 host</b>	1
<b>USB OTG</b>	1
<b>Serial ports</b>	3
<b>Digital audio serial interface</b>	1
<b>Camera interface port</b>	2 Lane CSI
<b>CAN bus</b>	✓**
<b>S-ATA</b>	–
<b>PCI-Express 2.0</b>	×1
<b>Second Ethernet</b>	Via PCIe or USB NIC
<b>I2C</b>	3
<b>SPI</b>	3
<b>PWM</b>	4

i.MX6 Dual-lite	
<b>GPIO</b>	75
<b>JTAG</b>	Test Point Header
<b>S/PDIF Input</b>	✓
<b>S/PDIF Output</b>	✓
<b>1-Wire</b>	1-Wire Transceiver on carrier board
<b>Main Voltage</b>	5V
<b>IO Voltage</b>	3.3V
<b>SoM interface</b>	Hirose DF40 connectors 1.5mm up to 4.0mm mating height
<b>Dimensions (W×L)</b>	47mm×30mm

(\*) Note that due to internal i.MX6 buses the 1000Mbps interface speed is limited to 470Mbps.

(\*\*) Will be supported on MicroSoM v1.4.

## Block Diagram

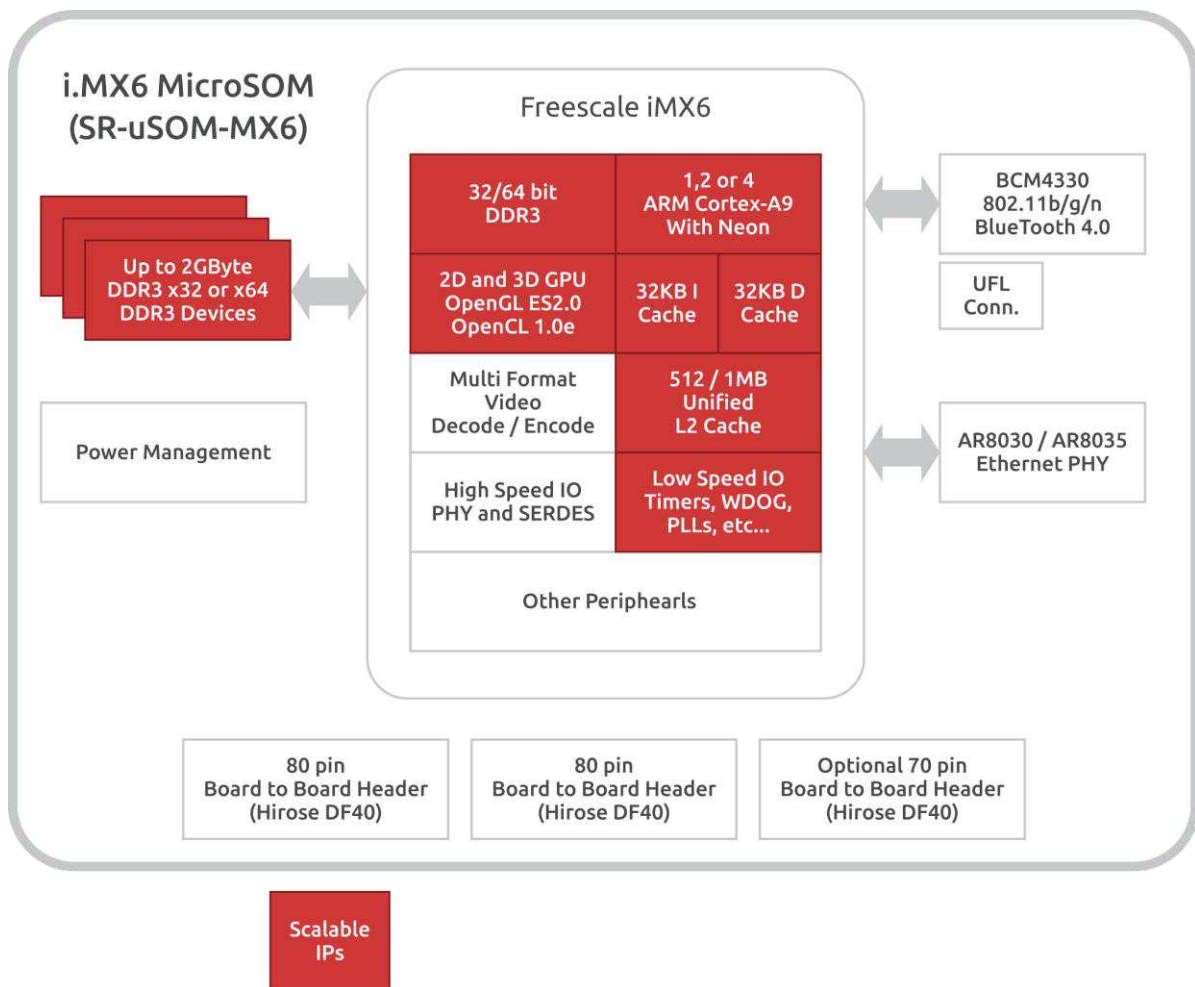

## Ordering Information

SKU Format
usomxyz-3c

## Legend

	Meaning	Options	Description
<b>usom</b>	Product Family	none	Fixed parameter- MicroSoM Family
<b>xx</b>	MicroSoM Type	01	MicroSoM i1
		02	MicroSoM i2
		03	MicroSoM i2eX
		04	MicroSoM i4P
		05	MicroSoM i4x4
<b>y</b>	Temperature Range	none	Commercial Temperature Range
		e	Extended Temperature Range
		i	Industrial Temperature Range
		a	Automotive Temperature Range
<b>z</b>	WiFi/BT	none	No WiFi/BT
		w	Include WiFi/BT
<b>3c</b>	3 Board to Board Connectors	None	Fixed parameter

## Available SKUs for MicroSoM i2

SKU	Description
<b>usom02-3c</b>	MicroSoM i2
<b>usom02w-3c</b>	MicroSoM i2 + WiFi/BT
<b>usom02e-3c</b>	MicroSom i2- Extended Temperature
<b>usom02ew-3c</b>	MicroSom i2- Extended Temperature + WiFi/BT
<b>usom02i-3c</b>	MicroSom i2- Industrial Temperature
<b>usom02iw-3c</b>	MicroSom i2- Industrial Temperature + WiFi/BT
<b>usom02a-3c</b>	MicroSom i2- Automotive Temperature
<b>usom02aw-3c</b>	MicroSom i2- Automotive Temperature + WiFi/BT

## Safety notice

- a. This device is to be used with Certified Power adaptor with output rated 5VDC, 3A. Power adapter must meet Limited power source (LPS) requirements.
- b. Power adapter must meet local safety standards and requirements based on product intended use.
- c. Power adapter must meet Operating environment conditions as specified above.

## Disposal

Follow local regulations regarding disposal of the product. Dispose of your product in accordance with local regulations. In some areas, the disposal of these items in household or business trash may be prohibited.

Help us protect the environment- recycle!

## IMPORTANT NOTICE – Please Read Carefully

No warranty of accuracy is given concerning the contents of the information contained in this document. To the extent permitted by law no liability (including liability to any person by reason of negligence) will be accepted by SolidRun Ltd. Or its employees for any direct or indirect loss or damage caused by omissions from or inaccuracies in this document.

SolidRun Ltd. Reserves the right to change details in this publication without notice

Product and company names herein may be the trademarks of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

## Support

For technical support please visit:

Our Wiki – <http://wiki.solid-run.com/>

Our Forums - <http://forum.solid-run.com/>

For direct support please contact us at: [support@solid-run.com](mailto:support@solid-run.com)