



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Tyco / Electronics**  
**Raychem Circuit Protection**  
 308 Constitution Drive  
 Menlo Park, CA 94025-1164  
 Phone: 800-227-4856  
 Fax: 800-227-4866

**PolySwitch®**  
**PTC Devices**  
 Overcurrent Protection Device

**PRODUCT: SRP420**

DOCUMENT: SCD 21792  
 PCN: 609666  
 REV LETTER: G  
 REV DATE: JULY 25, 2002  
 PAGE NO.: 1 OF 1

**Specification Status: RELEASED**

**Electrical Rating**

**Voltage: 30V MAX**  
**Current: 100A MAX**

**Leads:**


Nickel: 0.125 mm Nominal Thickness

**Tape:**

Polyester

**Marking:**

- Manufacturer's Mark
- XX 420 — Part Identification
- — Lot Identification

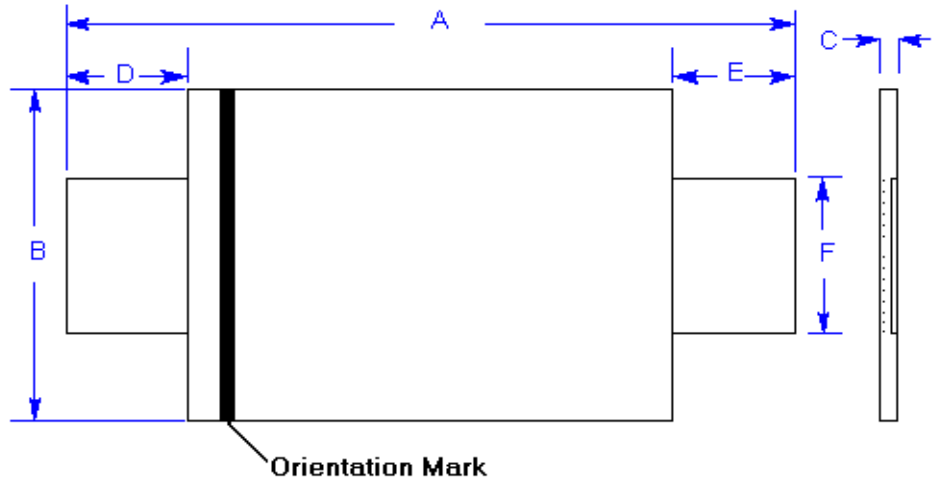

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	30.6	32.4	12.9	13.6	0.5	1.1	5.0	7.5	5.0	7.5	6.0	6.7
in*:	(1.20)	(1.28)	(0.51)	(0.54)	(0.02)	(0.04)	(0.20)	(0.30)	(0.20)	(0.30)	(0.24)	(0.26)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS:**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION		
	AMPS 20°C HOLD		AMPS AT 0°C HOLD   TRIP		AMPS AT 20°C HOLD   TRIP		AMPS AT 60°C HOLD   TRIP		AMPS AT 80°C HOLD   TRIP		SECONDS AT 20°C, 20 A TYP   MAX		OHMS AT 20°C MIN   MAX		OHMS AT 20°C MIN   MAX		WATTS AT 20°C, 15V TYP   MAX
4.2	5.1	9.5	4.2	7.6	3.0	5.5	--	--	2.6	6.0	0.012	0.024	0.012	0.040	2.2	2.9	

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.