



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- Features :
 - 1000VDC I/O isolation
 - Internal SMD technology
 - Built-in EMI filter
 - Cooling by free air convection
 - Non-conductive plastic case
 - Dual in line package
 - 100% burn-in test
 - Low cost / High reliability
 - Approvals: FCC / CE
 - 2 years warranty




SELECTION GUIDE

ORDER NO.	SRS-0505	SRS-1205	SRS-2405	SRS-4805	SRS-0509	SRS-1209	SRS-2409	SRS-4809	
OUTPUT	DC VOLTAGE	5V				9V			
	CURRENT RANGE	0 ~ 100mA				0 ~ 56mA			
	EFFICIENCY (TYP.)	60%				60%			
ORDER NO.	SRS-0512	SRS-1212	SRS-2412	SRS-4812	SRS-0515	SRS-1215	SRS-2415	SRS-4815	
OUTPUT	DC VOLTAGE	12V				15V			
	CURRENT RANGE	0 ~ 42mA				0 ~ 34mA			
	EFFICIENCY (TYP.)	60%				60%			

SPECIFICATION

OUTPUT	RATED POWER	0.5W								
	RIPPLE & NOISE (max.) Note.2	100mVp-p								
	LINE REGULATION	±1.0%								
	LOAD REGULATION Note.3	±1.0%								
	VOLTAGE ACCURACY	±2.0%(Typ.)				±3.0%(max.)				
	SWITCHING FREQUENCY	50KHz min.								
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	4.5 ~ 5.5V	10.8 ~ 13.2V	21.6 ~ 26.4V	43.2 ~ 52.8V	
	NORMAL VOLTAGE	5V	12V	24V	48V	5V	12V	24V	48V	
	INPUT CURRENT	Full load	175mA	72mA	36mA	19mA	175mA	72mA	36mA	19mA
		No load	37mA	15mA	9mA	5mA	37mA	15mA	9mA	5mA
	FILTER	Capacitor type								
PROTECTION	Fuse recommended									
PROTECTION (Note. 4)	OVERLOAD	150 ~ 350% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed								
ENVIRONMENT	WORKING TEMP.	-25 ~ +71°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20% ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03% / °C(0 ~ 50°C)								
	VIBRATION	10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes								
SAFETY & EMC	SAFETY STANDARDS	EAC TP TC 004 approved								
	WITHSTAND VOLTAGE	I/P-O/P:1KVDC								
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH								
	ISOLATION CAPACITANCE	80pF max.								
	EMC EMISSION	Compliance to EN55032 Class B, FCC part 15 Class B, EAC TP TC 020								
OTHERS	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A, EAC TP TC 020								
	MTBF	600khrs min. MIL-HDBK-217F(25°C)								
	DIMENSION	22.6*9.9*8.4mm or 0.89**0.39**0.33" inch (L*W*H)								
WEIGHT	3.1g									


■ Mechanical Specification

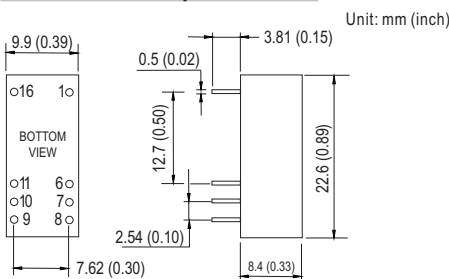

■ Pin Configuration

Pin No.	Output
1 & 16	+Vin
6 & 11	-Vout
7 & 10	+Vout
8 & 9	-Vin

■ Derating Curve

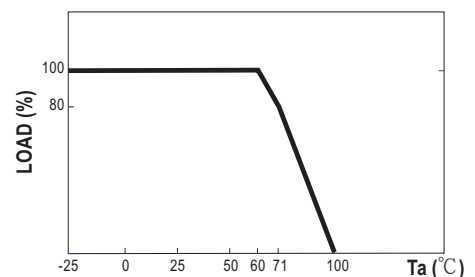

NOTE

- All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- Load regulation is measured from 10% to 100% rated load.
- Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.