

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









| | DRAWING | NUMBER | |
|-----|---------|--------|-----|
| SSL | -LX5 | 09F3 | SYD |

REV



REV

REVISIONS

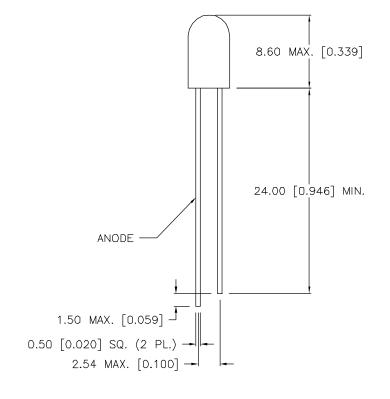

DATE

ELECTRO-OPTICAL CHARACTERISTICS $T_A = 25$ °C $I_f = 20$ mA

| PARAMETER | MIN | TYP | MAX | UNITS | TEST COND |
|---|-------------------------|-----|-----|-----------------------------------|---|
| PEAK WAVELENGTH FORWARD VOLTAGE REVERSE VOLTAGE AXIAL INTENSITY VIEWING ANGLE EMITTED COLOR EPOXY LENS FINISH | 5.0 YELLOW YELLOW | | 2.8 | nm Vf Vr mcd 2x theta | I _r = 100 uA I _f = 20 mA |

LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER | MAX | UNITS |
|---|--|---|
| PEAK FORWARD CURRENT* STEADY CURRENT POWER DISSIPATION DERATE FROM 25°C OPERATING, STORAGE TEMP LEAD SOLDERING TEMP 2.0mm FROM BODY | 150 30 125 -1.2 -40 TO +85 +260 | mA mA mW mW/*C *C *C 3 SEC. MAX |

^{*} t<10uS

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



292 E. HELLEN ROAD PALATINE, ILLINDIS 60067 (708) 359-2790

REV

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC.
EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF
THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT
SAME IN WHOLE DR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

CHK'D: APPD: DWN: DATE: 6-24-96 SCALE: N/A

T-5 (T-1 3/4) FLANGELESS LED SUPER YELLOW, DIFFUSED LENS

DRAWING NUMBER PAGE 1 OF 1 SSL-LX509F3SYD