



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SSP3-277 Series

3-Point LED Driver Surge Protector
with 20,000 Amp Max Protection, Line-Neutral

Intelligent Device
ECOSYSTEM
classic

Features

SSP3-277 surge protectors are designed for use in conjunction with LED Drivers to provide an additional level of cost-effective protection against powerline disturbances in industrial and commercial applications.


- 3-leaded device that protects all single phase coupling modes (Line-Neutral, Line-Ground & Neutral-Ground) in accordance with IEEE/ANSI C62.41-2002 select guidelines
- Protects against surges and transients per ANSI C62.41-2002 category C low (6KV, 1.2/50 μ S & 3KA, 8/20 μ S) standard Combo waves and (6KV, 100KHz) Ring wave
- Protects against surges and transients per new ANSI C82.77-5 2015 category C medium (10KV, 1.2/50 μ S & 5KA, 8/20 μ S) standard Combo waves and (6KV, 100KHz) Ring wave
- Basic Protection on Line-Ground (L-G) & Neutral-Ground (N-G) connections of 12,000 Amps (Max)
- Enhanced Surge Rating on Line-Neutral (L-N) connections of 20,000 Amps (Max) to protect against switching transients found in commercial electrical systems.
- Designated UL 1449 Type 5 Recognized Component in the United States and Canada
- Passes UL1449 Nominal Discharge Current rating of 5,000 Amps in all coupling modes
- At end-of-life, individual surge protection elements will be in short circuit mode for one or more coupling modes
- Maximum surface temperature rated at 90°C
- Operating temperature: -35°C to 85°C (ambient)
- 277V Model: Protection for LED drivers capable of operating at 277V input voltage or with universal input range of 120V through 277V. Not optimized for use with single voltage devices operating at 120V-only or 240V-only.



Model	AC Mains Voltage	Max Continuous Operating Voltage		Nom Discharge Current I_n (kA)	Measured Limiting Voltage MLV (V)	Max Clamping Voltage 8/20 μ S @ 20kA	Max Clamping Voltage 8/20 μ S @ 12kA	
		AC	DC			Line-Neutral	Line-Ground	Neutral-Ground
SSP3-277	277V	320V	420V	5kA	1140 L-N 1290 L-G, N-G	2600V	1800V	

Line-Ground Neutral-Ground		Line-Neutral	
Pulse rating (8 x 20 μ Sec)		Pulse rating (8 x 20 μ Sec)	
Strikes	Surge	Strikes	Surge
1	12,000 A	1	20,000 A
2	8,000 A	2	15,000 A
100	3,000 A	15	10,000 A
1600	750 A	100	3,000 A

Dimensions

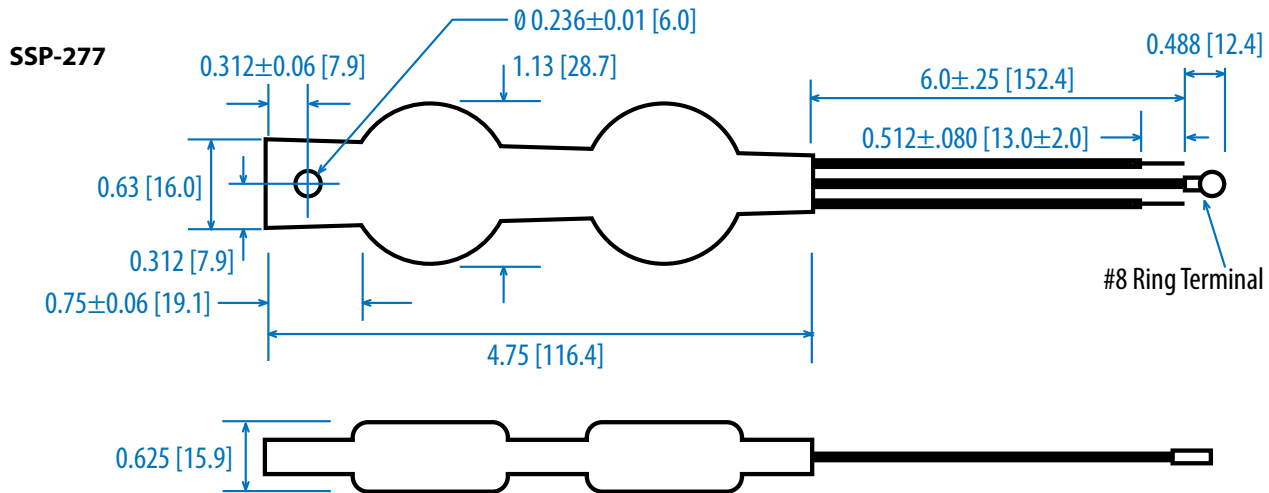

Leads: 6", stripped 0.51"
Weight: 0.1 lbs/45g
Gauge: 14 AWG

Wiring

