



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SSP3-480 Series

3-Point LED Driver Surge Protector
with 20,000 Amp Max Protection, Phase-Phase

Rev 8-10-2017

Intelligent Device
ECOSYSTEM
classic

Features

SSP3-480 surge protectors are designed for use in conjunction with LED Drivers to provide an additional level of cost-effective protection against powerline disturbances in industrial and commercial applications.


- 3-leaded device that protects all single phase coupling modes (Phase1-Phase2, Phase1-Ground & Phase2-Ground) in accordance with IEEE/ANSI C62.41-2002 select guidelines
- Protects against surges and transients per ANSI C62.41-2002 category C low (6KV, 1.2/50µS & 3KA, 8/20µS) standard Combo waves and (6KV, 100KHz) Ring wave
- Protects against surges and transients per new ANSI C82.77-5 2015 category C medium (10KV, 1.2/50µS & 5KA, 8/20µS) standard Combo waves and (6KV, 100KHz) Ring wave
- Basic Protection on Line-Ground (L_1 -G) & (L_2 -G) connections of 12,000 Amps (Max)
- Enhanced Surge Rating on Line-Line (L_1 - L_2) connections of 20,000 Amps (Max) to protect against switching transients found in commercial electrical systems.
- Designated UL 1449 Type 5 Recognized Component in the United States and Canada
- Passes UL1449 Nominal Discharge Current rating of 5,000 Amps in all coupling modes
- At end-of-life, individual surge protection elements will be in short circuit mode for one or more coupling modes
- Maximum surface temperature rated at 90°C
- Operating temperature: -35°C to 85°C (ambient)
- 480V Model: Protection for LED drivers capable of operating at 480V input voltage or with universal input ranges of 277V through 480V or 347V through 480V. Not optimized for use with single voltage devices operating at 277V-only or 347V-only.



Model	AC Mains Voltage	Max Continuous Operating Voltage		Nom Discharge Current I_n (kA)	Measured Limiting Voltage MLV (V)	Max Clamping Voltage 8/20 µS @ 20kA	Max Clamping Voltage 8/20 µS @ 12kA	
		AC	DC			Phase1-Phase2	Phase1-Ground	Phase2-Ground
SSP3-480	480V	550V	745V	5kA	1880 L_1 - L_2 2200 L_1 -G, L_2 -G	3800V	2700V	

Phase1-Ground Phase2-Ground		Phase1-Phase2	
Pulse rating (8 x 20 µSec)		Pulse rating (8 x 20 µSec)	
Strikes	Surge	Strikes	Surge
1	12,000 A	1	20,000 A
2	8,000 A	2	15,000 A
100	3,000 A	15	10,000 A
1600	750 A	100	3,000 A

Dimensions

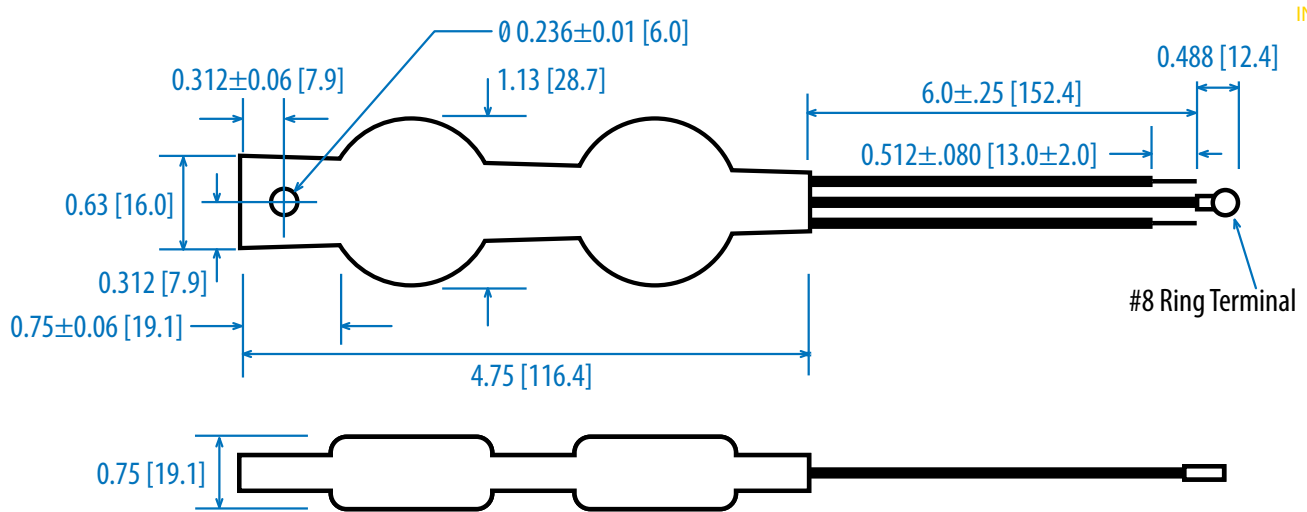

Leads: 6", stripped 0.51"
Weight: 0.15 lbs/68g
Gauge: 14 AWG

Wiring

