



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# ST202E ST232E

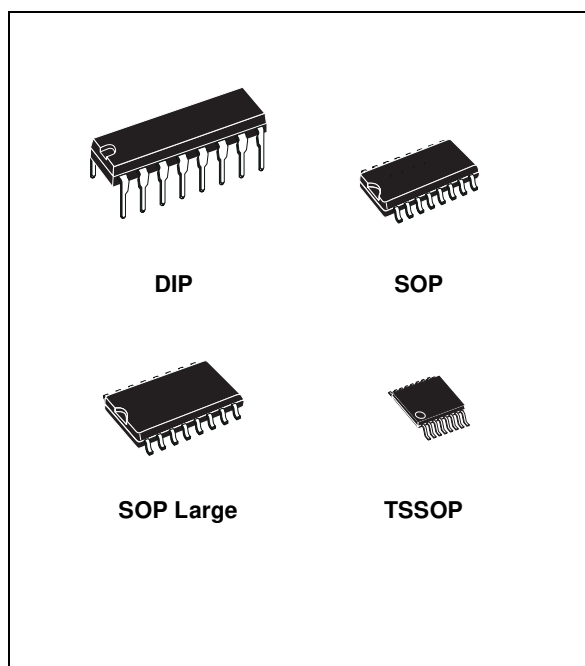
## ± 15KV ESD PROTECTED 5V RS-232 TRANSCEIVER

- ESD PROTECTION FOR RS-232 I/O PINS:  
± 15KV HUMAN BODY MODEL
- GUARANTEED 230kbps DATA RATE
- GUARANTEED SLEW RATE RANGE 3 to 30V/μs
- OPERATE FROM A SINGLE 5V POWER SUPPLY

### DESCRIPTION

The ST202E/ST232E are a 2 driver 2 receiver devices designed for RS-232 and V.28 communications in harsh environments. Each transmitter output and receiver input is protected against ± 15KV electrostatic discharge (ESD) shocks. The drivers meet all EIA/TIA-232E and CCITT V.28 specifications at data rates up to 230Kbps, when loaded in accordance with the EIA/TIA-232E specification. The ST202E/232E use a single 5V supply voltage.


The ST232E operates with four 1μF capacitors, while the ST202E operates with four 0.1μF capacitors, further reducing cost and board space.



### ORDERING CODES

| Type      |           | Temperature Range | Package                   | Comments                            |
|-----------|-----------|-------------------|---------------------------|-------------------------------------|
| ST202ECN  | ST232ECN  | 0 to 70 °C        | DIP-16                    | 25 parts per tube / 40 tube per box |
| ST202EBN  | ST232EBN  | -40 to 85 °C      | DIP-16                    | 25 parts per tube / 40 tube per box |
| ST202EAN  | ST232EAN  | -40 to 125 °C     | DIP-16                    | 25 parts per tube / 40 tube per box |
| ST202ECD  | ST232ECD  | 0 to 70 °C        | SO-16 (Tube)              | 50 parts per tube / 20 tube per box |
| ST202EBD  | ST232EBD  | -40 to 85 °C      | SO-16 (Tube)              | 50 parts per tube / 20 tube per box |
| ST202EAD  | ST232EAD  | -40 to 125 °C     | SO-16 (Tube)              | 50 parts per tube / 20 tube per box |
| ST202ECDR | ST232ECDR | 0 to 70 °C        | SO-16 (Tape & Reel)       | 2500 parts per reel                 |
| ST202EBDR | ST232EBDR | -40 to 85 °C      | SO-16 (Tape & Reel)       | 2500 parts per reel                 |
| ST202EADR | ST232EADR | -40 to 125 °C     | SO-16 (Tape & Reel)       | 2500 parts per reel                 |
| ST202ECW  | ST232ECW  | 0 to 70 °C        | SO-16 Large (Tube)        | 49 parts per tube / 25 tube per box |
| ST202EBW  | ST232EBW  | -40 to 85 °C      | SO-16 Large (Tube)        | 49 parts per tube / 25 tube per box |
| ST202EAW  | ST232EAW  | -40 to 125 °C     | SO-16 Large (Tube)        | 49 parts per tube / 25 tube per box |
| ST202ECWR | ST232ECWR | 0 to 70 °C        | SO-16 Large (Tape & Reel) | 1000 parts per reel                 |
| ST202EBWR | ST232EBWR | -40 to 85 °C      | SO-16 Large (Tape & Reel) | 1000 parts per reel                 |
| ST202EAWR | ST232EAWR | -40 to 125 °C     | SO-16 Large (Tape & Reel) | 1000 parts per reel                 |
| ST202ECTR | ST232ECTR | 0 to 70 °C        | TSSOP16 (Tape & Reel)     | 2500 parts per reel                 |
| ST202EBTR | ST232EBTR | -40 to 85 °C      | TSSOP16 (Tape & Reel)     | 2500 parts per reel                 |
| ST202EATR | ST232EATR | -40 to 125 °C     | TSSOP16 (Tape & Reel)     | 2500 parts per reel                 |
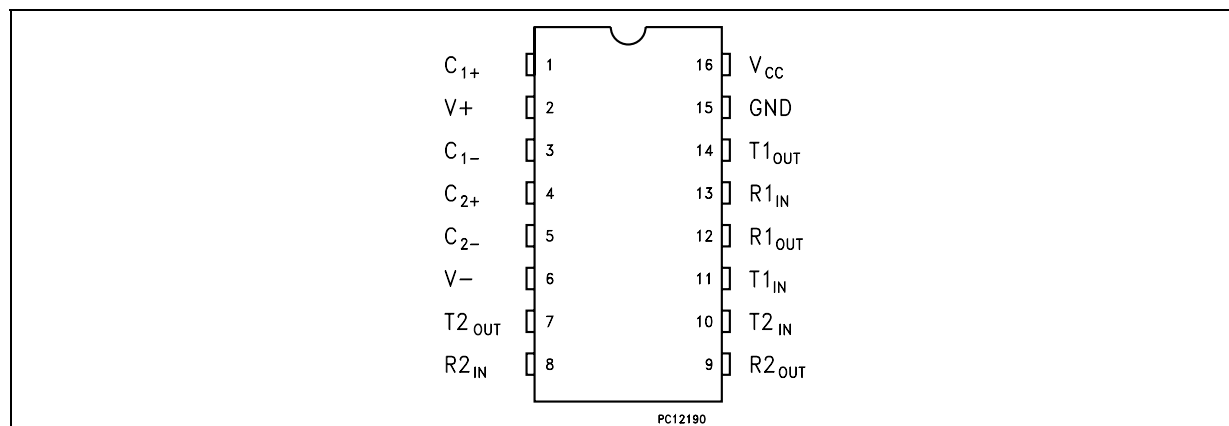
## PIN CONFIGURATION



## PIN DESCRIPTION

| PIN N° | SYMBOL            | NAME AND FUNCTION                                      |
|--------|-------------------|--------------------------------------------------------|
| 1      | C <sub>1+</sub>   | Positive Terminal for the first Charge Pump Capacitor  |
| 2      | V <sub>+</sub>    | Doubled Voltage Terminal                               |
| 3      | C <sub>1-</sub>   | Negative Terminal for the first Charge Pump Capacitor  |
| 4      | C <sub>2+</sub>   | Positive Terminal for the second Charge Pump Capacitor |
| 5      | C <sub>2-</sub>   | Negative Terminal for the second Charge Pump Capacitor |
| 6      | V <sub>-</sub>    | Inverted Voltage Terminal                              |
| 7      | T <sub>2OUT</sub> | Second Transmitter Output Voltage                      |
| 8      | R <sub>2IN</sub>  | Second Receiver Input Voltage                          |
| 9      | R <sub>2OUT</sub> | Second Receiver Output Voltage                         |
| 10     | T <sub>2IN</sub>  | Second Transmitter Input Voltage                       |
| 11     | T <sub>1IN</sub>  | First Transmitter Input Voltage                        |
| 12     | R <sub>1OUT</sub> | First Receiver Output Voltage                          |
| 13     | R <sub>1IN</sub>  | First Receiver Input Voltage                           |
| 14     | T <sub>1OUT</sub> | First Transmitter Output Voltage                       |
| 15     | GND               | Ground                                                 |
| 16     | V <sub>CC</sub>   | Supply Voltage                                         |

## ABSOLUTE MAXIMUM RATINGS

| Symbol              | Parameter                                  | Value                                            | Unit |
|---------------------|--------------------------------------------|--------------------------------------------------|------|
| V <sub>CC</sub>     | Supply Voltage                             | -0.3 to 6                                        | V    |
| V <sub>+</sub>      | Extra Positive Voltage                     | (V <sub>CC</sub> - 0.3) to 14                    | V    |
| V <sub>-</sub>      | Extra Negative Voltage                     | -14 to 0.3                                       | V    |
| T <sub>IN</sub>     | Transmitter Input Voltage Range            | -0.3 to (V <sub>+</sub> + 0.3)                   | V    |
| R <sub>IN</sub>     | Receiver Input Voltage Range               | ± 30                                             | V    |
| T <sub>OUT</sub>    | Transmitter Output Voltage Range           | (V <sub>-</sub> - 0.3) to (V <sub>+</sub> + 0.3) | V    |
| R <sub>OUT</sub>    | Receiver Output Voltage Range              | -0.3 to (V <sub>CC</sub> + 0.3)                  | V    |
| T <sub>SCTOUT</sub> | Short Circuit Duration on T <sub>OUT</sub> | infinite                                         |      |
| T <sub>stg</sub>    | Storage Temperature Range                  | -65 to + 150                                     | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

**ESD PERFORMANCE: TRANSMITTER OUTPUTS, RECEIVER INPUTS**

| Symbol | Parameter              | Test Conditions                  | Min. | Typ. | Max. | Unit |
|--------|------------------------|----------------------------------|------|------|------|------|
| ESD    | ESD Protection Voltage | Human Body Model                 | ± 15 |      |      | KV   |
| ESD    | ESD Protection Voltage | IEC 1000-4-2 (Contact Discharge) | ± 6  |      |      | KV   |
| ESD    | ESD Protection Voltage | IEC 1000-4-2 (Air Discharge)     | ± 8  |      |      | KV   |

Note: All test versus GND.

**ELECTRICAL CHARACTERISTICS**

( $C_1 - C_4 = 0.1\mu\text{F}$  for ST202E,  $C_1 - C_4 = 1\mu\text{F}$  for ST232E,  $V_{\text{CC}} = 5\text{V} \pm 10\%$ ,  $T_A = -40$  to  $125^\circ\text{C}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ )

| Symbol              | Parameter                            | Test Conditions                   | Min. | Typ. | Max. | Unit |
|---------------------|--------------------------------------|-----------------------------------|------|------|------|------|
| $I_{\text{SUPPLY}}$ | $V_{\text{CC}}$ Power Supply Current | No Load, $T_A = 25^\circ\text{C}$ |      | 5    | 10   | mA   |

**TRANSMITTER ELECTRICAL CHARACTERISTICS**

( $C_1 - C_4 = 0.1\mu\text{F}$  for ST202E,  $C_1 - C_4 = 1\mu\text{F}$  for ST232E,  $V_{\text{CC}} = 5\text{V} \pm 10\%$ ,  $T_A = -40$  to  $125^\circ\text{C}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ )

| Symbol            | Parameter                                | Test Conditions                                                                                                                     | Min. | Typ. | Max. | Unit                   |
|-------------------|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| $V_{\text{TOUT}}$ | Output Voltage Swing                     | All Transmitter outputs are loaded with $3\text{K}\Omega$ to GND                                                                    | ± 5  | ± 9  |      | V                      |
| $I_{\text{TIL}}$  | Input Leakage Current                    |                                                                                                                                     |      |      | ± 1  | $\mu\text{A}$          |
| $V_{\text{TIL}}$  | Input Logic Threshold Low                |                                                                                                                                     | 0.8  |      |      | V                      |
| $V_{\text{TIH}}$  | Input Logic Threshold High               |                                                                                                                                     |      |      | 2    | V                      |
| $\text{SR}_T$     | Transition Slew Rate                     | $T_A = 25^\circ\text{C}$ , $V_{\text{CC}} = 5\text{V}$<br>$R_L = 3$ to $7\text{K}\Omega$ , $C_L = 50$ to $1000\text{pF}$<br>(Note1) | 3    | 6    | 30   | $\text{V}/\mu\text{s}$ |
| $D_R$             | Data Rate                                | $R_L = 3$ to $7\text{K}\Omega$ , $C_L = 50$ to $1000\text{pF}$<br>one transmitter switching                                         | 230  | 400  |      | Kbits/s                |
| $R_{\text{TOUT}}$ | Transmitter Output Resistance            | $V_{\text{CC}} = V_+ = V_- = 0\text{V}$ $V_{\text{OUT}} = \pm 2\text{V}$                                                            | 300  |      |      | $\Omega$               |
| $I_{\text{SC}}$   | Transmitter Output Short Circuit Current |                                                                                                                                     |      | ±10  | ±60  | mA                     |
| $t_{\text{DT}}$   | Transmitter Propagation Delay            | $R_L = 3$ to $7\text{K}\Omega$ , $C_L = 50$ to $2500\text{pF}$<br>All transmitter loaded                                            |      | 2    |      | $\mu\text{A}$          |


Note 1: Measured from 3V to -3V or from -3V to 3V.

Note2: One transmitter output is loaded with  $R_L = 3\text{K}\Omega$  to  $7\text{K}\Omega$ ,  $C_L = 50$  to  $1000\text{pF}$

**RECEIVER ELECTRICAL CHARACTERISTICS**

( $C_1 - C_4 = 0.1\mu\text{F}$  for ST202E,  $C_1 - C_4 = 1\mu\text{F}$  for ST232E,  $V_{CC} = 5\text{V} \pm 10\%$ ,  $T_A = -40$  to  $125^\circ\text{C}$ , unless otherwise specified. Typical values are referred to  $T_A = 25^\circ\text{C}$ )
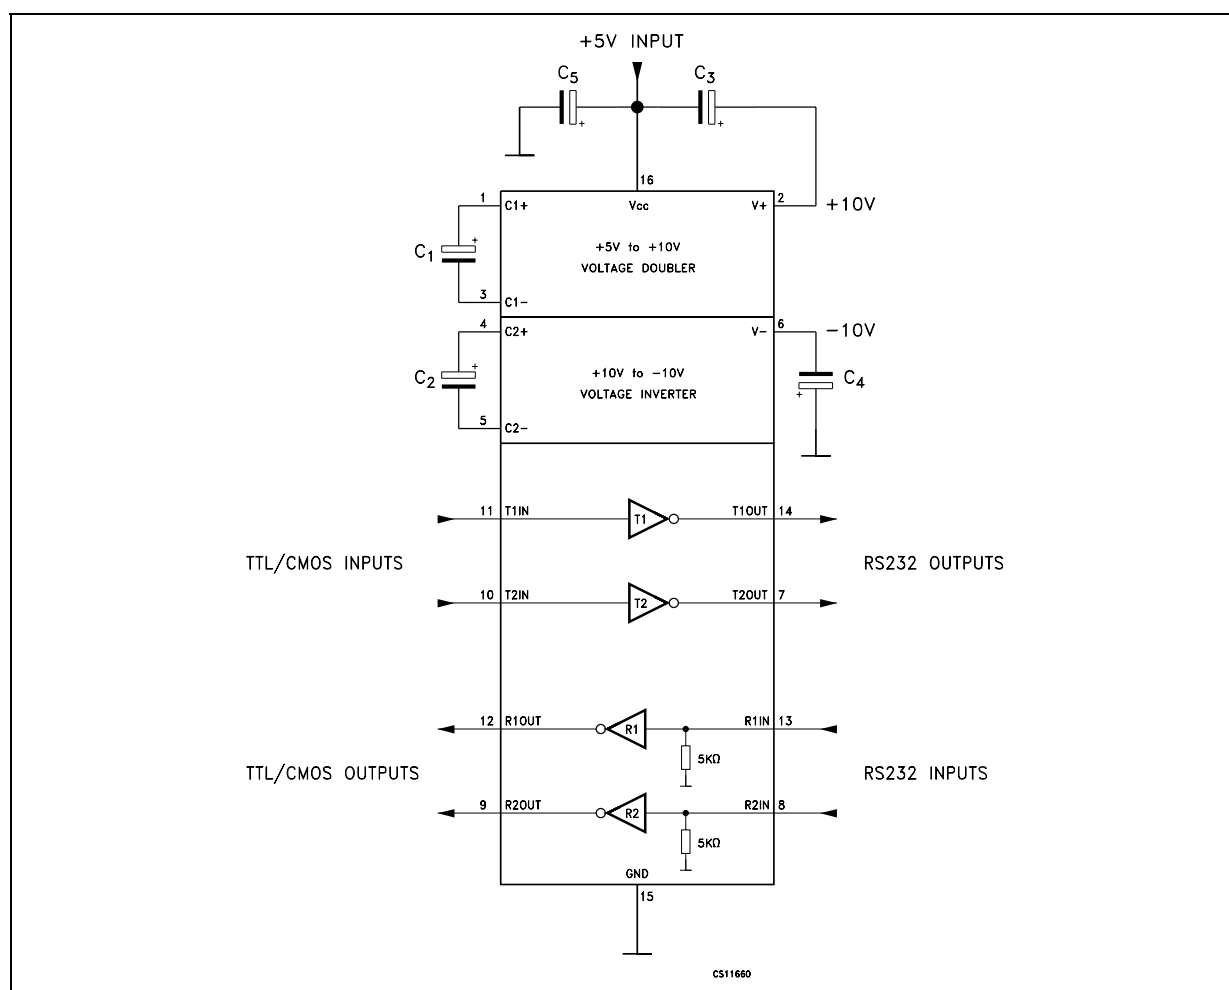
| Symbol      | Parameter                              | Test Conditions                                 | Min. | Typ.         | Max. | Unit             |
|-------------|----------------------------------------|-------------------------------------------------|------|--------------|------|------------------|
| $V_{RIN}$   | Receiver Input Voltage Operating Range |                                                 | -30  |              | 30   | V                |
| $R_{RIN}$   | RS-232 Input Resistance                | $T_A = 25^\circ\text{C}$ , $V_{CC} = 5\text{V}$ | 3    | 5            | 7    | $\text{K}\Omega$ |
| $V_{RIL}$   | RS-232 Input Logic Threshold Low       | $T_A = 25^\circ\text{C}$ , $V_{CC} = 5\text{V}$ | 0.8  | 1.2          |      | V                |
| $V_{RIH}$   | RS-232 Input Logic Threshold High      | $T_A = 25^\circ\text{C}$ , $V_{CC} = 5\text{V}$ |      | 1.7          | 2.4  | V                |
| $V_{RIHYS}$ | RS-232 Input Hysteresis                | $V_{CC} = 5\text{V}$                            | 0.2  | 0.5          | 1    | V                |
| $V_{ROL}$   | TTL/CMOS Output Voltage Low            | $I_{OUT} = 3.2\text{mA}$                        |      |              | 0.4  | V                |
| $V_{ROH}$   | TTL/CMOS Output Voltage High           | $I_{OUT} = -1\text{mA}$                         | 3.5  | $V_{CC}-0.4$ |      | V                |
| $t_{DR}$    | Receiver Propagation Delay             | $C_L = 150\text{pF}$                            |      | 0.5          | 10   | $\mu\text{s}$    |





**APPLICATION CIRCUITS** (note 1, note 2)







Note 1:  $C_{1-4}$  capacitors can even be  $1\mu\text{F}$  ones.

Note 2:  $C_{1-4}$  can be common or biased capacitors.

**CAPACITANCE VALUE ( $\mu\text{F}$ )**

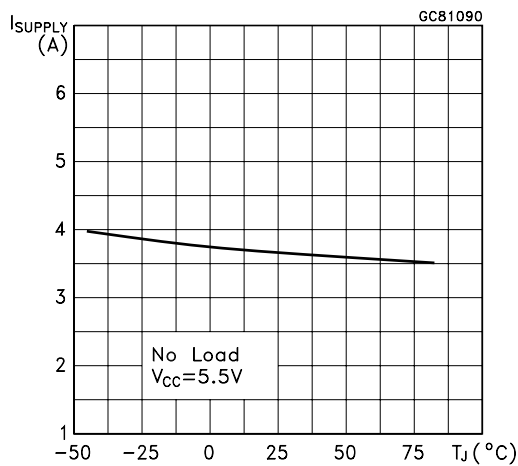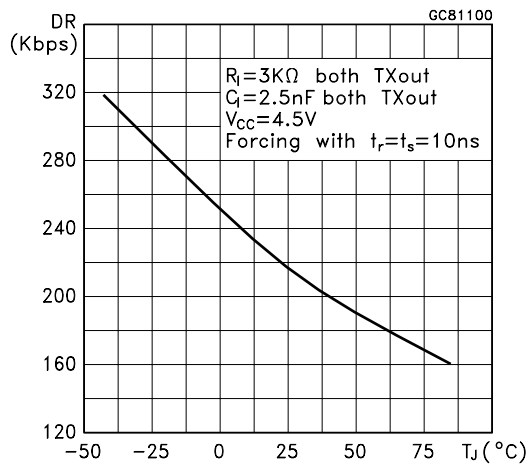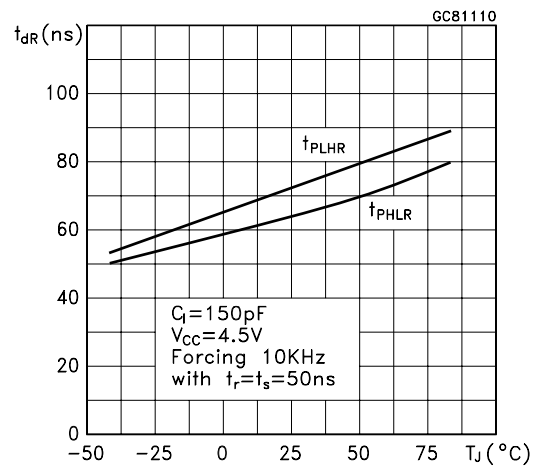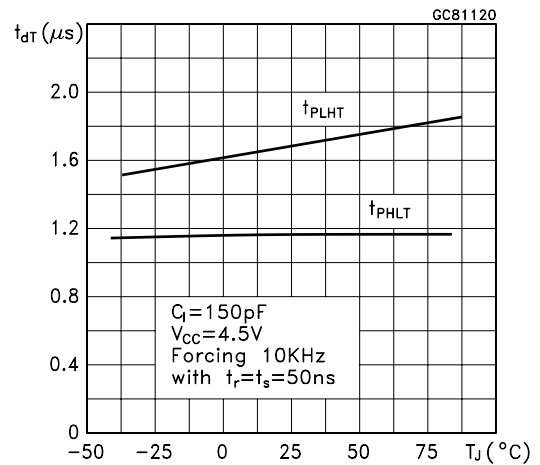
| DEVICES | C1  | C2. | C3  | C4  | C5  |
|---------|-----|-----|-----|-----|-----|
| ST202E  | 0.1 | 0.1 | 0.1 | 0.1 | 0.1 |
| ST232E  | 1   | 1   | 1   | 1   | 1   |

**TYPICAL PERFORMANCE CHARACTERISTICS** (unless otherwise specified  $T_J = 25^\circ\text{C}$ )**Figure 1 : Supply Current vs Temperature****Figure 2 : Data Rate vs Temperature****Figure 3 : Receiver Propagation Delay****Figure 4 : Driver Propagation Delay**

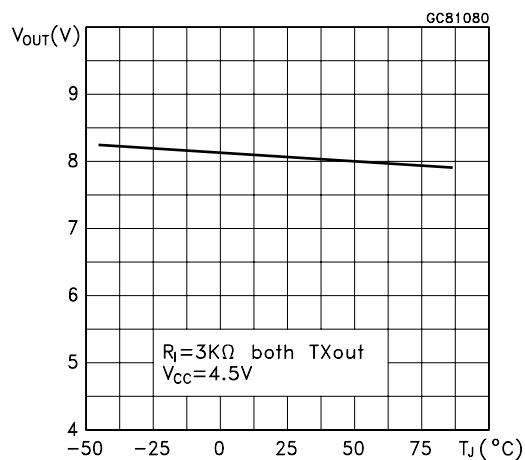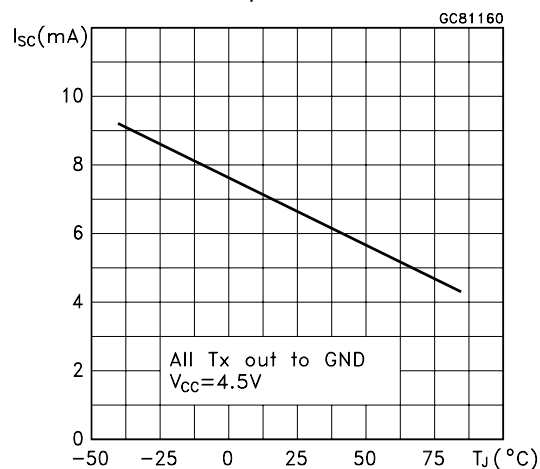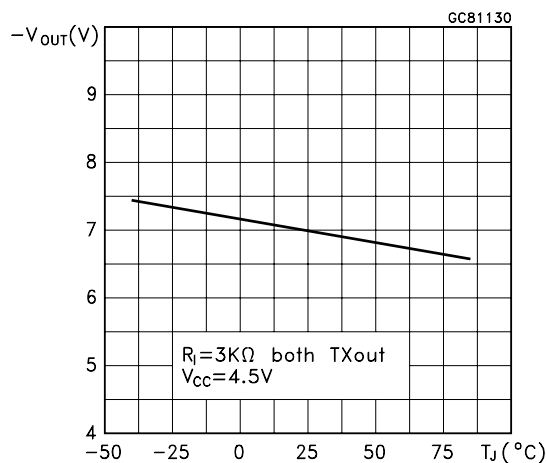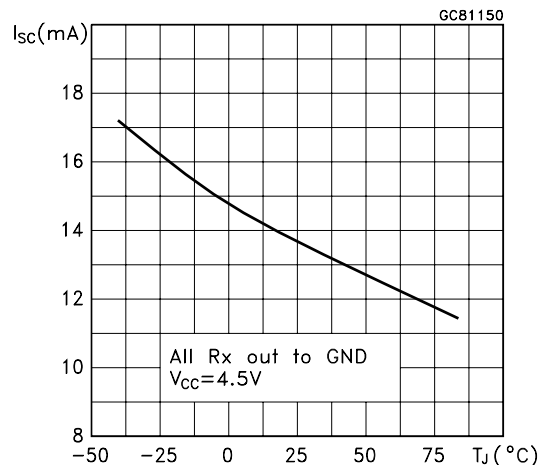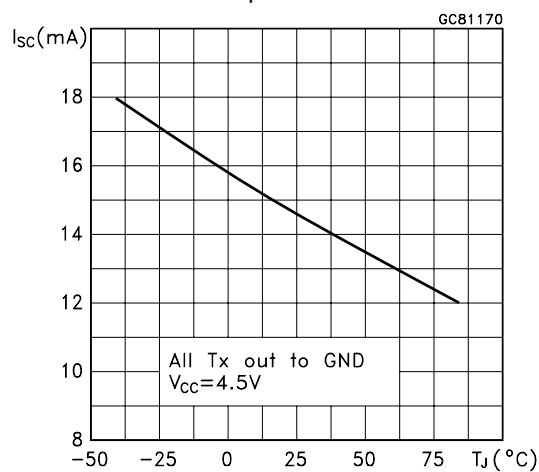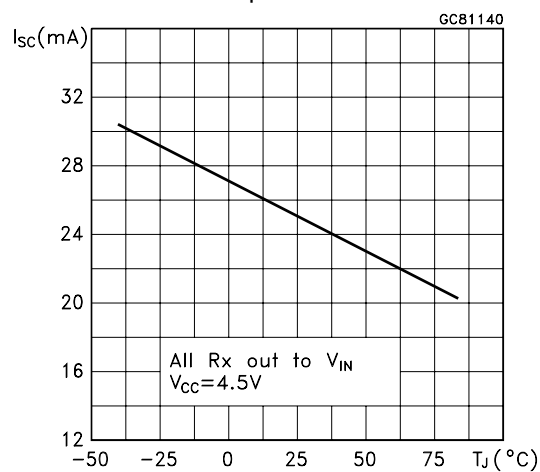**Figure 5 : High Level Output Voltage Swing vs Temperature****Figure 8 : Low Level Transmitter Output Short Circuit Current vs Temperature****Figure 6 : Low Level Output Voltage Swing vs Temperature****Figure 9 : High Level Receiver Output Short Circuit Current vs Temperature****Figure 7 : High Level Transmitter Output Short Circuit Current vs Temperature****Figure 10 : Low Level Receiver Output Short Circuit Current vs Temperature**


**Plastic DIP-16 (0.25) MECHANICAL DATA**
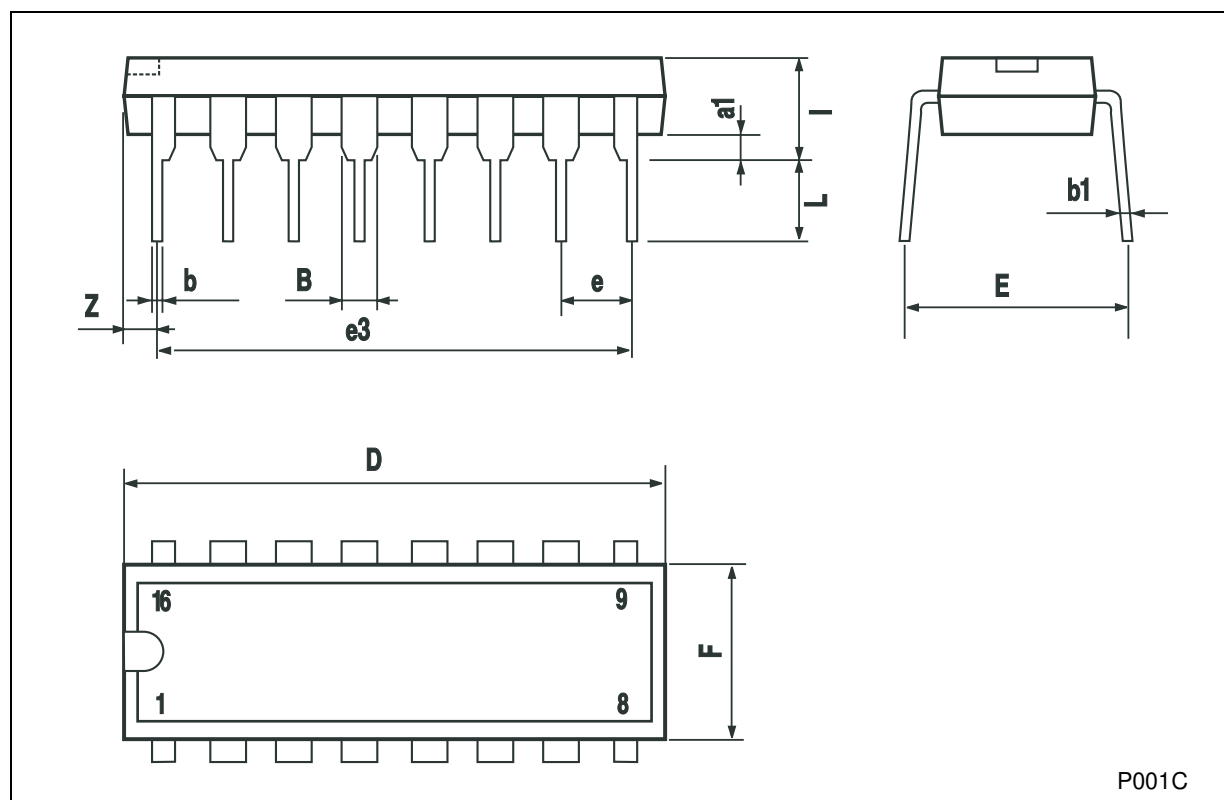
| DIM. | mm.  |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP   | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.77 |       | 1.65 | 0.030 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |



SO-16 MECHANICAL DATA

| DIM. | mm.        |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.004 |       | 0.008 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 8.89 |      |       | 0.350 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.62 |       |       | 0.024 |
| S    | 8° (max.)  |      |      |       |       |       |

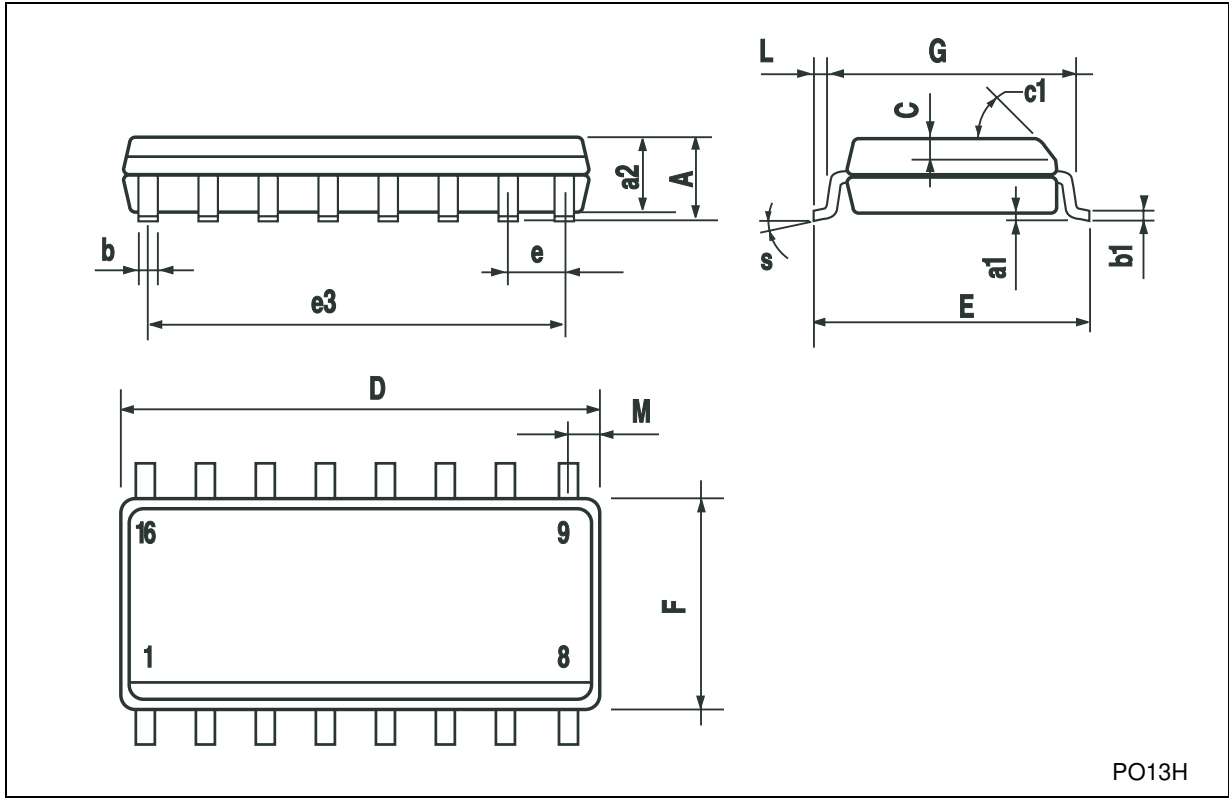


PO13H



## SO-16L MECHANICAL DATA

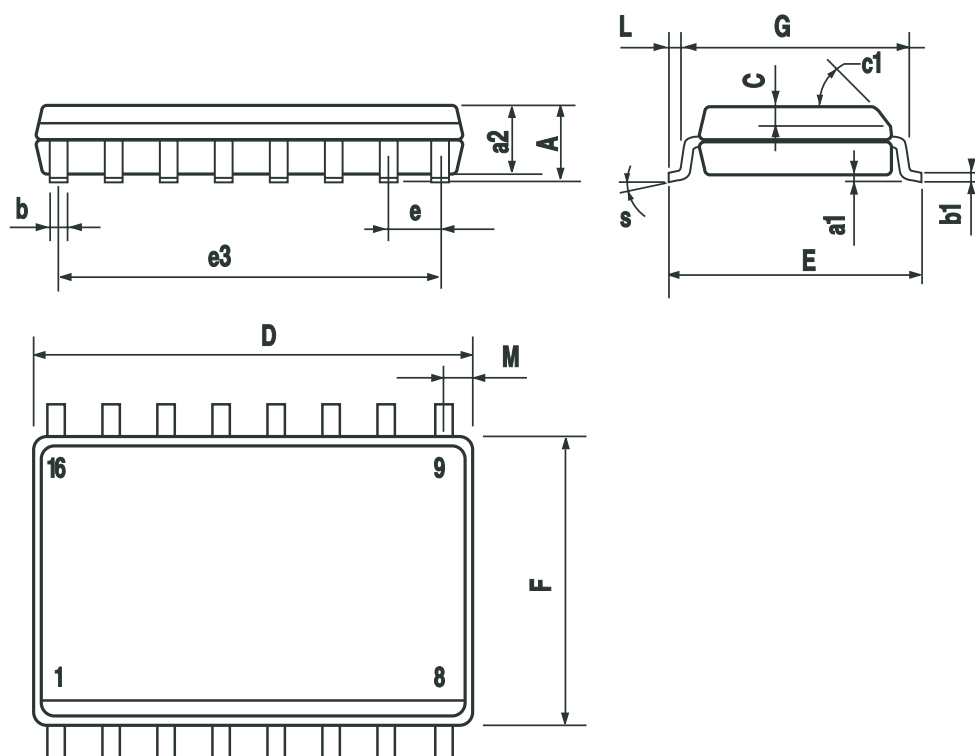
| DIM. | mm.        |      |       | inch  |       |       |
|------|------------|------|-------|-------|-------|-------|
|      | MIN.       | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |      | 2.65  |       |       | 0.104 |
| a1   | 0.1        |      | 0.2   | 0.004 |       | 0.008 |
| a2   |            |      | 2.45  |       |       | 0.096 |
| b    | 0.35       |      | 0.49  | 0.014 |       | 0.019 |
| b1   | 0.23       |      | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.5  |       |       | 0.020 |       |
| c1   | 45° (typ.) |      |       |       |       |       |
| D    | 10.1       |      | 10.5  | 0.397 |       | 0.413 |
| E    | 10.0       |      | 10.65 | 0.393 |       | 0.419 |
| e    |            | 1.27 |       |       | 0.050 |       |
| e3   |            | 8.89 |       |       | 0.350 |       |
| F    | 7.4        |      | 7.6   | 0.291 |       | 0.300 |
| G    |            |      |       |       |       |       |
| L    | 0.5        |      | 1.27  | 0.020 |       | 0.050 |
| M    |            |      | 0.75  |       |       | 0.029 |
| S    | 8          |      |       |       |       |       |



PO131

## TSSOP16 MECHANICAL DATA

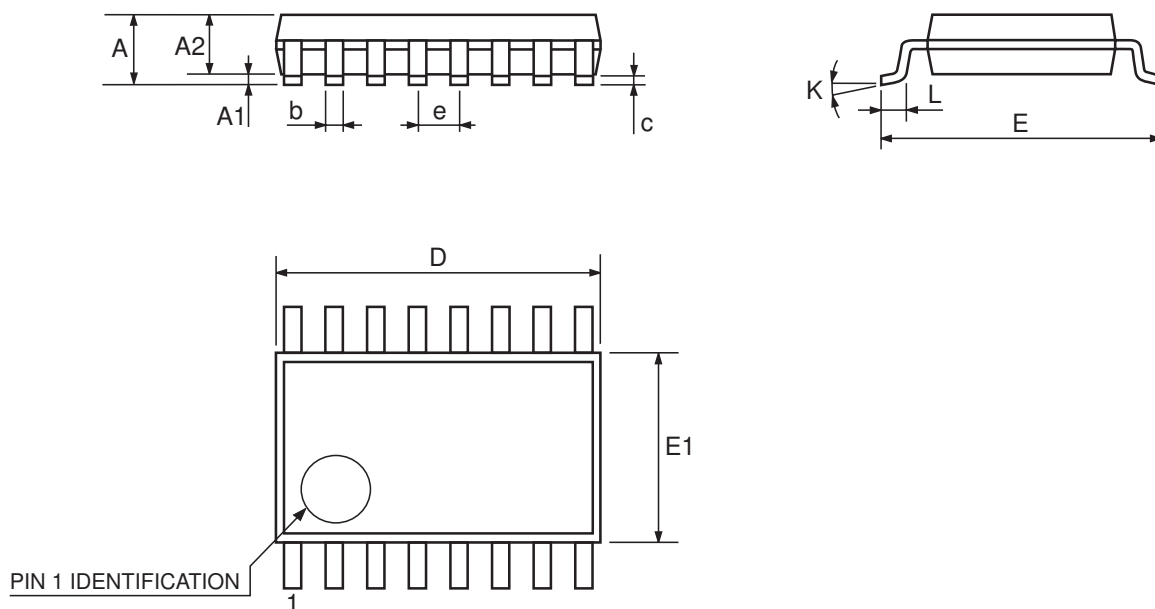
| DIM. | mm.  |          |      | inch  |            |        |
|------|------|----------|------|-------|------------|--------|
|      | MIN. | TYP      | MAX. | MIN.  | TYP.       | MAX.   |
| A    |      |          | 1.2  |       |            | 0.047  |
| A1   | 0.05 |          | 0.15 | 0.002 | 0.004      | 0.006  |
| A2   | 0.8  | 1        | 1.05 | 0.031 | 0.039      | 0.041  |
| b    | 0.19 |          | 0.30 | 0.007 |            | 0.012  |
| c    | 0.09 |          | 0.20 | 0.004 |            | 0.0079 |
| D    | 4.9  | 5        | 5.1  | 0.193 | 0.197      | 0.201  |
| E    | 6.2  | 6.4      | 6.6  | 0.244 | 0.252      | 0.260  |
| E1   | 4.3  | 4.4      | 4.48 | 0.169 | 0.173      | 0.176  |
| e    |      | 0.65 BSC |      |       | 0.0256 BSC |        |
| K    | 0°   |          | 8°   | 0°    |            | 8°     |
| L    | 0.45 | 0.60     | 0.75 | 0.018 | 0.024      | 0.030  |



0080338D


## Tape &amp; Reel SO-16 MECHANICAL DATA
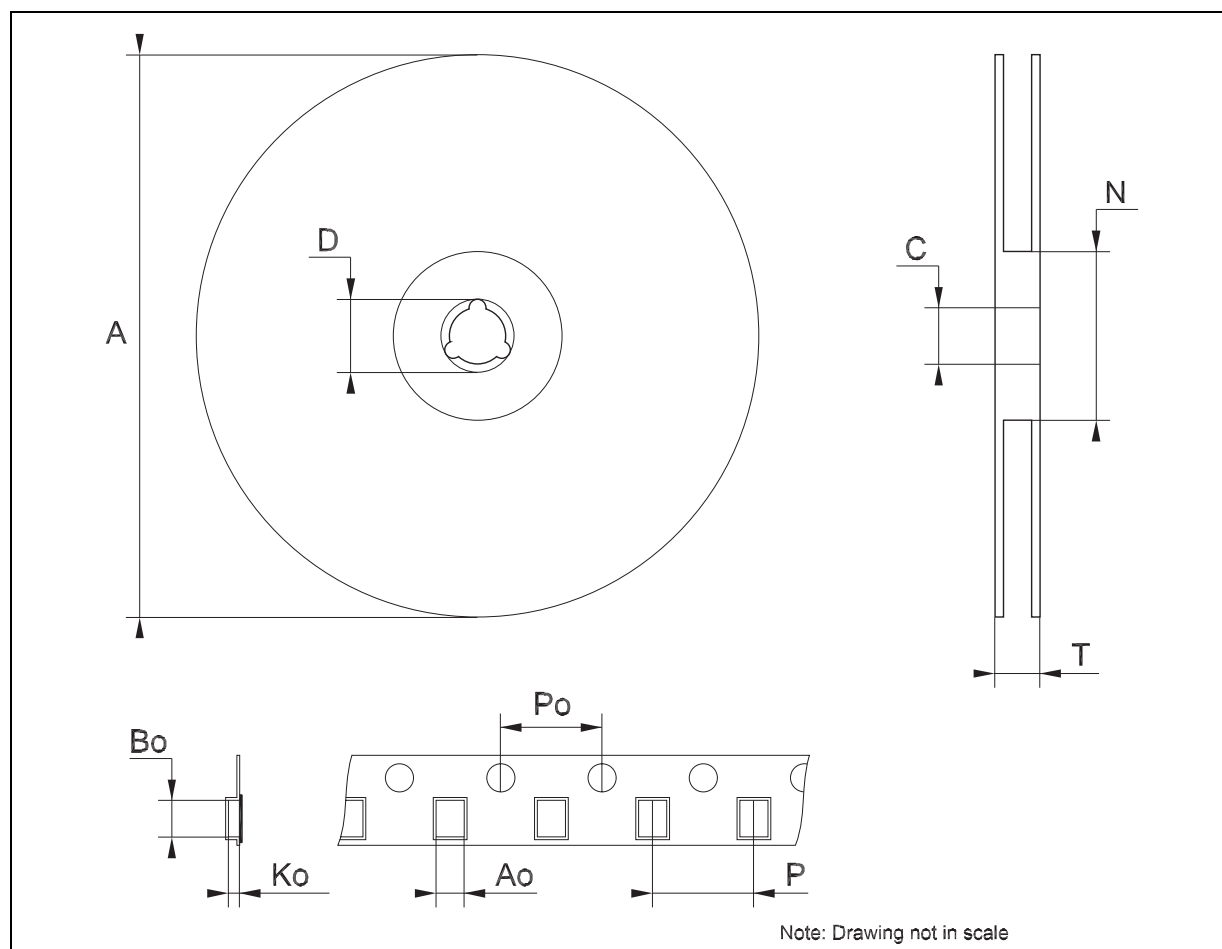
| DIM. | mm.  |     |      | inch  |      |        |
|------|------|-----|------|-------|------|--------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.   |
| A    |      |     | 330  |       |      | 12.992 |
| C    | 12.8 |     | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |     |      | 0.795 |      |        |
| N    | 60   |     |      | 2.362 |      |        |
| T    |      |     | 22.4 |       |      | 0.882  |
| Ao   | 6.45 |     | 6.65 | 0.254 |      | 0.262  |
| Bo   | 10.3 |     | 10.5 | 0.406 |      | 0.414  |
| Ko   | 2.1  |     | 2.3  | 0.082 |      | 0.090  |
| Po   | 3.9  |     | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |     | 8.1  | 0.311 |      | 0.319  |




## Tape &amp; Reel SO-16L MECHANICAL DATA
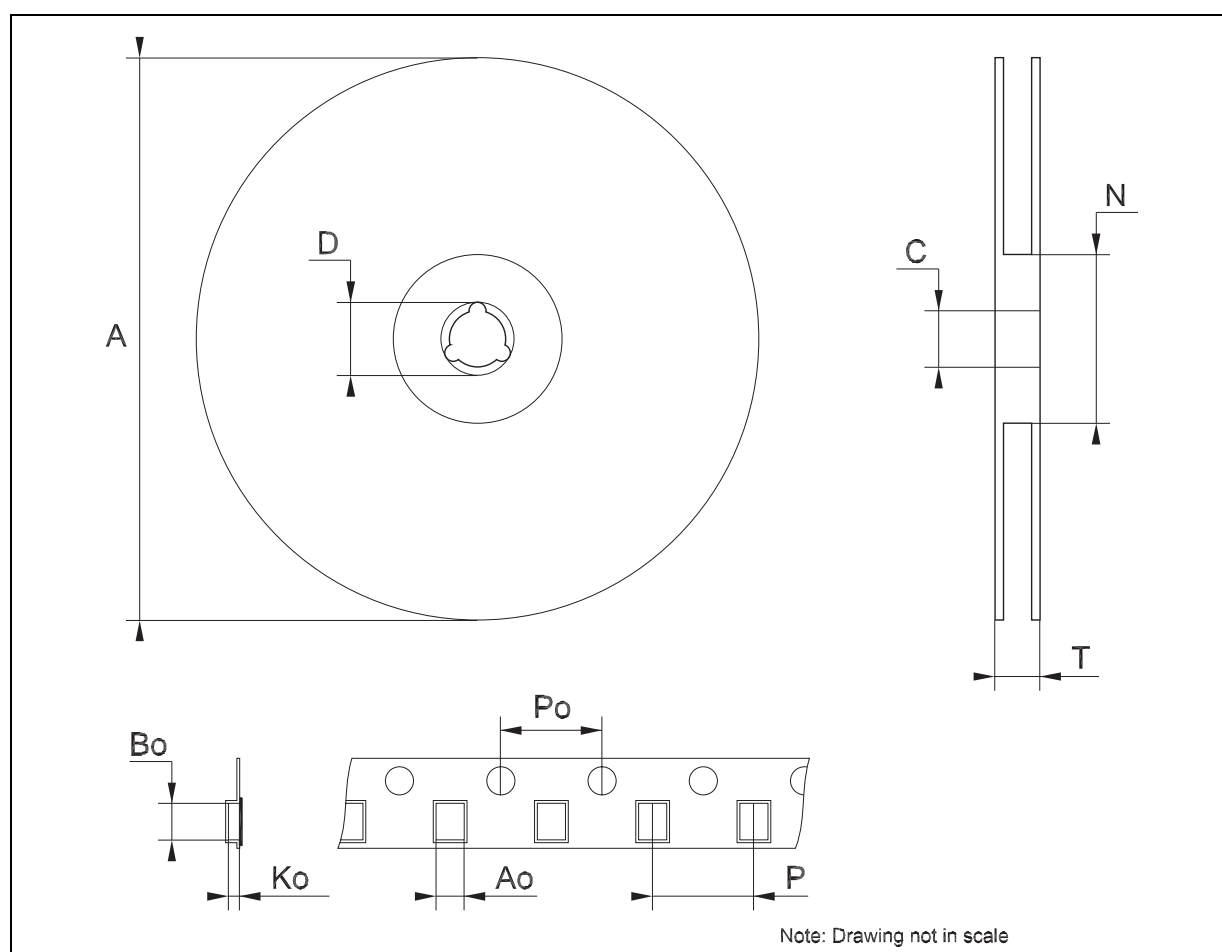
| DIM. | mm.  |     |      | inch  |      |        |
|------|------|-----|------|-------|------|--------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.   |
| A    |      |     | 330  |       |      | 12.992 |
| C    | 12.8 |     | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |     |      | 0.795 |      |        |
| N    | 60   |     |      | 2.362 |      |        |
| T    |      |     | 22.4 |       |      | 0.882  |
| Ao   | 10.8 |     | 11.0 | 0.425 |      | 0.433  |
| Bo   | 10.7 |     | 10.9 | 0.421 |      | 0.429  |
| Ko   | 2.9  |     | 3.1  | 0.114 |      | 0.122  |
| Po   | 3.9  |     | 4.1  | 0.153 |      | 0.161  |
| P    | 11.9 |     | 12.1 | 0.468 |      | 0.476  |



### Tape & Reel TSSOP16 MECHANICAL DATA
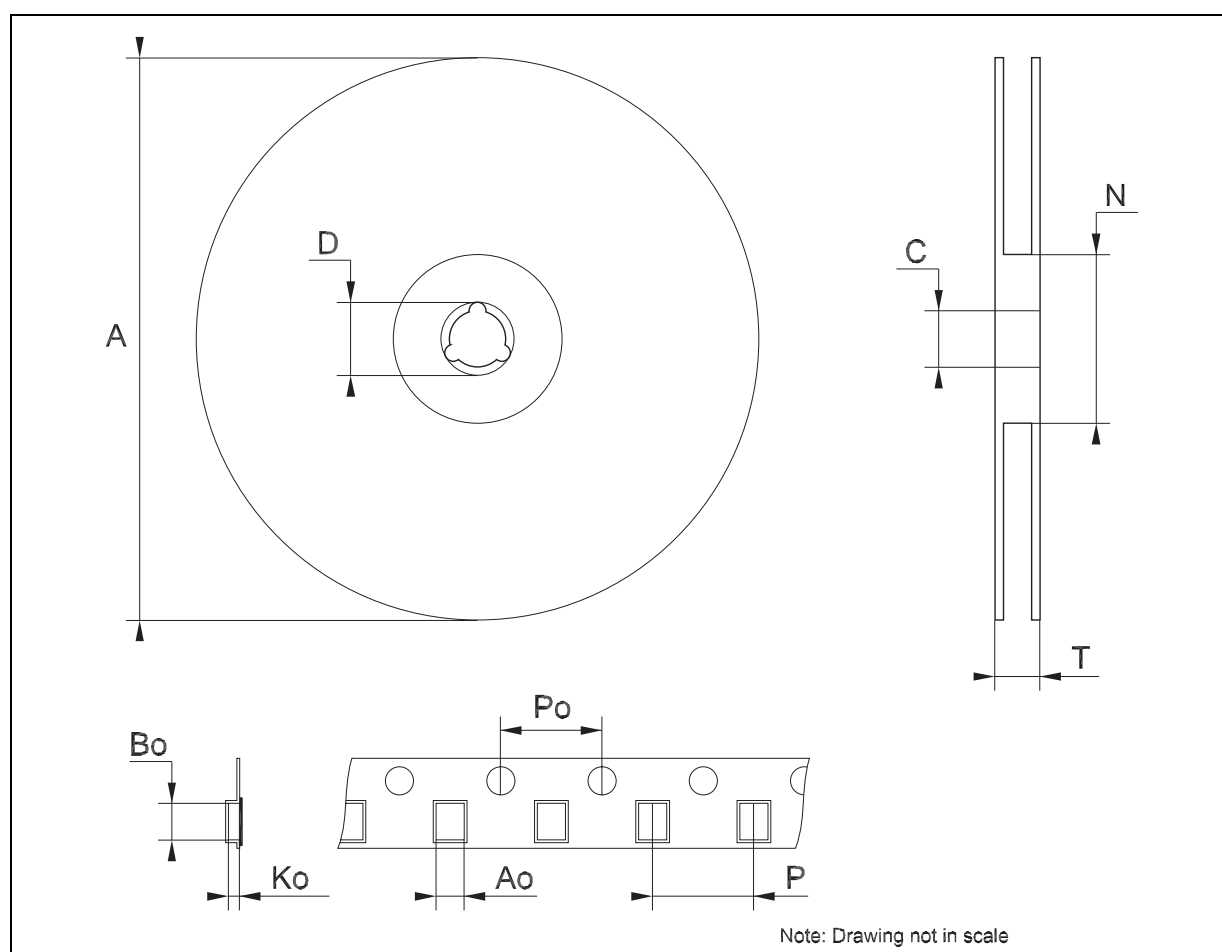
| DIM. | mm.  |     |      | inch  |      |        |
|------|------|-----|------|-------|------|--------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.   |
| A    |      |     | 330  |       |      | 12.992 |
| C    | 12.8 |     | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |     |      | 0.795 |      |        |
| N    | 60   |     |      | 2.362 |      |        |
| T    |      |     | 22.4 |       |      | 0.882  |
| Ao   | 6.7  |     | 6.9  | 0.264 |      | 0.272  |
| Bo   | 5.3  |     | 5.5  | 0.209 |      | 0.217  |
| Ko   | 1.6  |     | 1.8  | 0.063 |      | 0.071  |
| Po   | 3.9  |     | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |     | 8.1  | 0.311 |      | 0.319  |



Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
All other names are the property of their respective owners

© 2003 STMicroelectronics - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -  
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>