



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Military Spec Silicone Tape

FireFlex self-fusing silicone tape is a unique adhesive free product that quickly fuses to itself to create a moisture and corrosion resistant continuous seal for electrical insulation, pipe and hose repair, or anywhere a quick and residue free wrap is needed.

FireFlex Silicone Tape creates an airtight/watertight seal around even irregularly shaped applications, and the high insulation values make it useful in repairing cracked or damaged insulation in Class A and B applications.

Resistant to engine fluids, solvents, high-heat, and molten metal splashes, seal silicone tape can withstand the harshest of environments. A wide operating temperature of -85°F to 500°F makes it excellent for automotive, industrial, and marine applications, as well as a perfect end termination for our FireFlex Silicone Sleeving.

Ideal to keep in a toolbox for emergency repairs on wires or hoses, as a residue free solution to coil extension cords, ropes, and cables, and for a waterproof, heat, and chemical resistant wrap for wiring harnesses and splices.



- **A-A-59163**
- **Mil-I-46852**
- **Self-Fusing**
- **Air & Moisture Tight Seal**
- **Prevents Corrosion**
- **No Adhesive, Bonds Only to Itself**
- **Resists Weathering**
- **Conforms to Irregular Shapes**
- **Elastic Memory Seal**
- **Cures in 24 Hours at Room Temperature**



Colored guide line only on TGL (Triangular Guide Line) tapes.

AUDIO/VIDEO



COMPUTERS



AUTOMOTIVE



HOME



GARDEN



CONSTRUCTION



PLUMBING



ELECTRICAL




INSULATION CLASS

May be used in many Class A & Class B applications.

CLASS*	20,000 HR LIFE TEMP.
A	221°F (105°C)
B	266°F (130°C)

*The temperature classification indicates the maximum (hot-spot) temp. at which the insulation system can be operated for normal expected service life.

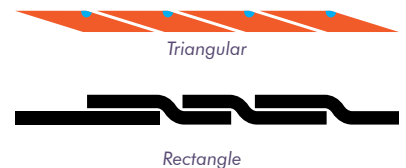

Width	Part #	Wall Thickness	Type	Class	Available Colors	Roll	Lbs/Roll
1"	STA1.00BK36	0.020"	Triangular	A	BK	36'	0.29
1"	STA1.00RD36	0.020"	Triangular	A	RD	36'	0.33
1"	STB1.00BK36	0.040"	Triangular	B	BK	36'	0.57
1"	SRA1.00BK36	0.020"	Rectangle	A	BK	36'	0.45
1"	SRA1.00RD36	0.020"	Rectangle	A	RD	36'	0.50
1"	SRB1.00BK36	0.040"	Rectangle	B	BK	36'	0.75