



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Single phase, primary switched mode power supply **PEL 230/24-1,3**



Advantages

Stabilised and adjustable output voltage
DC OK signalling via LEDs
Parallel connection option
Service-friendly spring-loaded connector system
Panel installation on mounting rails

Applications

Primary switch mode power supply is concentrated on the core task of voltage and current supply. Flat step profile optimized for installation in control panels in the building automation.

Standards

Primary switched mode power supply
to UL 60950, UL 508

Safety:
EN 61558-2-17, EN 60950 (SELV)

EMC:
EN 61204-3

Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




Single phase, primary switched mode power supply

PEL 230/24-1,3

Type		PEL 230/24-1,3
Electrical data	Input	
	Input rated voltage	100 - 240 Vac
	Input voltage range	85 - 264 Vac (120 - 373 Vdc)
	Input rated current (rated load)	0.7 / 0.4 A (110 / 230 Vac)
	Rated frequency range	44 - 66 Hz / 0 Hz
	Starting current limiter	<30 A, NTC
	Input fuse internal	2 A (slow-blow)
	Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristics B, C
	Mains buffering	10 / 80 ms
	Output	
	Output rated voltage	24 Vdc ±2 %
	Output voltage range	22.8 - 26.4 Vdc
	Output rated current	1.30 A
	Overload behaviour	Constant current
	Ripple factor	typ. 100 mVss
Parallel connection	Yes	
Serial operation	Yes	
Efficiency	typ. 82 %	
Signalling		
Power Good (DC OK)	LED green	
Feedback voltage max.	30 Vdc	
Standards		
Classification	Primary switched mode power supply	
Approvals		
Approvals	cURus, cULus, GL	
Environment		
Ambient temperature	-25° C to +55° C	
Storage temperature	-25° C to +85° C	
Derating	-3 %/K > +45° C	
Current capacity by any mounting position	max. 0.9 A	
Safety and protection		
Protection index	IP 20	
Safety class	II, (in closed cabinet)	
Order numbers		
Order Number	PEL 230/24-1,3	

Type		PEL 230/24-1,3
Mechanical data	Terminal and mounting	
	Connections output, (spring clamp terminal)	max. 2.5 mm ²
	Connections input, (spring clamp terminal)	max. 2.5 mm ²
	Mounting position	vertical
	Fixing method	DIN Rail system TH 35
Measures and weights		
Weight	0.17 kg	

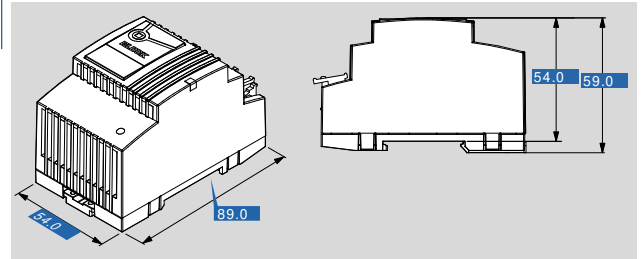

Subjects to change.