



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






## Wireless receiver RF Rx SW915-TCP/IP Material number: 1266820

### Features/Options:

- sWave® wireless technology
- Communication via UDP or TCP/IP (Server or Client - Mode)
- Webserver based Setup

- Transmitter/receiver assignment by teaching mode
- LEDs for indication of operating state
- SMA plug-in connector for external antenna

### Dimensions

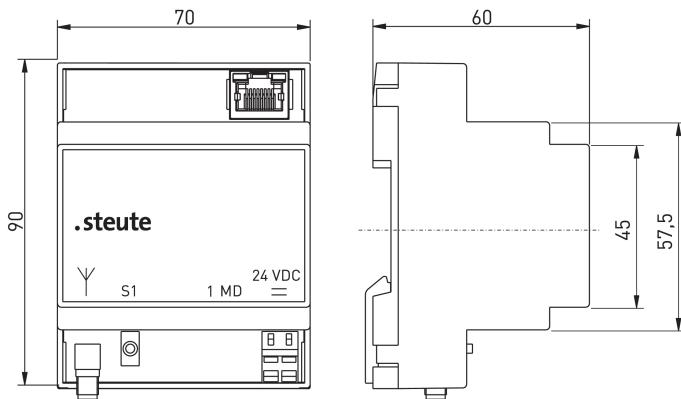

### Technical data

|  |  |
|--|--|
| Standards                              | EN 60947-5-1; EN 61000-6-2, -6-3, EN 61000-4-2, -4-20, -4-4, -4-5, -4-6; EN 60068-2-6, EN 60068-2-27; EN 301 489-1; EN 301 489-3; EN 300 220-1; EN 300 220-2 |
| Mounting                               | DIN rail mounting  |
| Connection                             | terminals with CAGE CLAMP WAGO Series 236: 0.08 ... 2.5 mm <sup>2</sup> / AWG 28-12, AWG 12: THHN, THWN, stripping length 5 ... 6 mm / 0.22 in               |
| Network interface                      | 10/100 Base-T Ethernet (Auto detection) via RJ 45  |
| Software interface                     | TCP (Client, Server) / UDP / IP (DHCP)   |
| Degree of protection                   | IP 20 to IEC/EN 60529  |
| Rated operating current I <sub>e</sub> | 24 VDC: max. 0.06 A  |
| Rated operating voltage U <sub>e</sub> | 24 VDC -15 % ... +10 %   |
| Frequency                              | 915 MHz (USA, Canada and Mexico)   |
| Display                                | green LED: Reset state<br>orange LED: signalisation of telegram  |
| Degree of pollution                    | 2 to IEC/EN 60664-1  |
| Ambient temperature                    | 0 °C ... +55 °C  |
| Storage and shipping temperature       | -25 °C ... +85 °C  |
| External antenna                       | always required for optimum wireless range   |
| Approvals                              | USA: FCC: XK5-RFRXSW915;<br>Canada: IC: 5158A-RFRXSW915<br>Mexico: IFT/223/UCS/DG-AUSE/6773/2017   |



Errors and omissions excepted.



Wireless receiver  
RF Rx SW915-TCP/IP  
Material number: 1266820