



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PANDUIT

CABLE TIE INSTALLATION TOOL

Part No. STHV

FOR INSTALLING:
Pan-Ty and Dome-Top Barb Ty Nylon Cable Ties of
Light-Heavy (LH), and Heavy (H) cross sections.

READ OPERATION INSTRUCTIONS BEFORE USING

NOT INTENDED FOR MEDICAL USE.

User is responsible to determine suitability of
product for intended use.

PANDUIT

Panduit Corp., Tinley Park, IL USA
Technical Support: 888-506-5400, ext. 3255
Email: techsupport@panduit.com

Panduit Europe, Almelo, Netherlands
EMEA Service Center • Tel.: +31 546-580-452
EUR Email: emeatoolservicecenter@panduit.com


PANDUIT

STHV

PA19719A01
REV.: 06 11-2011

CABLE TIE INSTALLATION TOOL OPERATION INSTRUCTIONS

© Panduit Corp. 2011

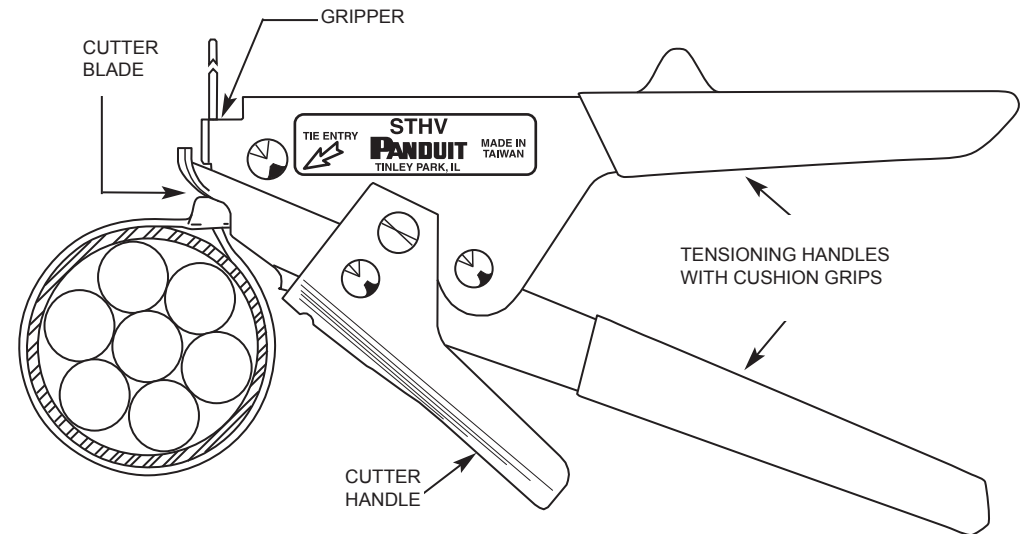

NOTE: This precision tool has been engineered and designed for use with Panduit nylon cable ties up to .35" wide. It is not intended for other uses such as cutting or tensioning wires or other types of fastening devices.

TOOL MAINTENANCE

This tool requires no special operator maintenance.

OPERATION INSTRUCTIONS

1. Loop cable tie around bundle as shown and insert tip up through head. Pull tie up snug on bundle by hand.
2. Place tool on tie as shown.
3. Squeeze tensioning handles as necessary to tighten tie to desired tension. (Do not overtighten tie.)
4. Release handle pressure to the minimum necessary to hold nose against tie head and squeeze cutter handle to cut off tail from tie.

TROUBLESHOOTING

If tie is breaking when applied, check to see that the ties are not being overly tightened.