



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

- ** 1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
- 2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
- 3. TERMINATED WITH (8 POSITION) SHIELDED MODULAR PLUGS ON BOTH ENDS PER T568A.
- 4. CONSTRUCTED WITH 26AWG STRANDED CAT5e F/UTP LSZH/CM PATCH CABLE. CABLE COLOR: INTERNATIONAL GRAY
- 5. MATERIAL:
 - PLUG: POLYCARBONATE
 - SHIELD: COPPER ALLOY NICKEL PLATED
 - BOOT: THERMOPLASTIC RESIN
 - CABLE: DUAL-RATED CM/LSZH
- 6. NOMINAL CABLE JACKET DIAMETER IS 0.205 IN (5.21MM).

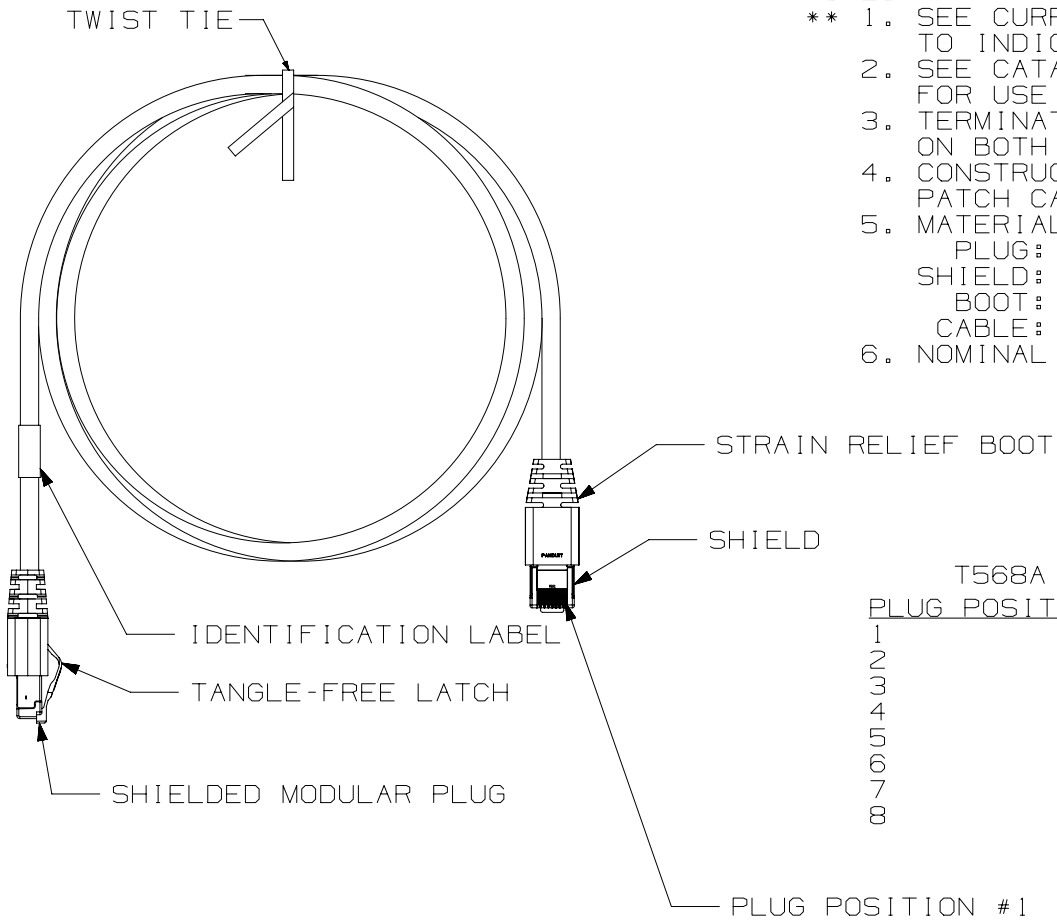

T568A WIRING SCHEME

PLUG POSITION:	CABLE WIRE:
1	WHITE/GREEN
2	GREEN
3	WHITE/ORANGE
4	BLUE
5	WHITE/BLUE
6	ORANGE
7	WHITE/BROWN
8	BROWN

SEE SHEET 2 FOR PATCH CORD LENGTHS AND PART NUMBERS

PART NUMBER		STPCHAAMB**	
TITLE		TX5e SHIELDED PATCH CORDS (CM/LSZH)	
CUSTOMER DRAWING			
ITEM REVISION NAME		M01895CB/00	
DATASET FILE NAME		M01895CB_DC07/00G	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.X ±		.XXX ±	
.XX ±		ANGLES ±	
DRAWING NUMBER:		01895-07	
DRAWN BY		SCALE	
BJN		NONE	
DATE		SHT 1 OF 1	
6-4-06		A	
CHK		SIZE	
EJH		A	
THIRD ANGLE PROJECTION			

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
6	4-12-16	BJN	MDJR	SASK	Q. REMOVED BROWN COLOR FROM PRODUCT OFFERING P. UPDATED TITLE BLOCK REVISED & REDRAWN PREVIOUS REVISIONS REMVD FOR CLARITY	01895-07

D10100DA/14

2

1


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

TX5e SHIELDED PATCH CORDS

PART NUMBER	LENGTH(MIN) ft(m)
STPCH0.5MB**	1.64ft (0.5m)
STPCH1MB**	3.28ft (1m)
STPCH1.5MB**	4.92ft (1.5m)
STPCH2MB**	6.56ft (2m)
STPCH2.5MB**	8.20ft (2.5m)
STPCH3MB**	9.84ft (3m)
STPCH4MB**	13.12ft (4m)
STPCH5MB**	16.40ft (5m)
STPCH6MB**	19.68ft (6m)
STPCH7MB**	22.97ft (7m)
STPCH8MB**	26.25ft (8m)
STPCH9MB**	29.53ft (9m)
STPCH10MB**	32.80ft (10m)
STPCH15MB**	49.21ft (15m)
STPCH20MB**	65.62ft (20m)
STPCH25MB**	82.02ft (25m)
STPCH30MB**	98.42ft (30m)
STPCH35MB**	114.83ft (35m)
STPCH40MB**	131.23ft (40m)

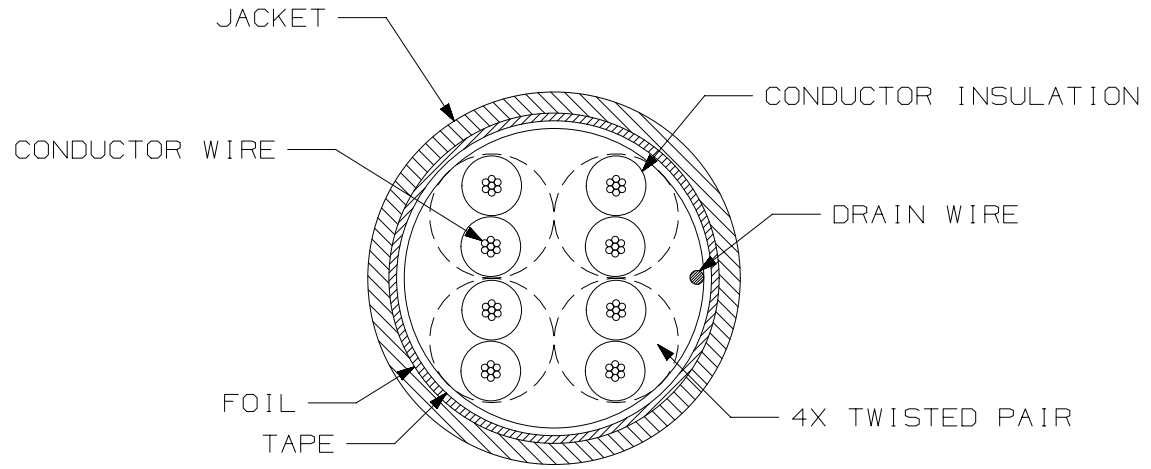

CROSS-SECTIONAL VIEW OF CABLE

BOOT COLORS	** = COLOR
BLACK	BL
BLUE	BU
RED	RD
YELLOW	YL
GREEN	GR

PART NUMBER		STPCHAAMB**	
TITLE			
TX5e SHIELDED PATCH CORDS (CM/LSZH)			
CUSTOMER DRAWING			
ITEM REVISION NAME		M01895CB/00	
DATASET FILE NAME		M01895CB_DC07/00G	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.X ±		.XXX ±	
.XX ±		ANGLES ±	
DRAWN BY		THIRD ANGLE PROJECTION	
BJN		EJH	
DATE		SCALE	
6-4-06		NONE	
CHK		DRAWING NUMBER:	
EJH		01895-07	
DATE		SHT 2 OF 2	
6-4-06		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
6	4-12-16	BJN	MDJR	SASK	SEE SHEET 1 FOR REVISION HISTORY	01895-07

D10100DA/14