

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SVC236

ON Semiconductor®

http://onsemi.com

Varactor Diode

Monolithic dual Varactor Diode for FM Tuning 16V, 50nA, CR=5.0, Q=70, CP

Features

- · Low voltage (6.5V)
- · Twin type varactor diode with good large-signal characteristics for FM receiver electronic tuning use
- · Very small package permits SVC236-applied sets to be compact and slim
- · Can be also provieded in tape reel package and automatic insertion is supported
- High capacitance ratio (V_R=1.0 to 6.5V)

Specifications


Absolute Maximum Ratings at Ta=25°C

| Parameter | Symbol | Conditions | Ratings | Unit |
|----------------------|--------|------------|-------------|------|
| Reverse Voltage | VR | | 16 | V |
| Junction Temperature | Tj | | 125 | °C |
| Storage Temperature | Tstg | | -55 to +125 | °C |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Package Dimensions

unit : mm (typ) 7013A-006



Product & Package Information

• Package : CP

• JEITA, JEDEC : SC-59, TO-236, SOT-23, TO-236AB

• Minimum Packing Quantity: 3,000 pcs./reel


Packing Type: TB

O O O

Marking



Electrical Connection




Electrical Characteristics at Ta=25°C


| Parameter | Symbol | Conditions | Ratings | | | Unit | |
|-----------------------------|-----------------|--|---------|-----|--------|-------|--|
| Farameter | Symbol | Conditions | min | typ | max | UIIIL | |
| Breakdown Voltage | V(BR)R | I _R =10μA | 16 | | | V | |
| Reverse Current | IR | V _R =10V | | | 50 | nA | |
| | C1V | V _R =1.0V, f=1MHz * | 92.07 | | 102.12 | pF | |
| Interterminal Capacitance * | C3.0V | V _R =3.0V, f=1MHz | 35.14 | | 41.98 | pF | |
| | C6.5V | V _R =6.5V, f=1MHz | 14.44 | | 16.84 | pF | |
| Quality Factor | Q | V _R =3.0V, f=100MHz | 70 | | | | |
| Capacitance Ratio | CR | C1.0V / C6.5V | 5.0 | | | | |
| Matching Tolerance | ΔC _m | V _R =1.0V, 3.0, 6.5, f=1MHz, (Cmax×Cmin) / Cmin×100 | | | 3.0 | % | |

Note) * : Capacitance value per each diode. * : 1MHz signal : 20mVnms

Ordering Information

| Device | Package | Shipping | memo | |
|-------------|---------|----------------|---------|--|
| SVC236-TB-E | СР | 3,000pcs./reel | Pb Free | |

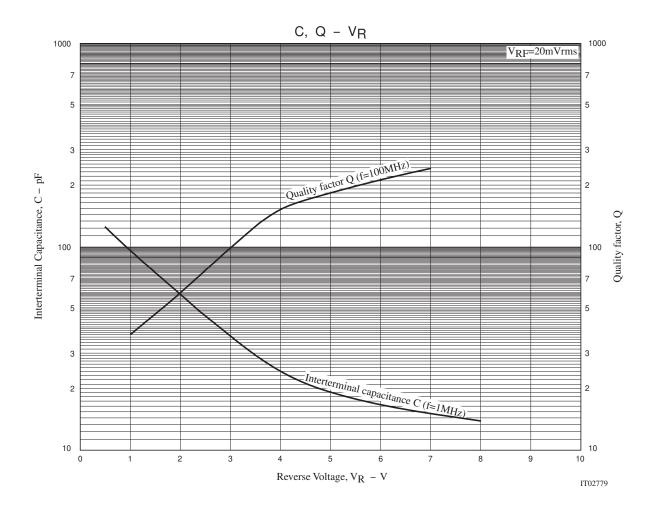

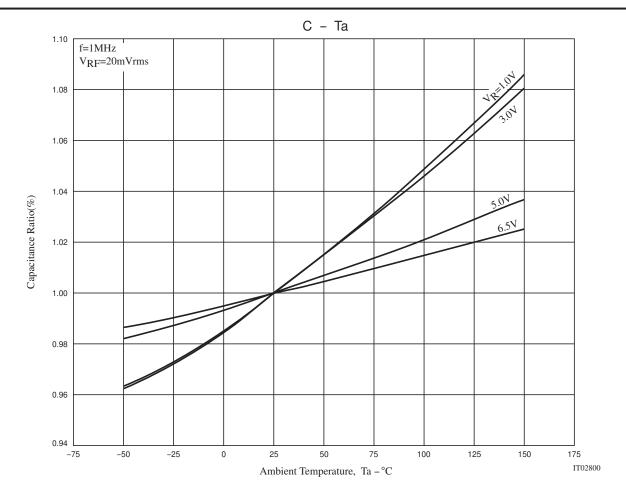


Taping Specification

SVC236-TB-E


1. Packing Format

| Package Name | Carrier Tape | Maximum Number of devices contained (pcs) | | | Packing format | | |
|--------------|--------------|---|-----------|-----------|--------------------------|--------------------------|--|
| | Туре | Reel | Inner box | Outer box | Inner $BOX(C-1)$ | Outer BOX (A-7) | |
| СР | СР | 3, 000 | 15, 000 | 90,000 | 5 reels contained | 6 inner boxes contained | |
| | | | | | Dimensions:mm (external) | Dimensions:mm (external) | |
| | | | | | 183×72×185 | 440×195×210 | |

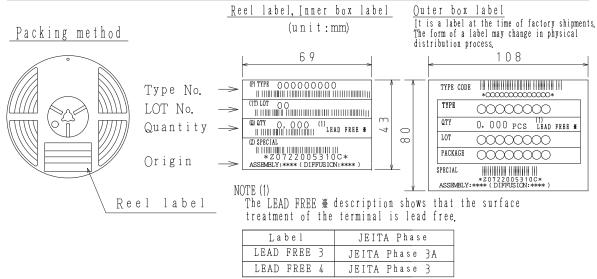


7. Taping configuration

2-1. Carrier tape size (unit:mm)

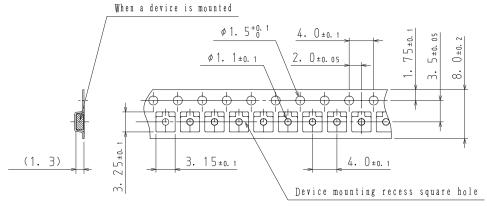

2-2. Device placement direction

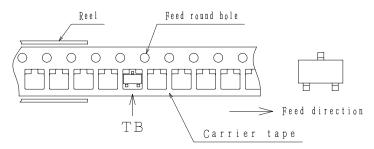


Those with one electrode terminal on the feed hole side·····TB

Outline Drawing

SVC236-TB-E

Mass (g) Unit 0.013 *For reference mm 0. 1+0. 1 0. 5+0. 25 2. 9±0.15 A 3 1. 5±0. 15 2. 5±0. 2 0. 5-0. 15 0. 95 0. 3±0.1 1, 1±0, 15 0. 05±0.05 *1:Lot indication

Land Pattern Example



ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa