



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# SINGLE WINDOW SINGLE MODE WIDEBAND FIBER COUPLER (980, 1310, S, C, L, AND C+L BAND)

## SWFC Series

### Product Description

The Oplink fused single window wideband fiber 1x2 (2x2) couplers provide accurate optical signal coupling and splitting over wide bandwidth with high performance and high reliability. These couplers have excellent uniformity, low excess loss and very low polarization sensitivity and are available with various tap ratios, wavelength ranges, fiber types, and connector options. All devices are shown to be able to handle high optical power up to 4W and are tested according to industry standard procedures. Reliability is guaranteed through stringent tests to fully meet Telcordia GR-1221 requirements.

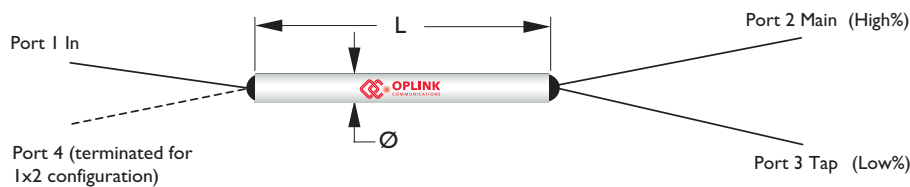

### Performance Specification

SWFC Series	980 nm	1310 nm	S Band	C Band	L Band	C+L Band	Unit
Wavelength Range	970 ~ 990	1270 ~ 1350	1420 ~ 1500	1530 ~ 1565	1570 ~ 1605	1530 ~ 1610	nm
Fiber Type	Corning HI980 Corning HI1060 OFS BF05635-02	Corning SMF-28					
Insertion Loss <sup>[1]</sup>	See Insertion Loss Table I, II, III						dB
Return Loss (Min)	55						dB
Directivity (Min)	55						dB
TDL <sup>[2]</sup> (Max)	Signal Path: <0.1dB, Tap Path: <0.15 dB						dB
Maximum Power Handling	4						W
Operating Temperature Range <sup>[3]</sup>	- 40 to + 75						°C
Storage Temperature Range	- 40 to + 85						°C
Package Dimensions **	P1: 250 μm bare fiber P2: 900 μm loose tube P3: 3mm cable		(Ø) 3.0 x (L) 47.0 (Ø) 3.0 x (L) 60.0 (L) 96.0 x (W) 12.0 x (H) 6.4				mm

Note:

[1] Values are referenced without connector loss.

[2] Temperature Sensitivity Coefficient ~0.002dB/°C at the range of -5 to 75°C.

[3] Operating temperature range changes to -5 to 75°C in P2, P3 package and all package with connectors

[4] The mechanical tolerance should be +/- 0.2 mm on all package dimensions unless otherwise custom specified.

### Features

- ◆ Wavelength Independent
- ◆ Low Insertion Loss and PDL
- ◆ High Power Handling
- ◆ Guaranteed Reliability

### Applications

- ◆ Signal monitoring in EDFA
- ◆ Network Monitoring
- ◆ CATV
- ◆ Local Area Networks
- ◆ Testing Instruments
- ◆ Laboratory R&D

Insertion Loss Tables

Insertion Loss (IL) I : C or L band coupler

Coupling Ratio	P Grade						A Grade					
	IL <sup>1</sup> (dB)		WDL <sup>2</sup> (dB)		PDL <sup>3</sup> (dB)		IL <sup>1</sup> (dB)		WDL <sup>2</sup> (dB)		PDL <sup>3</sup> (dB)	
	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap
99/1	≤0.20	19.0-21.0	≤0.08	≤0.50	≤0.04	≤0.12	≤0.20	17.7-21.5	≤0.10	≤0.55	≤0.05	≤0.15
98/2	≤0.25	16.4-18.4	≤0.10	≤0.40	≤0.04	≤0.12	≤0.30	16.0-19.4	≤0.10	≤0.45	≤0.05	≤0.15
97/3	≤0.30	14.6-16.2	≤0.10	≤0.30	≤0.04	≤0.12	≤0.35	14.0-16.8	≤0.10	≤0.40	≤0.05	≤0.15
95/5	≤0.35	12.4-13.8	≤0.12	≤0.25	≤0.04	≤0.10	≤0.40	12.0-14.4	≤0.12	≤0.30	≤0.05	≤0.15
90/10	≤0.60	9.60-10.8	≤0.12	≤0.22	≤0.05	≤0.10	≤0.65	9.20-11.2	≤0.13	≤0.26	≤0.06	≤0.14
85/15	≤0.85	7.80-8.80	≤0.15	≤0.20	≤0.05	≤0.10	≤0.90	7.5-9.0	≤0.15	≤0.25	≤0.06	≤0.14
80/20	≤1.15	6.60-7.60	≤0.15	≤0.20	≤0.05	≤0.10	≤1.15	6.4-8.0	≤0.16	≤0.23	≤0.07	≤0.13
75/25	≤1.35	5.75-6.50	≤0.15	≤0.20	≤0.06	≤0.10	≤1.44	5.6-6.7	≤0.16	≤0.22	≤0.07	≤0.13
70/30	≤1.75	5.00-5.50	≤0.15	≤0.20	≤0.06	≤0.10	≤1.82	4.9-5.8	≤0.16	≤0.20	≤0.08	≤0.12
65/35	≤2.10	4.40-4.90	≤0.15	≤0.20	≤0.07	≤0.10	≤2.15	4.3-5.0	≤0.16	≤0.20	≤0.08	≤0.12
60/40	≤2.50	3.95-4.30	≤0.15	≤0.20	≤0.07	≤0.09	≤2.60	3.7-4.6	≤0.17	≤0.20	≤0.08	≤0.10
55/45	≤2.85	3.35-3.80	≤0.15	≤0.20	≤0.07	≤0.09	≤2.90	3.1-4.0	≤0.17	≤0.20	≤0.09	≤0.10
50/50	2.80-3.30		≤0.20		≤0.08		2.70-3.30		≤0.22		≤0.10	

1. Insertion loss over operating wavelength range at ~23°C (excluding PDL and TDL).

2. Insertion loss change over the specified wavelength range.

3. Insertion loss change over the all input polarization states

Insertion Loss (IL) II : 1310nm, S<sup>2</sup> or C+L band coupler

Coupling Ratio	P Grade						A Grade					
	IL <sup>1</sup> (dB)		WDL <sup>2</sup> (dB)		PDL <sup>3</sup> (dB)		IL <sup>1</sup> (dB)		WDL <sup>2</sup> (dB)		PDL <sup>3</sup> (dB)	
	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap
99/1	≤0.20	18.2-21.0	≤0.09	≤0.90	≤0.04	≤0.15	≤0.23	17.4-21.5	≤0.10	≤1.20	≤0.05	≤0.20
98/2	≤0.25	16.0-18.6	≤0.09	≤0.80	≤0.04	≤0.12	≤0.30	15.2-19.8	≤0.11	≤1.00	≤0.05	≤0.15
97/3	≤0.30	14.4-16.4	≤0.10	≤0.70	≤0.04	≤0.12	≤0.34	13.7-17.1	≤0.12	≤0.90	≤0.05	≤0.15
95/5	≤0.40	12.2-14.0	≤0.13	≤0.60	≤0.04	≤0.10	≤0.40	11.8-14.7	≤0.15	≤0.80	≤0.05	≤0.15
90/10	≤0.65	9.40-11.0	≤0.15	≤0.50	≤0.05	≤0.10	≤0.65	9.00-11.3	≤0.16	≤0.60	≤0.06	≤0.15
85/15	≤0.95	7.70-8.85	≤0.15	≤0.45	≤0.05	≤0.10	≤0.85	7.4-9.1	≤0.18	≤0.67	≤0.06	≤0.15
80/20	≤1.20	6.30-7.80	≤0.17	≤0.40	≤0.05	≤0.10	≤1.15	6.0-8.1	≤0.20	≤0.55	≤0.07	≤0.14
75/25	≤1.60	5.45-6.70	≤0.18	≤0.40	≤0.06	≤0.10	≤1.44	5.4-6.8	≤0.20	≤0.53	≤0.07	≤0.14
70/30	≤1.80	4.60-5.75	≤0.22	≤0.40	≤0.06	≤0.10	≤1.82	4.6-5.9	≤0.25	≤0.50	≤0.08	≤0.13
65/35	≤2.10	4.10-5.05	≤0.23	≤0.38	≤0.07	≤0.10	≤2.15	4.2-5.0	≤0.30	≤0.50	≤0.08	≤0.13
60/40	≤2.55	3.85-4.40	≤0.25	≤0.35	≤0.07	≤0.09	≤2.60	3.7-4.6	≤0.35	≤0.48	≤0.09	≤0.11
55/45	≤2.90	3.15-3.85	≤0.30	≤0.35	≤0.07	≤0.09	≤2.81	3.1-4.0	≤0.40	≤0.48	≤0.09	≤0.11
50/50	2.70-3.40		≤0.35		≤0.08		2.60-3.50		≤0.40		≤0.10	

1. Insertion loss over operating wavelength range at ~23°C (excluding PDL and TDL). For S-band product, add 0.1dB due to water absorption peak of fiber.

2. Insertion loss change over the specified wavelength range. For S-band product, add 0.1dB in WDL due to water absorption peak of fiber.

3. Insertion loss change over the all input polarization states.

**SWFC SERIES**
**Insertion Loss (IL) III : 980nm coupler**

Coupling Ratio	P Grade						A Grade					
	IL <sup>1</sup> (dB)		WDL <sup>2</sup> (dB)		PDL <sup>3</sup> (dB)		IL <sup>1</sup> (dB)		WDL <sup>2</sup> (dB)		PDL <sup>3</sup> (dB)	
	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap	Signal	Tap
99/1	≤0.20	18.5-21.0	≤0.10	≤1.00	≤0.05	≤0.12	≤0.25	15.5-21.5	≤0.15	≤1.20	≤0.07	≤0.15
98/2	≤0.27	15.7-18.9	≤0.15	≤1.00	≤0.05	≤0.12	≤0.32	14.8-19.8	≤0.20	≤1.15	≤0.07	≤0.15
97/3	≤0.33	13.9-16.9	≤0.17	≤1.00	≤0.05	≤0.12	≤0.37	13.2-17.7	≤0.22	≤1.15	≤0.07	≤0.15
95/5	≤0.38	11.4-14.8	≤0.20	≤0.90	≤0.05	≤0.12	≤0.50	11.2-15.2	≤0.25	≤1.10	≤0.07	≤0.15
90/10	≤0.60	9.20-11.3	≤0.25	≤0.70	≤0.07	≤0.12	≤0.70	8.70-11.7	≤0.35	≤0.75	≤0.10	≤0.15
85/15	≤1.00	7.40-9.00	≤0.25	≤0.65	≤0.10	≤0.12	≤1.20	7.00-9.60	≤0.35	≤0.75	≤0.10	≤0.15
80/20	≤1.30	5.70-7.90	≤0.25	≤0.60	≤0.10	≤0.12	≤1.50	5.40-8.50	≤0.35	≤0.75	≤0.10	≤0.15
75/25	≤1.65	5.10-6.80	≤0.30	≤0.55	≤0.10	≤0.10	≤1.85	4.80-7.30	≤0.40	≤0.70	≤0.10	≤0.15
70/30	≤1.90	4.30-6.00	≤0.35	≤0.50	≤0.10	≤0.10	≤2.20	4.20-6.40	≤0.45	≤0.65	≤0.10	≤0.15
65/35	≤2.10	3.75-5.35	≤0.35	≤0.45	≤0.10	≤0.10	≤2.40	3.50-5.60	≤0.45	≤0.60	≤0.10	≤0.15
60/40	≤2.60	3.40-4.70	≤0.35	≤0.40	≤0.10	≤0.10	≤2.80	3.20-4.70	≤0.45	≤0.55	≤0.10	≤0.15
55/45	≤2.90	2.85-4.10	≤0.35	≤0.35	≤0.10	≤0.10	≤2.95	3.05-4.25	≤0.45	≤0.50	≤0.10	≤0.15
50/50	2.70-3.40		≤0.30		≤0.10		2.60-3.60		≤0.45		≤0.15	


1. Insertion loss over operating wavelength range at ~23°C (excluding PDL and TDL).

2. Insertion loss change over the specified wavelength range.

3. Insertion loss change over the all input polarization states.

**Ordering Information**

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

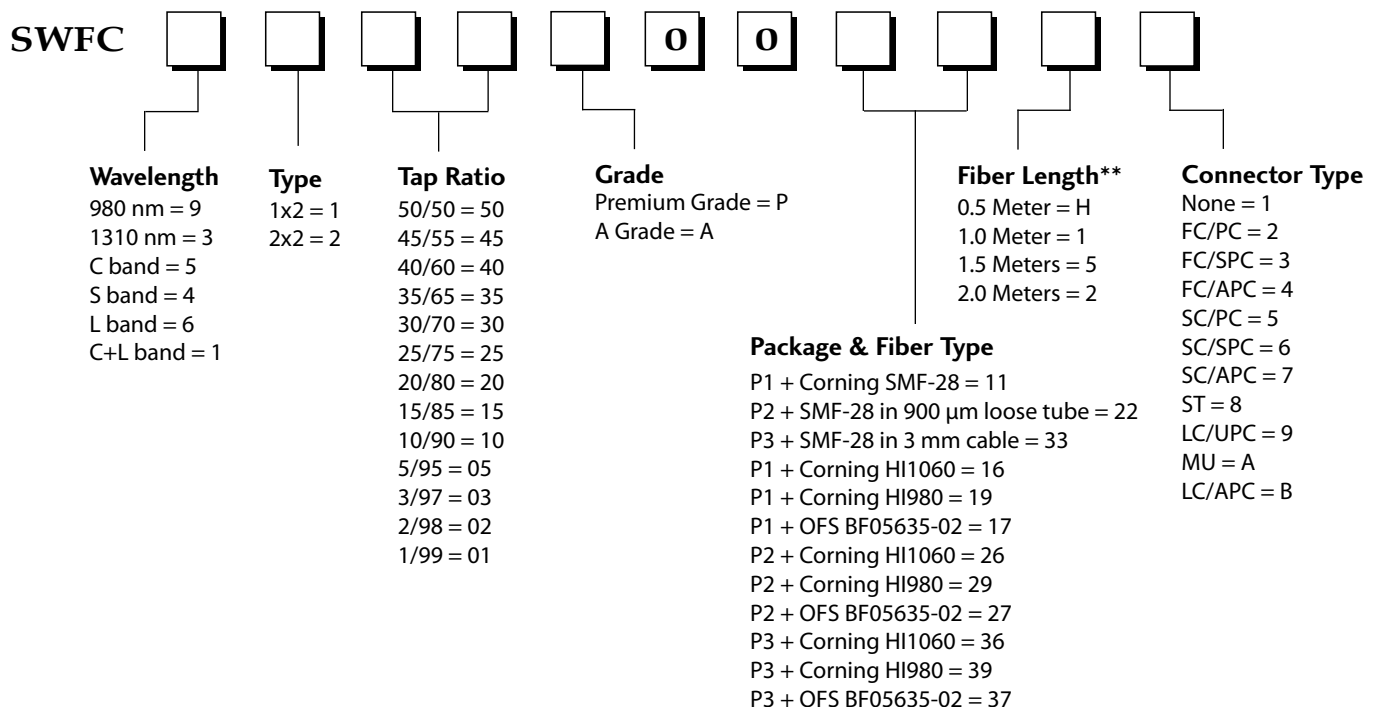

Notes :

\* For HI1060, HI980 and OFS BF05635-02 fiber type, the Connector Option is None.

\*\* The tolerance of fiber length is +/-0.1m. 1 meter is standard. The lead time for special fiber length will be longer.