



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Toggle

SINGLE POLE



SX0790

- 6.3mm tabs or Screw Terminals
- 10A, 250V a.c.

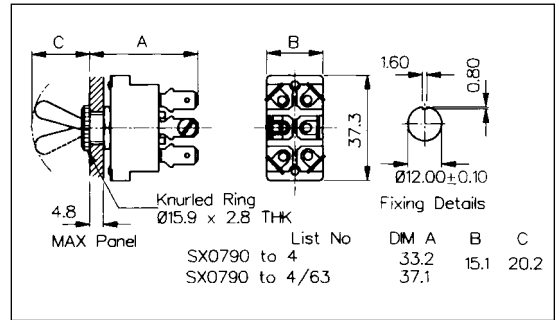

Single Pole List No.	Description	1	2	3
SX0790	Change-over. Centre off	ON	OFF	ON
SX0791	Change-over. Centre off One position biased off	ON	OFF	ON
SX0792	Change-over. Centre off Two position biased off	ON	OFF	ON
SX0793	Change-over Two positions only	ON	-	ON
SX0794	ON/OFF Two positions only	OFF	-	ON


Specification	SX0790 Series
Terminations:	Screw Terminals
Switching:	See table for types Slow Make, Slow Break
Max. Rating:	10A, 250V a.c. 10A, 0-28V d.c. (non-reactive circuits)
Contact Resistance:	<10mΩ
Insulation Resistance:	>10 ³ MΩ
Dielectric Strength:	>2.5kV a.c.
Operating Temp. Range:	-20°C to +85°C
Materials:	
Mouldings:	Glass Filled Polyester
Tags:	Brass, Silver Plated
Contacts:	Copper with Silver face
Variants:	/63 (6.3mm tabs) - (except SX0791)
Accessories:	SX0550 (see page 195)
RoHS	Compliant

Toggle

DOUBLE POLE



- 6.3mm tabs or Screw Terminals
- 10A, 250V a.c.

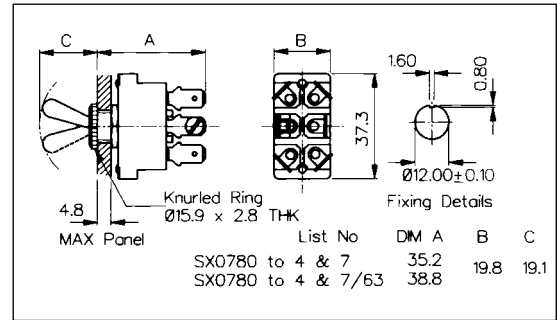

Double Pole List No.	Description	1	2	3
SX0780	Change-over. Centre off	ON	OFF	ON
SX0782	Change-over. Centre off Two position biased off	ON	OFF	ON
SX0783	Change-over Two positions only	ON	-	ON
SX0784	ON/OFF Two positions only	OFF	-	ON
SX0787	Change-over. Two positions only biased to one position	ON	-	ON

Specification	SX0780 Series
Terminations:	Screw Terminals
Switching:	See table for types Slow Make, Slow Break
Max. Rating:	10A, 250V a.c. 10A, 0-28V d.c. (non-reactive circuits)
Contact Resistance:	<10mΩ
Insulation Resistance:	>10 ³ MΩ
Dielectric Strength:	>2.5kV a.c.
Operating Temp. Range:	-20°C to +85°C
Materials:	
Mouldings:	Glass Filled Polyester
Tags:	Brass, Silver Plated
Contacts/Terms:	Copper with Silver face
Variants:	/63 (6.3mm tabs)
Accessories:	SX0550 (see page 195)
RoHS	Compliant