



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Weller Rework Systems

Perfect Performance

Weller[®]

APPLICATION FLEXIBILITY. PRODUCTIVITY. PROCESS CONTROL.



WR3M



Application flexibility.

400 watts of power over 3 independently-controlled channels

Application flexibility with up to 21 tool options

Up to 200 watts of hot air power for efficient lead-free rework

Up to 120 watts of desoldering power for demanding ground plane and multi-layer boards

Up to 200 watts of soldering power for unmatched application versatility

Peripheral control and connectivity to low voltage pre-heating plates and soldering baths

Productivity.

System operational right out of the box with all critical components and tips supplied

Less than 5 seconds hot air time to temperature performance

Continuous productivity with no end of cycle hot air cool down time

Unmatched tool air flow volume of 1-15 L/Min

Sustainability of new tool developments with field accessible firmware update port

No system cooling requirements ensures lowest operational costs

Large, intuitive LCD display shows critical functions for all 3 channels

Rotary vane vacuum pump for long life and quiet operation

Process control.

Included PC software enables PC connectivity and data logging capabilities

Temperature stability of $\pm 2^{\circ}\text{C}$ / $\pm 4^{\circ}\text{F}$ for superior reliability

ESD safe, meets or exceeds MIL-STD and J-STD 001E industry specifications



WR2



ESD



Save Energy

WR3M



1 2 3 4 5 6 7 8

Maximum power supply 400W

1

Active Tip



WMPRMS
RTMS Soldering tips
Order number: T0052919299



WMRTMS
RTWMS Tips
Order number: T0051317599

2

Power-Response



WP65
XNT tips
Order number: T0052921599



WP120
XT tips
Order number: T0052919399



WP200
XHT tips
Order number: T0052919999

NEW

3

Standard-Line



WTA50
WTA Tips
Order number: T0051317199

4

Silver-Line



WP80/WSP80
LT Soldering tips
Order number:
T0052918099 (WP80)
Order number:
WSP80 (WSP80)



WSP150
LHT Soldering tips
Order number: T0052917099

8

Accessory



WVP
Order number: T0052918499

6

Accessory



WRK
Order number: T0051515599

See pages 13-29 for order information.

WR3ME



1 2 3 4 5 6 7

Maximum power supply 400W

WR2



2 3 4 5 7

Maximum power supply 300W

7

Desoldering Iron



DXV80
DX Tiplets

Order number: T0051318099



DSX80
DX Tiplets

Order number: T0051319099



DSX120
XDS/XDSL Tiplets

Order number: T0051319899

NEW

5

Tip Extraction Iron



FE75
LT Soldering tips

Order number: T0052916699

6

Hot Air Iron



HAP200
HAP hot air nozzles

Order number: T0052711699

5



HAP1
HAP Hot air Tiplets

Order number: T0052711899

5

Preheating Plate



WHP80

Order number: T0052702899
24v/80 watts

5

Solder Bath



WSB80

Order number: T0052704099
24v/80 watts



WSB150

Order number: T0052704299
24v/150 watts

TECHNICAL DATA



WR3M



WR3ME



WR2

Dimension L x W x H	273 x 235 x 102 mm (10.75 x 9.25 x 4.02 in)		
Weight:	6.7 kg (14.77 lbs)	6.7 kg (14.77 lbs)	6.3 kg (13.9 lbs)
Channels	3	3	2
Wattage	400W	400W	300W
Power supply	120V, 60Hz		
Fuse	T500 mA (120V / 50/60 Hz)		
Fuse: overcurrent release	2 A	2 A	1.6 A
Temperature control of channels	<p>Soldering and desoldering irons continuously 50°C - 550°C (150°F - 999°F)</p> <p>Note: Temperature control range depends on tool</p> <p>Soldering iron WP80 / WP120: 50°C - 450°C (150°F - 850°F)</p> <p>Soldering iron WP200 / WSP150: 50°C - 550°C (150°F - 950°F)</p> <p>Soldering iron WMRT / WMRP (only WR3M/WR3ME): 100°C - 450°C (200°F - 850°F)</p> <p>Desoldering iron DSX80 / DXV80: 50°C - 450°C (150°F - 850°F)</p> <p>Desoldering iron DSX120: 50°C - 450°C (150°F - 850°F)</p> <p>Hot air irons HAP200 (only WR3M/WR3ME) / HAP 1: 50°C - 550°C (150°F - 950°F)</p>		
Temperature accuracy	± 9°C (± 17°F)		
Temperature stability	± 2°C (± 4°F)		
Tip-to-ground resistance	Meets or exceeds MIL-STD 2000/IPC/J-STD001E		
Tip-to-ground voltage	Meets or exceeds MIL-STD 2000/IPC/J-STD001E		
Pump	(periodic duty 30/30 s)		
Max. vacuum	0.7 bar / 20Hg		
Max. delivery rate	Max. 18 l/min		
Hot Air	Max. 15 l/min		
Display	LCD with backlight		
Temperature control	Station programmable buttons		
ESD safe	Yes		
USB interface	Yes	Yes	No
Order number:	WR3M	WR3ME	WR2

WR5000M NEW

- 700 watts of power over 5 independently-controlled channels
- Specified tips included
- Application flexibility with up to 19 tool options (WR3ME only)
- PC Connectivity and data logging software included (WR3ME only)

Note: Not applicable with WRK kit or WVP vacuum



Order Number	Model Number	Description	Power	
	WR5000M	Five-channel, hot air, desoldering, soldering rework system	700W	
1	WR3ME	Power unit, 400w, 120v		
2	WR2	Power unit, 300w, 120v		
3	T0052921599	WP65	Soldering iron, 24v	65W
4	T0051512199	WDH10	Safety rest for WP65	
	T0054485199	XNTA	Soldering tip for WP65	
5	T0052919299	WMRPMS	Soldering iron, 12v (For use with WR3ME only)	55W max
6	T0051515699	WDH50	Safety rest for WMRPMS	
	T0054460373	RT3MS	Soldering tip for WMRPMS	
7	T0051319899	DSX120	Desoldering iron, 24v	120W
8	T0051515299	WDH30	Safety rest for DSX120	
	T0051325099	XDS1	Desoldering tip for DSX120	
9	T0051317599	WMRTMS	Soldering tweezer, 12v (For use with WR3ME only)	80W
10	T0051514699	WMRTH	Safety rest for WMRTMS	
	T0054465799	RTW2MS	Soldering tip set for WMRTMS	
11	T0052711699	HAP200	Hot air pencil, 24v (For use with WR3ME port 1 only)	200W
12	T0051515299	WDH30	Safety rest for HAP200	
	T0058727821	R04	Hot air nozzle for HAP200	
	T0058727822	R06	Hot air nozzle for HAP200	
Total tool power			520W	

WR3000MER NEW

- 400 watts of power over 3 independently-controlled channels
- Specified tips included
- Application flexibility with up to 19 tool options
- PC Connectivity and data logging software included

Note: Not compatible with WRK kit or WVP vacuum pencil.



Order Number	Model Number	Description	Power
T0053368270	WR3000MER	WR3ME multi-channel, hot air, desoldering, soldering rework system	400W
1	WR3ME	WR3ME	Power unit, 400w, 120v
2	T0052914399	WP120	Soldering iron, 24v
3	T0051512199	WDH10	Safety rest for WP120
	T0054470499	XTB	Soldering tip for WP120
4	T0051319899	DSX120	Desoldering iron, 24v
5	T0051515299	WDH30	Safety rest for DSX120
	T0051325099	XDS1	Desoldering tiplet for DSX120
6	T0052711699	HAP200	Hot air pencil, 24v
7	T0051515299	WDH30	Safety rest for HAP200
	T0058727821	R04	Hot air nozzle for HAP200
	T0058727822	R06	Hot air nozzle for HAP200
Total tool power			440W

WR3000M

- 400 watts of power over 3 independently-controlled channels
- Specified tips included
- Application flexibility with up to 21 tool options
- PC Connectivity and data logging software included



Order Number	Model Number	Description	Power
WR3000M	WR3000M	WR3M multi-channel, hot air, desoldering, soldering rework system	400W
1	WR3M	WR3M	Power unit, 400w, 120v
2	T0052918099	WP80	Soldering iron, 24v
3	T0051516199	WDH10T	Safety rest for WP80
	LTB	LTB	Soldering tip for WP80
4	T0051318099	DXV80	Desoldering iron, 24v
5	T0051515399	WDH40	Safety rest for DXV80
	T0051314299	DX112	Desoldering tiplet for DXV80
	T0051314399	DX113	Desoldering tiplet DXV80
6	T0052711699	HAP200	Hot air pencil, 24v
7	T0051515299	WDH30	Safety rest for HAP200
	T0058727821	R04	Hot air nozzle for HAP200
	T0058727822	R06	Hot air nozzle for HAP200
8	T0052918499	WVP	Vacuum pick-up pen
Total tool power			360W

WR3000SA NEW

- 400 watts of power over 3 independently-controlled channels
- Specified tips included
- Application flexibility with up to 19 tool options
- PC Connectivity and data logging software included

Note: Not compatible with WRK kit or WVP vacuum pencil.



Order Number	Model Number	Description	Power
WR3000SA	WR3000SA	WR3ME multi-channel, hot air, desoldering, soldering rework system	400W
1	WR3ME	Power unit, 400w, 120v	
2	T0052918099	WP80 Soldering iron, 24v	80W
3	T0051516199	WDH10 Safety rest for WP80	
	LTB	LTB Soldering tip for WP80	
4	T0051318099	DXV80 Desoldering iron, inline, 24v	80W
5	T0051515399	WDH40 Safety rest for DXV80	
	T0051314299	DX112 Desoldering tip for DXV80	
	T0051314399	DX113 Desoldering tip for DXV80	
6	T0052711699	HAP200 Hot air pencil, 24v	200W
7	T0051515299	WDH30 Safety rest for HAP200	
	T0058727821	R04 Hot air nozzle for HAP200	
	T0058727822	R06 Hot air nozzle for HAP200	
Total tool power			360W

WR3000TA NEW

- 400 watts of power over 3 independently-controlled channels
- Specified tips included
- Application flexibility with up to 21 tool options
- PC Connectivity and data logging software included

Note: Not compatible with WRK kit or WVP vacuum pencil.



Order Number	Model Number	Description	Power
WR3000TA	WR3000TA	WR3ME multi-channel, hot air, desoldering tweezers, soldering rework system	400W
1	WR3ME	power unit, 400w, 120v	
2	T0052918099	WP80 Soldering iron, 24v	80W
3	T0051516199	WDH10 Safety rest for WP80	
	LTB	LTB Soldering tip for WP80	
4	T0051317599	WMRTMS Soldering tweezer, 12v	80W
5	T0051514699	WMRTH Safety rest for WMRTMS	
	T0054465799	RTW2MS Soldering tip set for WMRTMS	
6	T0052711699	HAP200 Hot air pencil, 24v	200W
7	T0051515299	WDH30 Safety rest for HAP200	
	T0058727821	R04 Hot air nozzle for HAP200	
	T0058727822	R06 Hot air nozzle for HAP200	
Total tool power			360W

WR3000SS NEW

- 400 watts of power over 3 independently-controlled channels
- Specified tips included
- Application flexibility with up to 19 tool options
- PC Connectivity and data logging software included



Note: Not compatible with WRK kit or WVP vacuum pencil.

Order Number	Model Number	Description	Power
WR3000SS	WR3000SS	WR3ME multi-channel, desoldering, soldering rework system	400W
1	WR3ME	WR3ME	
2	T0052918099	WP80	80W
3	T0051316199	WDH10	
	LTB	LTB	
4	T0052918099	WP80	80W
5	T0051516199	WDH10	
	LTB	LTB	
6	T0051318099	DXV80	80W
7	T0051515399	WDH40	
	T0051314299	DX112	
	T0051314344	DX113	
Total tool power			240W

WR3000TS NEW

- 400 watts of power over 3 independently-controlled channels
- Specified tips included
- Application flexibility with up to 19 tool options
- PC Connectivity and data logging software included



Note: Not compatible with WRK kit or WVP vacuum pencil.

Order Number	Model Number	Description	Power
WR3000TS	WR3000TS	WR3ME multi-channel, desoldering, soldering rework system	400W
1	WR3ME	WR3ME	
2	T0052919299	WMPMS	55W (max)
3	T0051515699	WDH50	
	T0054460373	RT3MS	
4	T0051318099	DXV80	80W
5	T0051515399	WDH40	
	T0051314299	DX112	
	T0051314399	DX113	
6	T0051317599	WMRTMS	80W
7	T0051514699	WMRTH	
	T0054465799	RTW2MS	
Total tool power			215W

WR2000ER NEW

- 300 watts of power over 2 independently-controlled channels
- Specified tips included
- Application flexibility with up to 15 tool options

Note: Not compatible with micro tools, WMRP/WMRPMS, WMRT/WMRTMS or HAP200, WVP, WRK tools



Order Number	Model Number	Description	Power
WR2000ER	WR2000ER	WR2 multi-channel, desoldering, soldering rework system	300W
1	WR2	Power unit, 300w, 120v	
2	T0052921599	WP65	65W
3	T0051512199	WDH10	
	T0054485199	XNTA	
4	T0051319899	DSX120	120W
5	T0051515299	WDH30	
	T0051325099	XDS1	
Total tool power			185W

WR2000VX

- 300 watts of power over 2 independently-controlled channels
- Specified tips included
- Application flexibility with up to 15 tool options

Note: Not compatible with micro tools, WMRP/WMRPMS, WMRT/WMRTMS, or HAP200, WVP, WRK tools



Order Number	Model Number	Description	Power
WR2000VX	WR2000VX	WR2 multi-channel, desoldering, soldering rework system	300W
1	WR2	Power unit, 300w, 120v	
2	WSP80	WSP80	80W
3	T0051512199	WDH10	
	LTB	LTB	
4	T0051318099	DXV80	80W
5	T0051515399	WDH40	
	T0051314299	DX112	
Total tool power			160W

WR2000

- 300 watts of power over 2 independently-controlled channels
- Specified tips included
- Application flexibility with up to 15 tool options

Note: Not compatible with micro tools, WMRP/WMRPMS, WMRT/WMRTMS, or HAP200, WVP, WRK tools



Order Number	Model Number	Description	Power
WR2000	WR2000	WR2 multi-channel, hot air rework system	300W
1 WR2	WR2	Power unit, 300w, 120v	
2 T0052711899	HAP1	Hot air set w/WDH30 safety rest	100W
T0058727821	R04	Hot air nozzle for HAP1	
Total tool power			100W

WR2000X

- 300 watts of power over 2 independently-controlled channels
- Specified tips included
- Application flexibility with up to 15 tool options

Note: Not compatible with micro tools, WMRP/WMRPMS, WMRT/WMRTMS, or HAP200, WVP, WRK tools



Order Number	Model Number	Description	Power
WR2000X	WR2000X	WR2 multi-channel, desoldering rework system	300W
1 WR2	WR2	Power unit, 300w, 120v	
2 T0051318099	DXV80	Desoldering iron, 24v	80W
3 T0051515399	WDH40	Safety rest for DXV80	
T0051314299	DX112	Desoldering triplet for DXV80	
Total tool power			80W



WMRP/WMRP-MS

Ideal for microscope work; highest performance via active soldering tip; cartridge type tip.

Fastest heat up and recovery on the market
 Excellent reaction time with finest tips
 Optimal for soldering under microscope
 Rapid hot tip-change; no tool required


55W Max, 12V

WMRP	T0052917199	Pencil, no tip
WMRPMS	T0052919299	Pencil, no tip
RT3MS	T0051515699	Tip
WDH50	T0051515699	Stand

WMRPSET
 WMRP Pencil, RT3 tip + WDH50 stand
 T0052919099



CHISEL



RT	Ø a mm	b mm	Order number
RT 1SC	0.4	0.15	T0054461299
RT 1SCNW*	0.3	0.1	T0054462699
RT 3	1.3	0.4	T0054460399
RT 4	1.5	0.4	T0054460499
RT 8	2.2	0.4	T0054460899
RT 9	0.8	0.4	T0054460999
RT 11	3.6	0.9	T0054461199
RT 5 30°	0.8	0.4	T0054460599

RT-MS	Ø a mm	b mm	Order number
RT 1SCMS	0.4	0.15	T0054461599
RT 1SCNWMS*	0.3	0.1	T00544626 71
RT 3MS	1.3	0.4	T0054461699
RT 4MS	1.5	0.4	T0054461899
RT 8MS	2.2	0.4	T0054462299
RT 9MS	0.8	0.4	T0054462399
RT 11MS	3.6	0.9	T0054463199
RT 5MS 30°	0.8	0.4	T0054461999
RT 3XMS 30°	1.3	0.5	T00544603 73

SLOPED




Type	a mm	Order number
RT 6 45°	1.2	T0054460699

Type	a mm	Order number
RT 6MS 45°	1.2	T0054462099

MS tips: separate ground

* non wettable




CONICAL



RT		Ø a mm	Order number
RT 1		0.2	T0054460199
RT 1NW*		0.1	T0054462599
RT 2		0.8	T0054460299
RT 15		.75	T0054460271
RT 14		0.4	T0054460171

RT-MS		Ø a mm	Order number
RT 1MS		0.2	T0054461499
RT 1NWMS*		0.1	T0054462571
RT 2MS		0.8	T0054461799
RT 12MS 25°		0.5	T0054463299
RT 13MS 30°		0.4	T0054463399
RT 14MS		0.4	T0054460173
RT 15MS		.75	T0054460273

GULL WING



Type	Ø a mm	b mm	Order number
RT10GW	1.2	2.0	T0054461099

Type	Ø a mm	b mm	Order number
RT10GWMS	1.2	2.0	T0054462499

KNIFE



Type	Ø a mm	Order number
RT 7 45°	2.2	T0054460799

Type	Ø a mm	Order number
RT 7MS 45°	2.2	T0054462199

MS tips: separate ground

MEASURING TIP

Type	Order number
RT Measuring Tip	K1101
RTMS Measuring Tip	K1151

* non-wettable



WMRT/WMRT-MS

Ultra slim tweezers; ideal for soldering and desoldering very small SMD components; cartridge type tips.

Fastest heat up and recovery on the market
Excellent reaction time with finest tips
Optimal for soldering under microscope
Rapid hot tip-change; no tool required

2 x 40W, 12V




WMRT T0051317299
WMRT-MS T0051317599
RTW2-MS T0054465899
WMRTH T0051514699

Tweezer, RTW2 tip
Tweezer, no tip
Tip cartridge
Stand

WMRTSET
WMRT tweezer, RTW2 tip, WMRTH stand
T0051317399




CHISEL



RTW	Ø a mm	b mm	Order number
RTW 2 45°	0.7	0.4	T0054465299
RTW 3 45°	3.0	1.0	T0054465399
RTW 4 45°	6.0	1.0	T0054465499
RTW 9	3.0	1.0	T0054466699 NEW
RTW 11	6.0	1.0	T0054466799 NEW
RTW10	10.0	1.0	T0054466899 NEW
RTW 8	1.3	0.4	T0054466499 NEW

RTW-MS	Ø a mm	b mm	Order number
RTW 2MS45°	0.7	0.4	T0054465799
RTW 3MS 45°	3.0	1.0	T0054465899
RTW 4MS 45°	6.0	1.0	T0054465999
RTW 9MS	3.0	1.0	T0054466999 NEW
RTW 11MS	6.0	1.0	T0054467099 NEW
RTW10MS	10.0	1.0	T0054467199 NEW
RTW 8MS	1.3	0.4	T0054466599 NEW
RTW 7NWMS*	0.8	0.4	T0054466371 NEW

CONICAL



Type	Ø a mm	Order number
RTW 1 45°	0.4	T0054465199
RTW 6NW* 45°	0.2	T0054465699

Type	Ø a mm	Order number
RTW 1MS 45°	0.4	T0054465599
RTW 6NWMS* 45°	0.2	T0054465671

* non wettable

MS tips: separate ground



WP65

Perfect choice where Active-Tip above lacks sufficient power; lower cost, non-cartridge style tips.

- Maximum power and rapid response
- Optimized sensor position
- Energy saving performance

65W, 24V



WP65


T0052921599

Pencil, XNTA tip

WP65SET
WP65 pencil with WDH10 stand
T0052921699



CHISEL



XNT	Ø a mm	b mm	c mm	Order number
XNT 1SCNW*	0.3	0.1	27.0	T0054488199
				NEW
XNT 1SC	0.4	0.15	27.0	T0054486299
XNT H	0.8	0.4	28.0	T0054485999
XNT K	1.2	0.4	28.0	T0054486099
XNT A	1.6	0.4	28.0	T0054485199
XNT 6	1.6	0.4	29.5	T0054485699
XNT B	2.4	0.8	27.0	T0054485799

Type	Ø a mm	b mm	c mm	Order number
	3.2	0.8	27.0	T0054485899
	4.0	0.8	28.0	T0054485399
	0.8	0.4	36.5	T0054487399
	1.2	0.4	34.6	T0054487499
	1.6	0.8	28.0	T0054486499
	2.4	0.8	36.5	T0054488299
	3.2	0.8	37.5	T0054488399

SLOPED




Type	a mm	Order number
	1.2	T0054485599
	1.6	T0054488499
	2.4	T0054488599

Type	a mm	Order number
	3.2	T0054488699
	1.2	T0054488799

* non-wettable

CONICAL



XNT	Ø a mm	c mm	Order number
XNT 1 	0.5	27.0	T0054485099
XNT 1L 	0.2	42.8	T0054487199


Type	Ø a mm	c mm	Order number
XNT S 	0.4	37.5	T0054486899

KNIFE



Type	Ø a mm	c mm	Order number
XNT KN 	2.0	33.0	T0054486399


GULL WING



Type	b mm	c mm	Order number
XNT GW 45° 	2.0	33.0	T0054485499

Type	b mm	c mm	Order number
XNT GW 1 45° 	1.5	27.5	T0054488099 NEW

ROUND



Type	Ø a mm	c mm	Order number
XNT 1S 	0.2	28.5	T0054485299
XNT AS 	1.6	29.5	T0054486999
XNT L 	2.0	37.5	T0054486699
XNT CS 	3.2	29.5	T0054487099

Type	Ø a mm	c mm	Order number
XNT M 	3.2	37.5	T0054486799
XNT 1LX 45° 	0.2	36.5	T0054487299
XNT 1X 45° 	0.4	28.0	T0054486599
XNT 1SLX 45° 	0.4	39.5	T0054487599

SMT

Type	Ø a mm	b mm	c mm	Order number
XNT SMT 01 	10.4	0.6	7.1	T0054487699
XNT SMT 02 	16.8	0.6	7.1	T0054487799

Type	Ø a mm	b mm	c mm	Order number
XNT SMT 03 	20.8	0.6	7.1	T0054487899

ACCESSORIES

Type	Ø a mm	c mm	Order number
Measuring tip WP65			K1131
XNT Screw M4 		26.0	T0054487999

Type	Order number
Barrel 	T0058765758
Barrel for bent tips 	T0058765767

* non wettable



WSP80/WP80

Universal SMD and THT applications both small and large;
lowest cost, non-cartridge style tips in entire range.

Effective heat transfer via best material silver core
Fast ramp up and recovery
Designed for universal applications

80W, 24V




WSP80	WSP80	Pencil, LTB tip
WP80	T0052918099	Pencil, LTB tip
MPR80SET	T0053313199	Pencil, LTH tip, KH25P stand

WP80SET
WP80 pencil, LTB tip, WDH stand
T0052918199




CHISEL



LT	Ø a mm	b mm	c mm	Order number
LT 1SC	0.4	0.15	15.0	T0054449499
LT 1SCNW*	0.3	0.1	15.0	T0054449799
LT A	1.6	0.7	12.5	LT A
LT ASL	1.6	0.45	12.5	T0054451699
				NEW
LT B	2.4	0.8	12.5	LT B
LT BSL	2.4	0.45	12.5	T0054451799
				NEW
LT H	0.8	0.4	12.5	LT H
LT HSL	0.8	0.4	12.5	T0054451899
				NEW
LT C	3.2	0.8	12.5	LT C
LT D	4.6	0.8	12.5	LT D

Type	Ø a mm	b mm	c mm	Order number
LT DLL	4.6	1.2	12.5	T0054444899
LT K	1.2	0.4	20.0	LT K
LT L	2.0	1.0	20.0	LT L
LT M	3.2	1.2	20.0	LT M
LT HX 30°	0.8	0.4	17.5	LT HX
LT ALX 30°	1.6	0.7	17.5	LT ALX
LT BX 30°	2.4	0.8	17.5	T0054444299
LT AX 30°	1.6	0.8	14.1	LT AX
LT 4X 30°	1.2	0.4	17.2	LT 4X
LT MX 30°	3.2	1.2	20.0	T0054446999


ROUND




Type	Ø a mm	c mm	Order number
LT 1S	0.2	15.0	LT 1S
LT 1SNW*	0.1	15.0	T0054449699
LT 1SA	0.5	15.0	T0054448899
LT 1	0.25	13.0	LT 1
LT 1LNW*	0.1	25.4	T0054449899

Type	Ø a mm	c mm	Order number
LT 1A	0.5	13.0	T0054448999
LT AS	1.6	12.5	LT AS
LT CS	3.2	12.5	LT CS
LT 1SLX 30°	0.4	22.0	LT 1SLX
LT 1X 30°	0.4	13.0	LT 1X

* non-wettable




KNIFE



LT		Ø a mm	c mm	Order number
LT KN		2.0	16.5	LTKN
LT KN5L 45°		2.0	16.5	T0054451999


SLOPED



Type	a mm	c mm	Order number
LT 4 45°	1.2	15.0	T0054443999
LT F 45°	1.2	12.5	LTF
LT AA 60°	1.6	12.5	T0054448799
LT BB 60°	2.4	17.0	T0054444499
LT BB 45°	2.4	17.0	T0054448499
LT CC 60°	3.2	17.0	T0054444599
LT CC 45°	3.2	17.0	T0054448589

Type	a mm	c mm	Order number
LT DD 45°	4.0	20.0	T0054447899
LT DD 45° A	4.6	17.0	T0054448699
LT 11CP 45°	1.2	15.0	T0054442171
LT 22CP 45°	2.0	20.0	T0054440873
LT 33CP 45°	3.0	20.0	T0054440877
LT 44CP 45°	4.0	20.0	T0054440881


CONICAL



Type	Ø a mm	c mm	Order number
LT 1L	0.2	25.4	LT1L
LT 1LNW*	0.1	25.4	T0054449899
LT S	0.4	21.0	LTS

Type	Ø a mm	c mm	Order number
LT T	0.6	13.0	T0054448299
LT O	0.8	17.0	T0054448199
LT 1LX 35°	0.2	25.4	LT1LX

GULL WING



Type	Ø a mm	b mm	c mm	Order number
LT GW1 45°	2.3	3.2	17.8	LTGW
LT GW2 45°	3.5	4.8	17.8	T0054451199


ACCESSORIES

Type	a mm	c mm	Order number
Measuring tip WSP80			K181
Measuring tip WP80			K1111
Screw M4 external thread	8.0		T0054444999
ET-LT Adapter			T0058720781

SMT BLADE STYLE

Type	a mm	b mm	c mm	Order number
LTSMT01	10.4	.06 mm	7.1	T0054450199
LTSMT02	16.8	0.6 mm	7.1	T0054450299
LTSMT03	20.8	0.6 mm	7.1	T0054450399

* non wettable



WP120

120-watt, highest-standard performance iron;
perfect choice, lower cost, non-cartridge style tips.

Highest power and rapid response
Optimized sensor position
Meeting highest industry standards

120W, 24V




WP120 T0052919399 Pencil, XTB tip

WP120SET
WP120 pencil, XTB tip, WDH10T stand
T0052919499




CHISEL



XT	Ø a mm	b mm	c mm	Order number
XT H	0.8	0.4	36.5	T0054471399
XT A	1.6	0.7	36.5	T0054470399
XT AL	1.6	1.0	39.5	T0054470199
XT ASL	1.6	0.45	36.5	T0054474099 NEW
XT M	3.2	1.2	39.5	T0054470299
XT B	2.4	0.8	36.0	T0054470499
XT BSL	2.4	0.45	36.0	T0054474199
XT B SC	2.5	0.8	36.3	T0054473899 NEW
XT C	3.2	0.8	36.0	T0054470599

Type	Ø a mm	b mm	c mm	Order number
XT D	4.6	0.8	34.5	T0054470699
XT CSL	3.2	0.45	36.0	T0054474299 NEW
XT E	5.9	1.2	34.5	T0054470799
XT DL	4.6	0.8	39.5	T0054473699
XT MX	3.2	0.8	53.5	T0054474599 NEW
XT HX	0.8	0.4	51.5	T0054473799
XT AX 30°	1.6	0.7	51.5	T0054474399 NEW
XT BX 30°	2.4	0.8	51.5	T0054474499 NEW


ROUND



Type	Ø a mm	c mm	Order number
XT BS	2.4	36.5	T0054471599
XT CS	3.2	36.5	T0054471699

Type	Ø a mm	c mm	Order number
XT DS	5.0	34.5	T0054471799

SLOPED




Type	a mm	c mm	Order number
XT F 30°	1.2	36.5	T0054471899
XT AA 60°	1.6	36.5	T0054470899
XT BB 45°	2.4	36.5	T0054470999
XT CC 45°	3.2	36.5	T0054471099

Type	a mm	c mm	Order number
XT DDH 45 45°	4.0	40.5	T0054473099 NEW
XT D 45°	5.0	40.5	T0054472199

* non-wettable

GULL WING




XT		Ø a mm	b mm	c mm	Order number
XT GW1 45°		2.3	3.2	36.5	T0054471299
XT GW2 45°		3.5	4.8	36.5	T0054473599

KNIFE

Type	Ø a mm	c mm	Order number
XT KN 60°	2.0	45.0	T0054471199

CONICAL



Type	Ø a mm	c mm	Order number
XT O	1.0	36.5	T0054471499

ACCESSORIES

Type	c mm	Order number
Measuring tip (For the WP120)		K1121
XT Adapter M4	36.0	T0054471999
XT Adapter M5	36.0	T0054472099

Type	Ø a mm	b mm	c mm	Order number
XT GW3 45°	0.8	0.9	41.5	T0054473999

SMT BLADE STYLE

a mm	Order number
10 x 4 mm	T0054473190
20 x 4 mm	T0054473290
33 x 4 mm	T0054473390

Type	Order number	
Barrel	WP 120	T0058763709
Barrel for bent tips	WP 120	T0058765802



WP200

Highest power 200W soldering iron; ideal for highest mass applications e.g. LED back-panels or RF shields.


Maximum power and rapid response
Optimized sensor position
Meeting highest industry standards



WP200

T0052919999

CHISEL



XHT		Ø a mm	b mm	c mm	Order number
XHT C		3.2	1.2	48.0	T0054480499
XHT D		5.0	1.2	48.0	T0054480199

Type	Ø a mm	b mm	c mm	Order number
XHT E	7.6	1.5	48.0	T0054480299
XHT F	9.3	2.0	48.0	T0054480599

WMP

65 watt pencil provides fast heat-up and good thermal recovery

65W, 24V



Short tip-to-grip
37mm / 1.46"
Built-in heating element

WMP TWMP Pencil, NT1 tip

WMPSET
T0052917999
WMP pencil, NT1 tip, WDH20 stand



NT SERIES TIPS

	Type	Catalog number	A		B		C	
			in	mm	in	mm	in	mm
	Micro	NT1	0.010	0.25			0.291	7.40
	Micro	NT1S	0.010	0.25			0.333	8.45
	Bent Round	NT1X	0.016	0.40	0.063	1.60	0.321	8.15
	Round	NT4	0.047	1.20			0.390	9.90
	Chisel	NT6	0.063	1.60	0.016	0.40	0.372	9.45
		NTA	0.063	1.60	0.016	0.40	0.331	8.40
		NTB	0.094	2.40	0.031	0.80	0.289	7.35
		NTC	0.126	3.20	0.031	0.80	0.305	7.75
		NTD	0.157	4.00	0.031	0.80	0.305	7.75
		NTH	0.031	0.80	0.016	0.40	0.331	8.40
		NTK	0.047	1.20	0.016	0.40	0.331	8.40
	Fine Chisel	NT1SC	0.130	3.30			0.325	18.00
	Bent Chisel	NTAX	0.075	1.90	0.028	0.70	0.325	18.00
	Gull wing for drag soldering	NTGW	0.106	2.70	0.047	1.20	1.142	29.00



Tip removal tool T0058751710

WSP150

For jobs with extremely high heat requirements and large heat sinks.

150W, 24V



Effective heat transfer
High power and quick response

WSP150 T0052917099

WSP150SET
T0052918999
WSP150, LHTF tip, WDH30 stand



Catalog number	Order number	Style	A	B
LHTD	T0054445299	Chisel	0.197" (5.0 mm)	0.79" (2.0 mm)
LHTE	T0054445199	Chisel	0.276" (7.0 mm)	0.79" (2.0 mm)
LHTF	T0054445099	Chisel	0.366" (9.3 mm)	0.79" (2.0 mm)
LHTD45	T0054445699	Sloped 45°	0.197" (5.0 mm)	-
LHTDX	T0054446299	Chisel bent	0.199" (5.0 mm)	0.79" (2.0 mm)
LHTEX	T0054446199	Chisel bent	0.276" (7.0 mm)	0.79" (2.0 mm)
LHTFX	T0054446099	Chisel bent	0.354" (9.0 mm)	0.79" (2.0 mm)

WTA50

Desoldering tweezers for SMD components.

2 x 25W, 24V




Dual heating elements & independent sensors provide uniform temperature
The tips are attached via set screws

WTA50 T0051317199 Tweezer, WTA1 tips
WTA50SET T0053313399 WTA50, WTA1 tips, AK51 stand


THERMAL TWEEZER TIPS

WTA series tiptlets for WTA50 thermal tweezers tinned with lead-free solder

Catalog number	Order number	A	
		in	mm
WTA1	T0054414199	0.039	1.00
WTA2	T0054414699	0.118	3.00
WTA3	T0054414799	0.236	6.00



Catalog number	Order number	A	
		in	mm
WTA4	T0054414399	0.492	12.50
WTA5	T0054414499	0.728	18.50



DXV80

Desoldering irons for through hole rework.

800W, 24V



80W, 24V

Pencil and inline desoldering tools
Micro finger switch

DXV80 T0051318099 Desoldering iron, DX112 tiptlet
DXV80SET T0051318099 DXV80, DX112 tiptlet, WDH40 stand
DSX80 T0051319099 Desoldering iron, DX113HM tiptlet
DSX80SET T0051318399 DSX80, DX112/DX113 tiptlets, WDH30 stand

DESOLDERING TIPTLETS

DX series tiptlets for DSV80/DSX80 desoldering iron

Cat No.	Order number	A (O.D.)		B (I.D.)		C	
		in	mm	in	mm	in	mm
DX110	T0051314099	0.075	1.90	0.028	0.70	0.325	18.00
DX111	T0051314199	0.098	2.50	0.028	0.70	0.325	18.00
DX112	T0051314299	0.091	2.30	0.039	1.00	0.325	18.00
DX113	T0051314399	0.098	2.50	0.047	1.20	0.325	18.00
DX113HM High Mass Tiptlet	T0051315099	0.098	2.49	0.047	1.19	0.906	23.00
DX114	T0051314499	0.130	3.30	0.071	1.80	0.325	18.00
DX115	T0051314599	0.075	1.90	0.028	0.70	0.325	18.00
DX116	T0051314699	0.106	2.70	0.047	1.20	1.142	29.00
DX117	T0051314799	0.114	2.90	0.059	1.50	0.906	23.00
DX118	T0051314899	0.059	1.50	0.058	0.71	0.906	23.00
DX119 Non-Wetting Tiptlet	T0051315199	0.043	1.10	0.028	0.71	1.22	31.00
DX120 Pad Cleaning Tiptlet	T0051315299	0.098	2.49	0.043	1.09	0.866	22.00

DSX120 DESOLDERING IRON NEW

Ideal for professional rework applications.

120W, 24V



35-second heat up time
Low-maintenance tiplets

DSX120 T0051319899 Desoldering pencil, XDS1 triplet
WDH30 T0051515299 Stand

XDS LONG-SHAFT DESOLDERING TIPPLETS

For use with the DSX irons










■ Innovative tiplets

120-watt low mass silver long shaft heating element with an eccentric oval for easy triplet exchange

■ Limited cleaning

New clog-resistant XDS tiplets reduce the need for frequent cleaning




Model number	Order Number	A (ID)	B (OD)	C (Length)
XDS1 	T0051325099	Ø 1.4 mm Ø 0.0651 in	Ø 2.5 mm Ø 0.0984 in	Ø 10.5 mm Ø 0.4134 in
XDS2 	T0051325199	Ø 3.0 mm Ø 0.1181 in	Ø 5.3 mm Ø 0.2087 in	Ø 10.5 mm Ø 0.4134 in
XDS3 	T0051325299	Ø 1.0 mm Ø 0.0394 in	Ø 2.3 mm Ø 0.0906 in	Ø 10.5 mm Ø 0.4134 in
XDS4 	T0051325399	Ø 1.2 mm Ø 0.0472 in	Ø 2.5 mm Ø 0.0984 in	Ø 10.5 mm Ø 0.4134 in
XDS5 	T0051325499	Ø 1.8 mm Ø 0.0709 in	Ø 3.3 mm Ø 0.1299 in	Ø 10.5 mm Ø 0.4134 in
XDS6 	T0051325599	Ø 0.7 mm Ø 0.0276 in	Ø 1.9 mm Ø 0.0748 in	Ø 16.5 mm Ø 0.6496 in
XDS7 	T0051325699	Ø 1.2 mm Ø 0.0472 in	Ø 2.7 mm Ø 0.1063 in	Ø 16.5 mm Ø 0.6496 in
XDS8 	T0051325799	Ø 1.5 mm Ø 0.0591 in	Ø 2.9 mm Ø 0.1142 in	Ø 10.5 mm Ø 0.4134 in
XDS9 	T0051325899 (Measuring tip)	Ø .55 mm Ø 0.0217 in	Ø 2.2 mm Ø 0.0866 in	Ø 11.0 mm Ø 0.4331 in

XDSL SERIES DESOLDERING TIPPLETS NEW

For use with the DSX120 desoldering iron.

- Extended shaft tiptlets deposit molten solder directly into the solder collection tube
- Easy change tiplet design
- Stainless-steel tube liner for maximum durability
- Minimize tip cleaning time by changing the tiplet and suction path simultaneously
- Optimized at the lowest temperature, tiplet life is extended up to three times

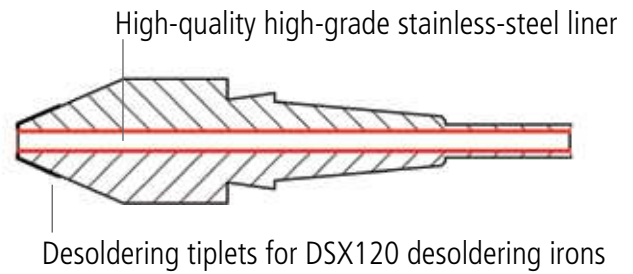

Model number	Order number	A (ID)	B (OD)	C (Length)
XDSL1	T0051325999	Ø 1.4 mm Ø 0.0651 in	Ø 2.5 mm Ø 0.0984 in	Ø 10.5 mm Ø 0.4134 in
XDSL2	T0051326099	Ø 3.0 mm Ø 0.1181 in	Ø 5.3 mm Ø 0.2087 in	Ø 10.5 mm Ø 0.4134 in
XDSL3	T0051326199	Ø 1.0 mm Ø 0.0394 in	Ø 2.3 mm Ø 0.0906 in	Ø 10.5 mm Ø 0.4134 in
XDSL4	T0051326299	Ø 1.2 mm Ø 0.0472 in	Ø 2.5 mm Ø 0.0984 in	Ø 10.5 mm Ø 0.4134 in
XDSL5	T0051326399	Ø 1.8 mm Ø 0.0709 in	Ø 3.3 mm Ø 0.1299 in	Ø 10.5 mm Ø 0.4134 in
XDSL6	T0051326499	Ø 0.7 mm Ø 0.0276 in	Ø 1.9 mm Ø 0.0748 in	Ø 16.5 mm Ø 0.6496 in
XDSL7	T0051326599	Ø 1.2 mm Ø 0.0472 in	Ø 2.7 mm Ø 0.1063 in	Ø 16.5 mm Ø 0.6496 in
XDSL8	T0051326699	Ø 1.5 mm Ø 0.0591 in	Ø 2.9 mm Ø 0.1142 in	Ø 10.5 mm Ø 0.4134 in
XDSL9	T0051325899 (Measuring tip)	Ø .55 mm Ø 0.0217 in	Ø 2.2 mm Ø 0.0866 in	Ø 11.0 mm Ø 0.4331 in

