



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Core **Toroid 107/65/25**

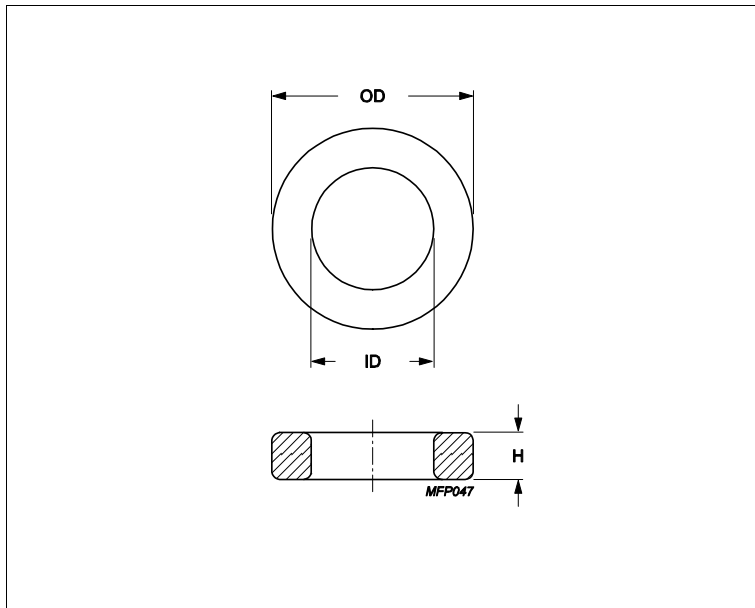

Effective parameters				
	Parameter	Value	Unit	
	$\Sigma(I/A)$	core factor (C1)	0.504	mm <sup>-1</sup>
	<b>Ve</b>	effective volume	133000	mm <sup>3</sup>
	<b>Le</b>	effective length	259	mm
	<b>Ae</b>	effective area	514	mm <sup>2</sup>
	<b>m</b>	mass of core	≈ 680	g/pcs

Epoxy coating DC isolation voltage 2000.

Maximum operating temperature of the coating is 200°C.

### Dimensions (mm)

Cores	OD	ID	H	
<b>T107/65/25</b>	107 ± 2	65 ± 1.3	25 ± 0.75	Uncoated
<b>TX107/65/25</b>	109.5 max	63.3 min	26.3 max	Epoxy Coated

### Core data

Cores	Material	AI (nH/turns <sup>2</sup> )	AI tolerance	μe
<b>T107/65/25</b>	3C11	10800	± 25%	≈ 4300
<b>T107/65/25</b>	3C94	5780	± 25%	≈ 2300
<b>T107/65/25</b>	3E27	13800	± 25%	≈ 5500

### Core data

Cores	Material	AI (nH/turns <sup>2</sup> )	AI tolerance	μe
<b>TX107/65/25</b>	3C11	10800	± 25%	≈ 4300
<b>TX107/65/25</b>	3C94	5780	± 25%	≈ 2300
<b>TX107/65/25</b>	3E27	13800	± 25%	≈ 5500