



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Specification Sheet

Part Number: T18MR9M4

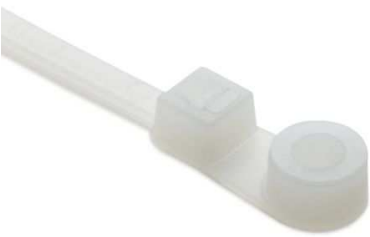

Screw-Mount Cable Tie, 4.3" Long, #4 Screw, .79" Max Bundle Dia, 18lb, PA66, Natural, 1000/pkg

Article Number	113-00028
Type	T18MR
Color	Natural (NA)
Features & Benefits	<ul style="list-style-type: none">• Mount design secures firmly on any #4 Screw• Screw mount style creates low insertion and high extraction force.
Quantity Per	bag
Product Description	Screw Mount Cable Ties are made of all plastic and provide a quick and simple method of mounting.
Short Description	Screw-Mount Cable Tie, 4.3" Long, #4 Screw, .79" Max Bundle Dia, 18lb, PA66, Natural, 1000/pkg
Global Part Name	T18MR-PA66-NA

Minimum Tensile Strength (Imperial)	18.0
Minimum Tensile Strength (Metric)	80
Length L (Imperial)	4.3
Length L (Metric)	110.0
Fixation Method	Fixing hole
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.1
Width W (Metric)	2.5
Bundle Diameter Min (Imperial)	0.06
Bundle Diameter Min (Metric)	1.5
Bundle Diameter Max (Imperial)	0.8
Bundle Diameter Max (Metric)	20.0
Thickness T (Imperial)	0.039
Thickness T (Metric)	1.0

Height H (Imperial)	.17
Height H (Metric)	4.20
Mounting Hole Diameter D (Imperial)	0.12
Mounting Hole Diameter D (Metric)	3.1 mm
Mounting Hole Diameter D Max (Metric)	3.1
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +185°F (-40°C to +85°C)
ROHS Complaint	Yes
Certification/Specification WEB	UL
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity(Imperial)	1000
Package Quantity (Metric)	1000

Customs Number

3926909987