## imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.


We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



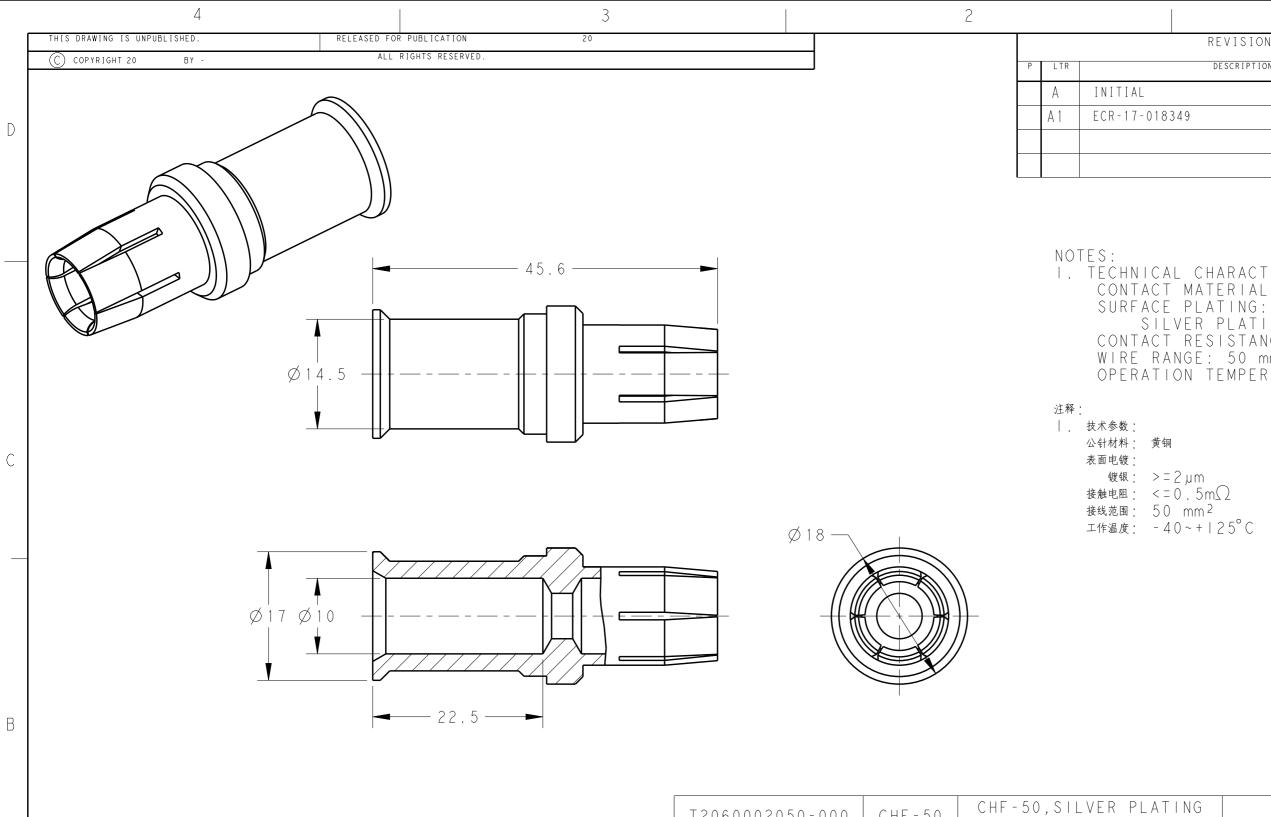

T2060002050-000	CHF - 50	CHF-50,SILVER PLATING HMN-00 母针 50mm <sup>2</sup> ,镀银		50	22.5	
PART NUMBER 料 号	F	PART DESCRIPTION 描述		WIRE GAUGE (mm <sup>2</sup> ) 线规 (mm <sup>2</sup> )	STRIPPING LENGTH (mm) 剥线长度 (mm)	
	OLERANCES UNLESS	DWN 11MAY2015 David Wang CHK 11MAY2015 Chris Wang APVD 11MAY2015	NAME	<b>TE</b> TE Con	nectivity	
0 PLC 0 PLC 1 PLC 2 PLC 3 PLC	±-	APVD TIMATZOTS Xiang Xu PRODUCT SPEC 108-137057 APPLICATION SPEC	CHF-50 HM SOCKET CONTACT			
4 PLC ANGLES MATERIAL FINISH		114-137057 weight _	size cage co A 3 0 0 7 7	9C-T206000205000		
 -	-	Customer Drawing		SCALE 2:1	1 <sup>of</sup> 1 <sup>rev</sup> A 1	

А

С

REVISIONS			
DESCRIPTION	DATE	DWN	APVD
	11MAY2015	DW	CW
	14DEC2017	DW	CW

1

I. TECHNICAL CHARACTERISTICS: CONTACT MATERIAL: BRASS SILVER PLATING: >=2µm CONTACT RESISTANCE:  $<=0.5m\Omega$ WIRE RANGE: 50 mm<sup>2</sup> OPERATION TEMPERATURE: -40~+125°C

\_\_\_\_\_ А

В

С

D