



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- Ratings up to 16A, 250V ac
- PCB and solder terminals
- Voltage Selector Models
- Snap in and flange mounting
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

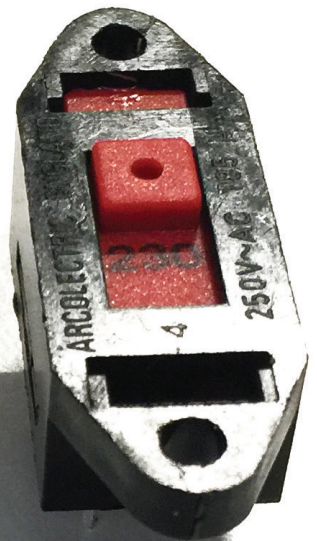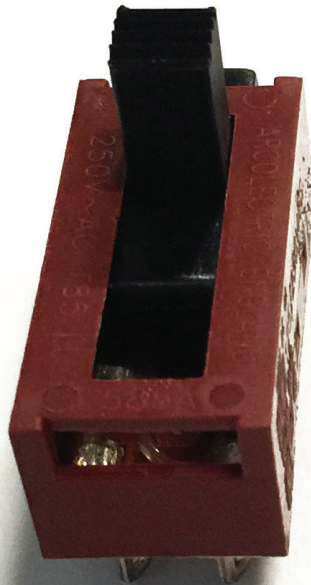

2000 Slide Switches - up to 5 position

10A 250Vac



Key Features


- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators








Approvals and specifications

- ☑ 10A 250Vac T85
6(3)A 250Vac T85
 - ☑ UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990
- μ contact gap
Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.


Terminal	Series	Position	Circuit	Slider
<p>K</p> <p>2.8 x 0.8</p> <p>R</p> <p>2.8 x 0.8</p> <p>T</p> <p>Solder</p> <p>X</p> <p>PCB 0.8 Sq.</p> <p>Y</p> <p>PCB 0.8 Sq.</p> <p>For mounting stability switches have extra "support" terminals</p> <p>* Nominal - Dimension varies with body type. For exact figure call sales</p>	<p>2</p>	<p>2</p> <p>Switching positions</p>	<p>10</p> <p>20</p> <p>30</p> <p>40</p> <p>3</p> <p>Switching positions</p> <p>10</p> <p>20</p> <p>30</p> <p>40</p> <p>4</p> <p>Switching positions</p> <p>10</p> <p>20</p> <p>30</p> <p>40</p> <p>5</p> <p>Switching positions</p> <p>10</p> <p>20</p> <p>30</p> <p>40</p>	<p>0</p> <p>1</p> <p>2</p> <p>3</p> <p>4</p> <p>5</p> <p>6</p> <p>7</p> <p>9</p> <p>A</p> <p>B</p> <p>C</p> <p>D</p> <p>E</p> <p>G</p> <p>H</p> <p>J</p> <p>K</p> <p>L</p> <p>N</p> <p>P</p> <p>R</p> <p>S</p> <p>T</p>

Examples

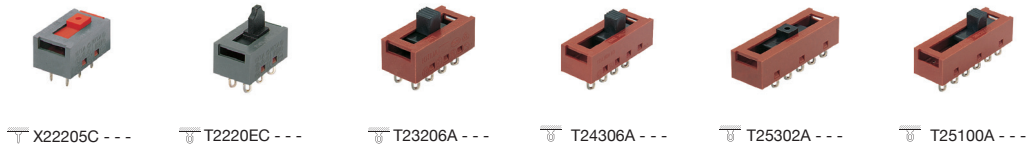


Body		Options
<p>C 2 positions</p> 	<p>H 2 positions</p> 	<p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing A wide range is available. For all options call sales</p>
<p>A 3 positions</p> 	<p>H 3 positions</p> 	
<p>A 4 positions</p> 	<p>H 4 positions</p> 	
<p>A 5 positions</p> 		

Dimensions

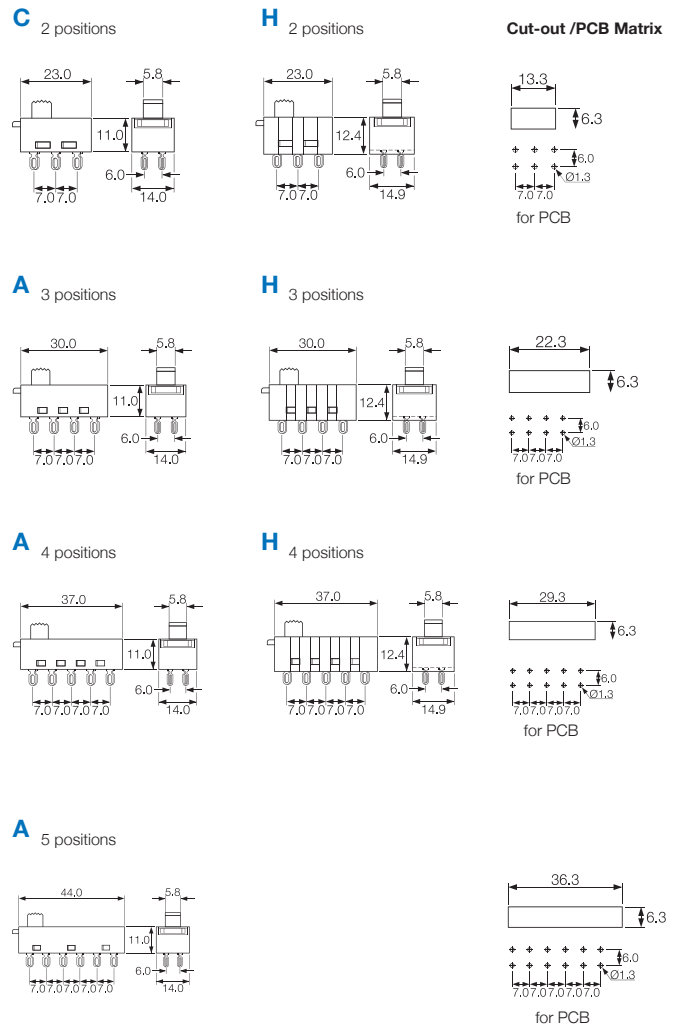

2000 Slide Switches - Snap fit and panel mount

10A 250Vac



115/230 is preferred legend

Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

10A 250Vac T85
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).

2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider	
<p>K</p> <p>2.8 x 0.8</p>	2	2 Switching positions	<p>10</p>	<p>0</p>	
<p>R</p> <p>2.8 x 0.8</p>			<p>20</p>		<p>6</p>
<p>T</p> <p>Solder</p>			<p>30</p>		<p>7</p>
<p>X</p> <p>PCB 0.8 Sq. For mounting stability switches have extra "support" terminals</p> <p>* Nominal - Dimension varies with body type. For exact figure call sales</p>			<p>40</p>		<p>8</p>
	3	3 Switching positions	<p>10</p>	<p>2</p>	
			<p>20</p>	<p>3</p>	
			<p>30</p>	<p>4</p>	
			<p>40</p>	<p>5</p>	
			<p>10</p>	<p>6</p>	
			<p>20</p>	<p>7</p>	
			<p>30</p>	<p>8</p>	
			<p>40</p>	<p>9</p>	
			<p>10</p>	<p>A</p>	
			<p>20</p>	<p>B</p>	
			<p>30</p>	<p>C</p>	
			<p>40</p>	<p>D</p>	
			<p>10</p>	<p>E</p>	
			<p>20</p>	<p>F</p>	
			<p>30</p>	<p>G</p>	
			<p>40</p>	<p>H</p>	
			<p>10</p>	<p>I</p>	
			<p>20</p>	<p>J</p>	
			<p>30</p>	<p>K</p>	
			<p>40</p>	<p>L</p>	
			<p>10</p>	<p>M</p>	
			<p>20</p>	<p>N</p>	
			<p>30</p>	<p>O</p>	
			<p>40</p>	<p>P</p>	
			<p>10</p>	<p>Q</p>	
			<p>20</p>	<p>R</p>	
			<p>30</p>	<p>S</p>	
			<p>40</p>	<p>T</p>	

Examples



T22208E ---



T22308E ---



T2230MF ---






T22205B ---



T22305B ---




T23204B ---


Body	Options
<p>B With mounting holes</p> 	<p>Colour Call sales for custom colours. A full range is available for large orders. Standard body colour is black.</p>
<p>E Snap fit</p> 	
<p>F Snap fit (single pole ON OFF only)</p> 	

Dimensions



2 Pos B



3 Pos B





2 Pos E



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65

2 Pos F



Panel thickness	Dim. Y
0.8-1.2	29.75/29.85
1.63	30.15/30.25
2.0	30.35/30.45
2.5	30.55/30.65