



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- Heat Reflective Aluminum Laminated Fiberglass
- Self Wrap And Seal Overlap With High Temperature Adhesive Strip
- Reflects Radiant Heat
- Resists Gasoline And Engine Chemicals
- Cut And Abrasion Resistant



**Cut Cleanly**  
**Scissors**

**Material**  
Aluminum Laminated Fiberglass

**Grade**  
T6F

**Wall Thickness**  
.042"

**Drawing Number**  
TF001TW-WD


**4' Put-Ups**

Nominal Size	Part #	Wall Thickness ±0.007"	Bulk Box	Box 8x8	Box 6x6	Box 4x4	Available Colors	Lbs/10Pcs.
1/4"	T6F0.25SV	0.042"	250	140	100	50	Silver	1.0
3/8"	T6F0.38SV	0.042"	250	90	50	30	Silver	1.5
1/2"	T6F0.50SV	0.042"	250	70	40	25	Silver	2.0
5/8"	T6F0.63SV	0.042"	150	60	35	20	Silver	2.5
3/4"	T6F0.75SV	0.042"	125	50	30	15	Silver	3.0
1"	T6F1.00SV	0.042"	70	30	20	9	Silver	3.5
1 1/4"	T6F1.25SV	0.042"	63	20	10	6	Silver	4.5
1 1/2"	T6F1.50SV	0.042"	40	15	8	4	Silver	5.0
2"	T6F2.00SV	0.042"	24	8	4	2	Silver	6.0


**Reflective Aluminized Surface Bonded To Insulating Self Wrapping Fiberglass**

The newest item in the ThermaShield line of aluminized fiberglass products, T6 is designed for ease of installation when component disassembly isn't practical. Just wrap the pre-formed, split flexible tube around any component and seal the sides with the high temperature adhesive strip to provide protection from hot pipes and engine components.

The highly reflective aluminized exterior, combined with the insulating fiberglass interior, protects delicate wire bundles, cables and lines from damage caused by nearby exhaust pipes, headers or other heat generating components.

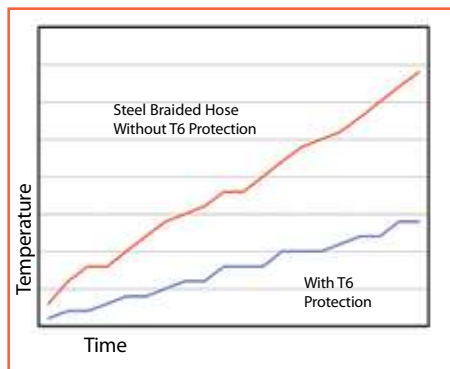

**Colors Available:**  
Silver (SV)

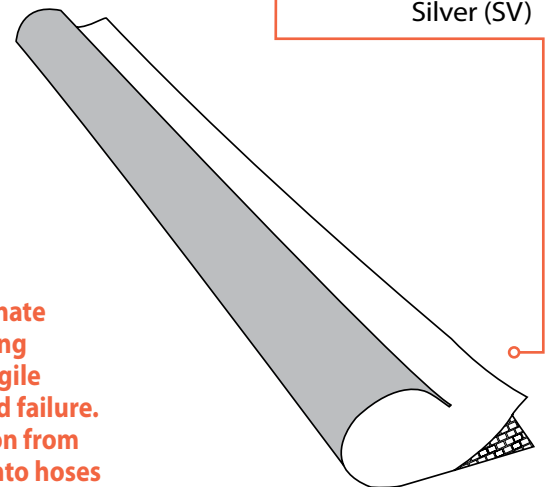

When applied, the aluminum laminate reflects heat away and the insulating fiberglass backing protects the fragile contents from thermal damage and failure. T6 can reduce the heat transmission from hot pipes or engine components into hoses or harnesses by up to 50% or more.





## **ABRASION** **FLAMMABILITY**

**Abrasion Resistance**  
High

Rating \_\_\_\_\_ Non Flammable

**Abrasion Test Machine**  
Taber 5150

**Abrasion Test Wheel**  
Calibrase H-18

**Abrasion Test Load**  
500g

**Room Temperature**  
71°F

**Humidity**  
53%

**Most Foil Coating Worn  
Away In Tested Area Of  
Material**  
3,500 Test Cycles

**Braid Worn Through In  
Both Directions**  
Material Destroyed  
6,000 Test Cycles

**Pre-Test Weight**  
18,188.4 mg

**Post-Test Weight**  
16,555.5 mg

**Test End Loss Of Mass  
Point Of Destruction**  
1,632.9 mg

## **CHEMICAL RESISTANCE**


1=No Effect    4=More Affected  
2=Little Effect    5=Severely Affected  
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-78 08 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	2
Strong Oxidants _____	2
Esters/Ketones _____	1
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes

**Melt Point**  
ASTM D-2117  
2,048°F (1,120°C)

**Maximum Continuous**  
Mil-I-23053  
491°F (255°C)

**Minimum Continuous**  
-76°F (-60°C)

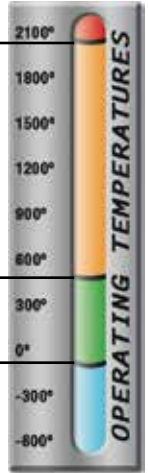

## **PHYSICAL PROPERTIES**

Flammability Rating \_ Non Combustible  
Recommended Cutting \_\_\_\_\_ Scissor  
Colors \_\_\_\_\_ 1  
Wall Thickness \_\_\_\_\_ .042

www.techflex.com