



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





T9602 Humidity & Temperature Sensor for OEM Installation



Features

- Fully calibrated and temperature compensated
- Water resistant (IP 67 Certified)
- Digital or Pulse Density Modulated convertible to analogue
- Available in multiple flexible cable lengths
- Precision & accuracy ($\pm 2\%$ RH, $\pm 0.5^\circ\text{C}$, 14 bit resolution)
- Low current consumption
- Designed for reliability in harsh environments
- Flexible mounting options



Applications

- Energy saving HVAC Control – Air Conditioning, Refrigeration, Indoor Air Quality, Vent Fans, Home Appliances, Humi/Dehumidifiers
- Process Control & Instrumentation - Medical Instruments, Handheld Devices, Weather Stations, Food Processing, printers, RFID's

The T9602 offers the most advanced and cost effective humidity and temperature sensing solution for virtually any type of application.

Based on our own capacitive polymer sensor chip and ASIC integrated into an easy mount OEM package.

Each sensor is individually calibrated and tested. The T9602 is simple and ready to use without further calibration or temperature compensation.

The T9602 provides linearized output signals in one of two interfaces to meet customer requirements.

- I²C interface
- PDM output convertible to an analogue signal
- Refer to Application guide section for more detailed interfacing information

Amphenol
Advanced Sensors

Assembly Accuracy Specifications

Relative Humidity (RH%)

Resolution	14 bit (0.01% RH)
Accuracy ¹	±2.0% RH (20~80% RH) ±3.5% RH (0% to 20%) and (80% to 100%) (Figure 1)
Repeatability	±0.2% RH
Hysteresis	±1.0% RH
Linearity	<2.0% RH
Response Time ²	≤ 29 sec (T 63%)
Temp Coefficient	0.13% RH/°C (at 10~60°C, 10~90% RH)
Operating	0 ~ 95% RH
Long Term Drift	<0.5% RH/year (Normal conditions)


1. Accuracies measured at 25°C, nominal voltage.
2. 30% RH step response, measured at 25°C in a 1 m/sec air flow.

Temperature (°C)


Resolution	14 bit (0.01°C)
Accuracy ¹	±0.5°C
Repeatability	±0.1°C
Response Time ²	≤116 sec (T 63)
Operating Range ³	-20°C to 70°C
Long Term Drift	<0.05°C/year (Normal conditions)

1. Accuracies measured at 25°C, nominal voltage.
2. 25°C step response in a 1 m/sec air flow.
3. Minimum design range, documented testing 0°C to 50°C.

Typical %RH Accuracy

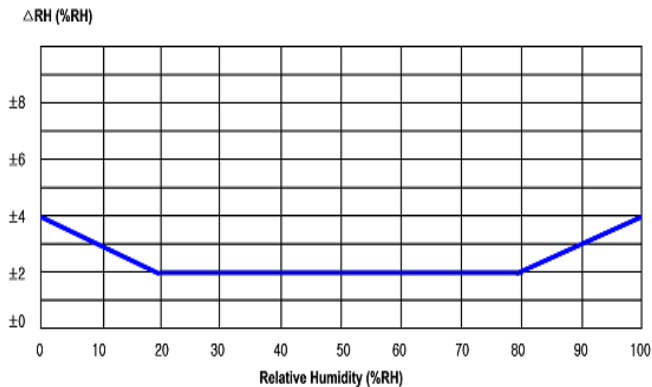

Typical Temperature Accuracy

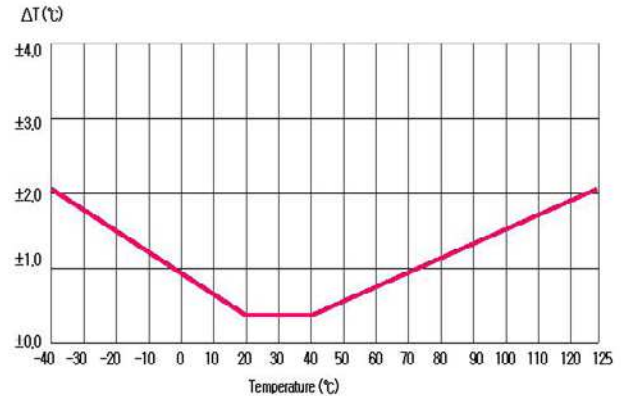

Application Guide

Users can refer to Application Guide AAS-916-127 to find the firmware requirements needed to interface to the digital sensors in the update mode, as well as the processes necessary to convert the Pulse Density Modulated (PDM) outputs to analogue outputs.

Hardware and Environmental Specifications

Method

Capacitive polymer RH Sensor, PTA (Proportional to Absolute) integrated temperature sensor.

Operating Conditions

- -20°C to 70°C
- 0% to 100% RH

Storage Conditions

- -40°C to 85°C

Output Modes

- Digital Models - I²C
- Analogue Models - PDM (Convertible to analogue)

Power Supply Requirements

- 3.3 VDC or 5.0 VDC \pm 5% (Nominal voltage is model dependent)

Current Consumption

- 750 μ A (typical)

Cable

- Outer Diameter 4.20 \pm 0.20 mm, 4 Core, shielded, double insulated and flexible
- Varying lengths dependent on the model. Refer to the ordering Information

Connector

- Manufacturer - JST
- Sensor Connector Housing - Part Number EHR-4
- Sensor Connector Header - Part Numbers B4B-EH-A or S4B-EH

Mounting Options

- Grommet or cable P Clamp
- P Clamp - 9.53 mm Hellermann Tyton (MPN T3D03750M4) or equivalent
- Grommet - 11 mm Advanced Antivibration Components (MPN V12R30M16004616) or equivalent.


Approvals and Qualifications

- RoHS / REACH Compliant
- IP67 Certified
- Halogen Free Design
- Cable UL VW-1 Certified


Warranty Terms

- 12 months

Internal Wiring Diagrams

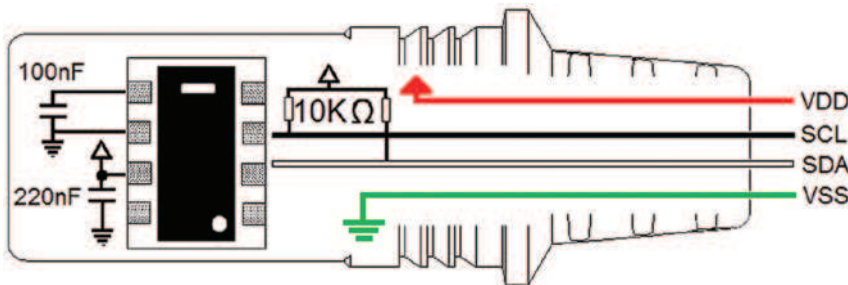

T9602 Digital Wiring Diagram

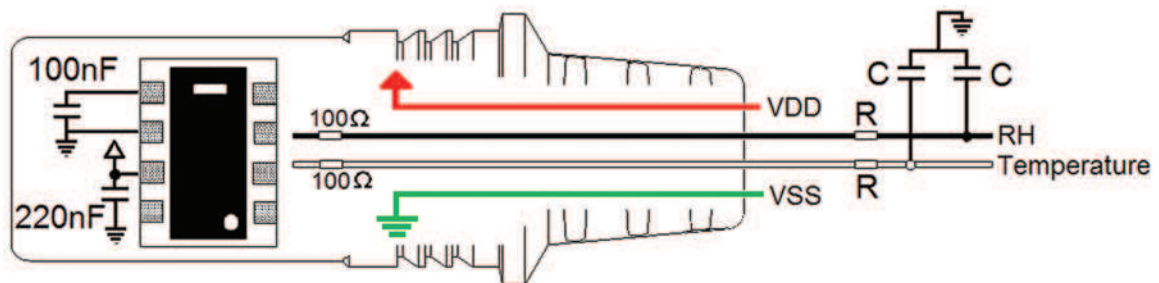


T9602 Analog Wiring Diagram

Sensor Pin Design


Digital

1. V+
2. Ground
3. SDA
4. SCL




Analogue

1. V+
2. Ground
3. PDM RH
4. PDM Temp



Customer Interface Drawing

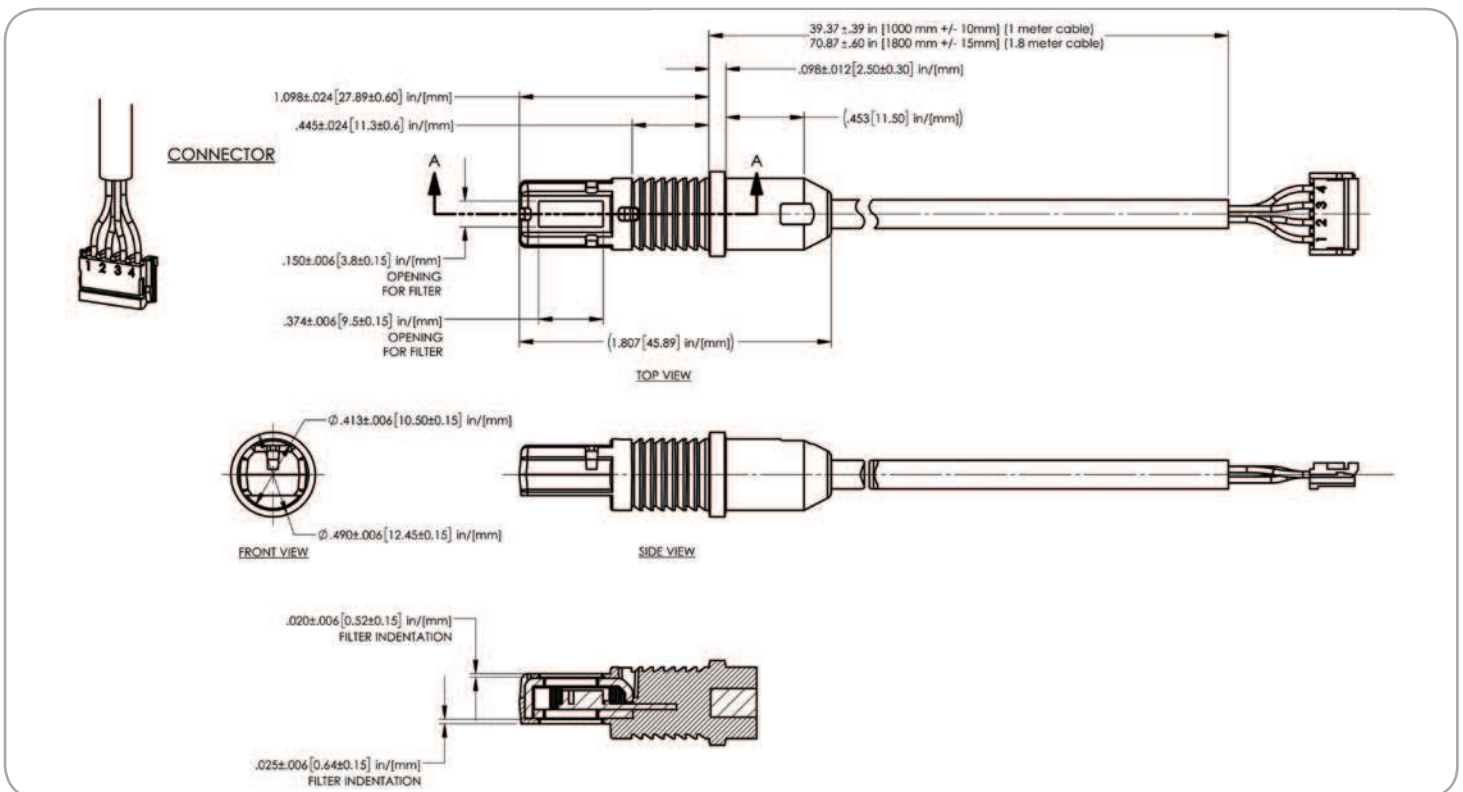

Ordering Information

Part Number	Output	Operating Voltage	
T9602-3-D	I2C Digital	3V	1.8m cable length
T9602-5-D	I2C Digital	5V	1.8m cable length
T9602-3-D-1	I2C Digital	3V	1m cable length
T9602-5-D-1	I2C Digital	5V	1m cable length
T9602-3-A	PDM Analogue	3V	1.8m cable length
T9602-5-A	PDM Analogue	5V	1.8m cable length
T9602-3-A-1	PDM Analogue	3V	1m cable length
T9602-5-A-1	PDM Analogue	5V	1m cable length

Amphenol
Advanced Sensors

www.telaire.com
www.amphenol-sensors.com

© 2018 Amphenol Corporation. All Rights Reserved.
 Specifications are subject to change without notice.