



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Economical And Easy To Install
- Cuts Easily With Scissors
- Reflects Radiant Heat
- Insulates Delicate Wires And Components
- Resists Gasoline And Engine Chemicals



Cut Cleanly
Scissor

Material

Aluminum Laminated Fiberglass

Grade

TCN

Wall Thickness

.045"

Drawing Number

TF001TT-WD

Put-Ups

Nominal Size	Part #	Wall Thickness ±0.006"	4' Pcs. Put-Ups				Available Colors	Lbs/ 10Pcs.
			Bulk Box	Box 8x8	Box 6x6	Box 4x4		
3/8"	TCN0.38SV	0.045"	300	80	45	30	Silver	1.0
1/2"	TCN0.50SV	0.045"	250	70	40	25	Silver	1.2
5/8"	TCN0.63SV	0.045"	150	60	35	20	Silver	1.5
3/4"	TCN0.75SV	0.045"	125	50	30	15	Silver	1.8
7/8"	TCN0.88SV	0.045"	100	40	25	12	Silver	1.9
1"	TCN1.00SV	0.045"	88	30	20	9	Silver	2.1
1 1/4"	TCN1.25SV	0.045"	63	20	10	6	Silver	2.3


Reflective Aluminized Surface Bonded to Insulating Fiberglass


THERMASHIELD creates a buffer between your wires, hoses and cables and the high temperature environments they are required to perform in. ThermaShield is engineered by laminating an aluminum heat shield to a layer of strong fiberglass insulation. This system provides superior protection from radiant heat by reflecting it away from sensitive electronics, wiring and hoses.

THERMASHIELD CONVOLUTED (TCN) is designed to easily slip over wires or hoses, and bend in any direction needed. The seamless construction provides full coverage and protection, and the flexible sleeving cuts easily with scissors.

- Colors Available:
Silver (SV)

When applied, the aluminum laminate reflects heat away and the insulating fiberglass backing protects the fragile contents from thermal damage and failure.

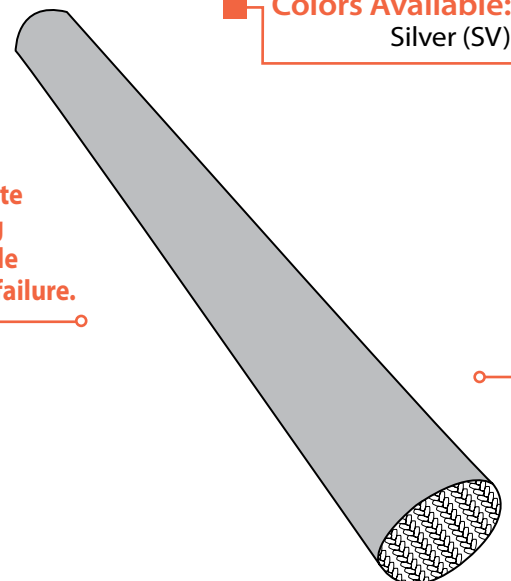



ABRASION **FLAMMABILITY**

Abrasion Resistance
Very High

Rating _____ Non Combustible
Will not burn

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____ 1
Aliphatic Solvents _____ 1
Chlorinated Solvents _____ 1
Weak Bases _____ 1
Salts _____ 1
Strong Bases _____ 1
Salt Water 0-S-1926 _____ 1
Hydraulic Fluid MIL-H-5606 _____ 1
Lube Oil MIL-L-7808 _____ 1
De-Icing Fluid MIL-A-8243 _____ 1
Strong Acids _____ 2
Strong Oxidants _____ 2
Esters/Ketones _____ 1
UV Light _____ 1
Petroleum _____ 1
Fungus ASTM G-21 _____ 1
Halogen Free _____ Yes
RoHS _____ Yes

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
491°F (255°C)

Minimum Continuous
-76°F (-60°C)

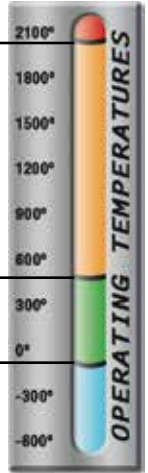

PHYSICAL PROPERTIES

Flammability Rating _ Non Combustible
Recommended Cutting _____ Scissor
Colors _____ 1
Wall Thickness _____ .045

www.techflex.com