



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Description

Hall effect type current sensor with a single digital output factory programmed to go low when a given current threshold is exceeded. The TD Series is able to operate within a temperature range of -40°C to 125°C and has a fast response time of 1µs (typical). The miniature package size allows the TD series to be mounted on printed circuit boards and is integrated with an open collector digital output which is ideal for interfacing to control circuitry.

## Typical Applications

Welding equipment, servo drives, treadmills, automotive power conversion, power supplies, home audio, MRI equipment

## Ordering Information

### Type No

TD	Over Current Detector
	<b>Trip Point</b>
<b>015</b>	15 Amp
<b>020</b>	20 Amp
<b>025</b>	25 Amp
<b>030</b>	30 Amp
<b>035</b>	35 Amp
<b>040</b>	40 Amp
<b>045</b>	45 Amp
<b>050</b>	50 Amp
<b>055</b>	55 Amp
<b>060</b>	60 Amp
<b>065</b>	65 Amp
<b>070</b>	70 Amp
<b>075</b>	75 Amp
<b>080</b>	80 Amp
<b>085</b>	85 Amp
<b>090</b>	90 Amp
<b>095</b>	95 Amp
<b>100</b>	100 Amp
<b>105</b>	105 Amp
<b>110</b>	110 Amp
<b>115</b>	115 Amp
<b>120</b>	120 Amp
<b>125</b>	125 Amp

TD - 025 = ordering example



## Technical Data

### Absolute Maximum Ratings

Supply Voltage	-1.0 to +25 VDC
Voltage Externally Applied to Output	+25 VDC max (Output high, current below $I_{trip}$ ) -0.5 VDC min (Output high or low)
Output ON current (sink)	50 mA
Operating Temp Range	-40° C to +125° C
Sensed Current	+/- 500 Amp peak
RMS voltage for AC isolation test, 50/60 Hz, 1 minute	2.5 kVAc

Absolute maximum ratings are the extreme limits that the detector will withstand without damage. Electrical operation and characteristics are not guaranteed as the maximum limits are approached. Proper application of the detector must ensure that the detector operates within the operating characteristics below.

## Operating Characteristics

	Symbol	Min	Typ.	Max	Notes
Supply Voltage	$V_s$	3.8		24.0	VDC
Supply Current	$I_s$			10.0	mA
Operating Temperature	$I_s$	-40		125	°C
Output Trip Time	$T_{trip}$		1.0	2.5	µS, $di/dt=I_{trip}/\mu S$
Output ON Voltage	$V_{os}$		0.15	0.40	VDC sinking 20 mA
Output ON Current	$I_{os}$			20	mA

Note 1: Detector sensitive to unidirectional current as defined in mechanical dimension drawing

## Trip Currents (Amps @ 25° C)

Trip Current	Min	Max
15	13.2	16.8
20	17.6	22.4
25	22	28
30	26.4	33.6
35	30.8	39.2
40	35.2	44.8
45	39.6	50.4
50	44	56
55	48.4	61.6
60	52.8	67.2
65	57.2	72.8
70	61.6	78.4
75	66	84

Trip Current	Min	Max
80	70.4	89.6
85	74.8	95.2
90	79.2	100.8
95	83.6	106.4
100	88	112
105	92.4	117.6
110	96.8	123.2
115	101.2	128.8
120	105.6	134.4
125	110	140

## Trip Current vs. Temperature

Figure 1 - TD-025

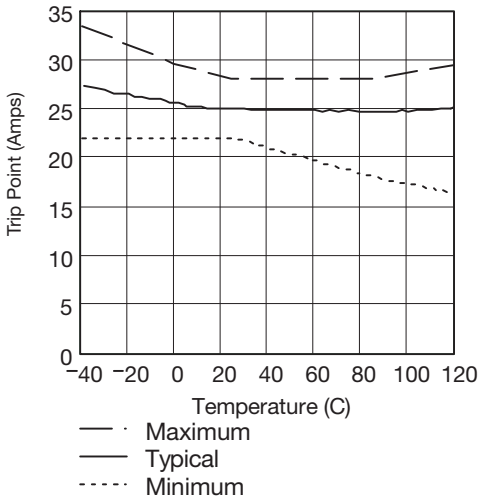


Figure 2 - TD-030

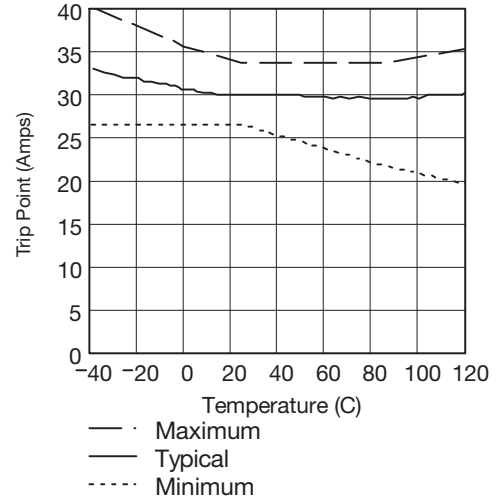


Figure 3 - TD-035



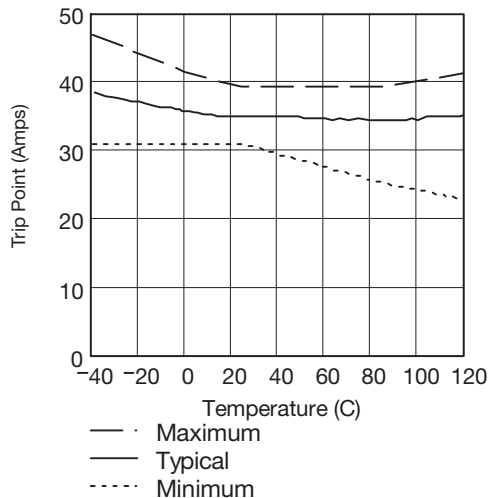


Figure 4 - TD-040

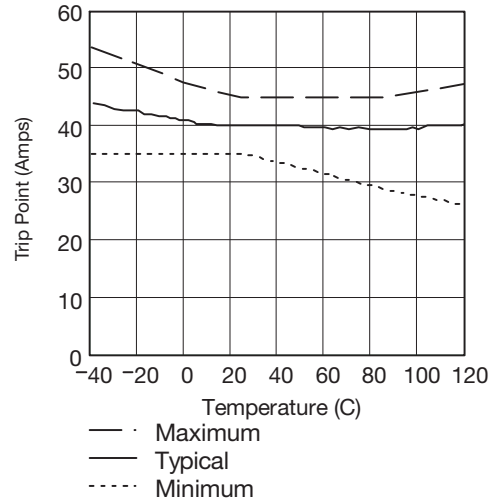


**Trip Current vs. Temperature**


**Figure 5 - TD-045**

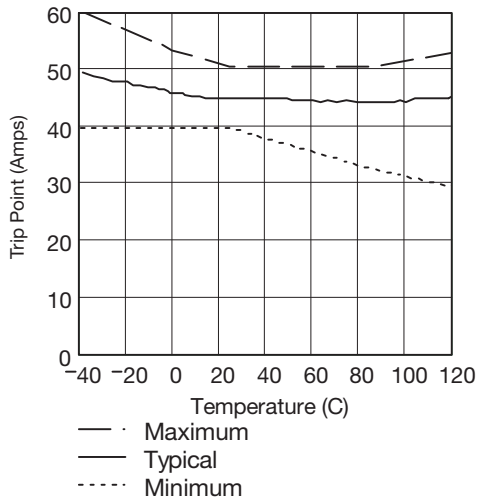


**Figure 6 - TD-050**

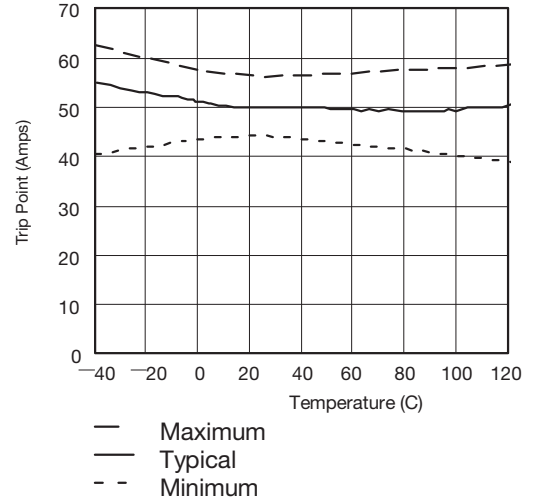


**Figure 7 - TD-075**

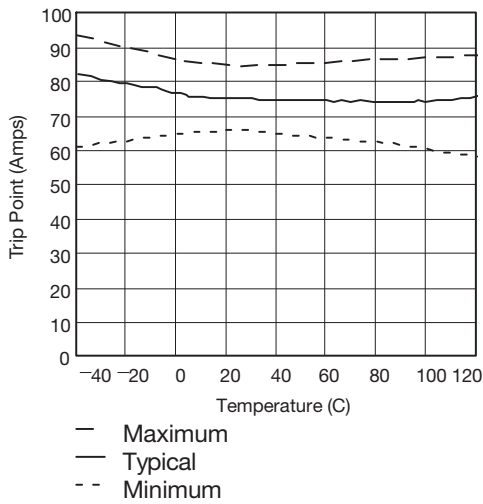


**Figure 8 - TD-100**

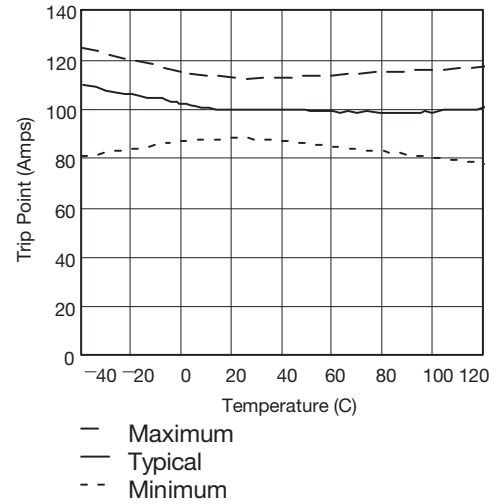

**Figure 9 - TD-125**

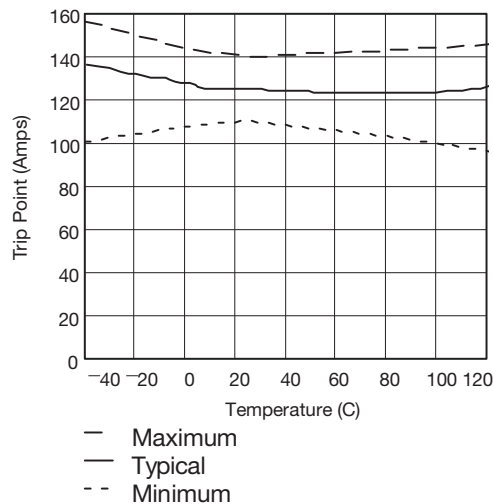

## Mechanical Dimensions - A Package

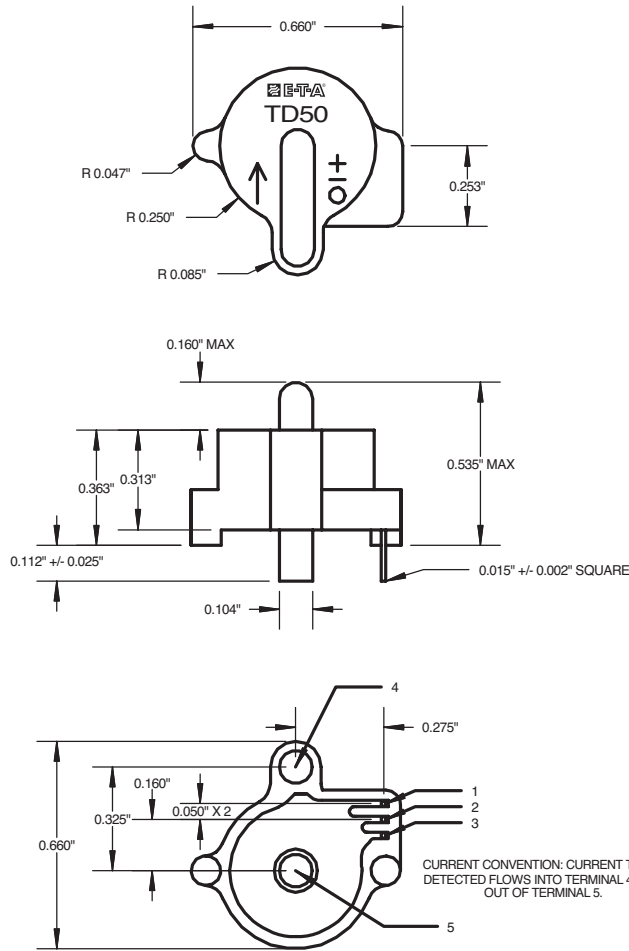

Dimensions are in inches  
Dimensional tolerances unless otherwise specified: +/- 0.010"


Pin	Desc.
1	Vo
2	GND
3	Vs
4	Iin
5	Iout

## Printed Circuit Board Mounting Footprint

Component side  
(component side view)



Solder side  
(component side view)



Hole Location Chart

Hole	X	Y
A1	0.275"	-0.110"
A2	0.275"	-0.160"
A3	0.275"	-0.210"
C1	0.000	0.000
C2	0.000	-0.325"

Hole Description Chart

Hole	Finished diameter	Top Pad	Bottom Pad
A	0.027"	0.035"	0.035" x 0.100"
C	0.120"	0.200"	0.200"

Notes:

1. Center aperture of detector located at C1, X=0.000, Y=0.000
2. Hole diameter tolerance +/- 0.003"
3. Hole location tolerance +/- 0.003"