



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





TD300

## PROJECT INFORMATION

Project Name \_\_\_\_\_


Catalog No. \_\_\_\_\_

Date \_\_\_\_\_

With its aesthetically pleasing features, the TD300 combines style with functionality as it provides energy saving control of incandescent and fluorescent lighting, as well as certain motor loads such as fans, hot tub heaters and circulating pumps. The timer offers two presets for energy code compliance – two hour timing for Title 24 and IECC and 4 hour timing for ASHRAE 90.1. A timed override allows lights and HVAC (heating, ventilating and air conditioning) to remain on for a specified amount of time for after-hours cleaning crews. The TD300 is easy to install and can replace any wall switch.

## PRODUCT FEATURES

- Zero Arc Point Switching
- No minimum load requirement
- Adjustable time delay and sensitivity
- Walk test indicator
- Dual 120/277 VAC operation
- UL and cUL listed
- Title 24 compliant
- Five-year limited warranty
- 120-277 Vac

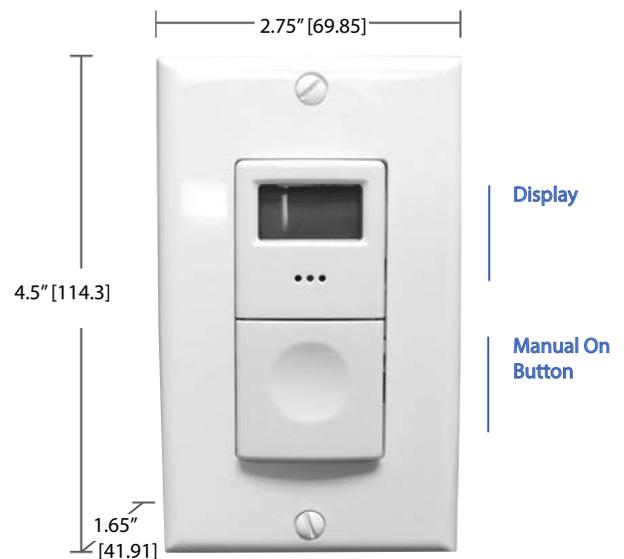


## General Specifications

---

Power requirements	120/230/277VAC; 50/60Hz
Electrical Ratings	120VAC - 15A Resistive - 10A Ballast - 1200W LED Lamp Driver - 8A Tungsten - 1/4HP Motor - 360VA Pilot Duty 277VAC - 15A Resistive - 15A Resistive - 10A Ballast
Load Requirements	None
Operating Environment	Indoor use only Operating environment: 32° - 122°F (0°-50°C) Relative humidity (non-condensing): 0%-95%
Construction	Casing – high impact injection-molded plastic Wall plate locks access to dipswitches for tamper resistance
Display	Backlit LED
Dimensions	4.5" [114.3mm] H x 2.75" [69.85mm] W x 1.625" [41.91mm] D
Weight	2.9 oz [82.21 g]
Color	White
Mounting	Single-gang NEMA-style switch box (average switch box) Decorator wall plate included
Certifications	UL and cUL listed
Warranty	Five-year limited

## Ordering Information

---

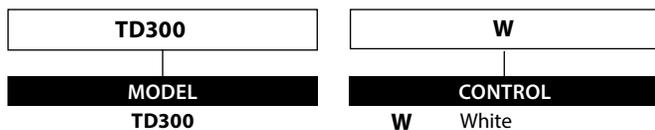

**HUBBELL**  
Control Solutions