imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SilvanChipElectronicsTech.Co.,Ltd.



Address: Fl.16 FuChang Building, Binhe Rd, Shenzhen, China

SC2272

SC2272 Description: (Compatible: PT2272)

SC2272 is a remote control decoder paired with SC2262 and SC2260 utilizing CMDS technology. It has 12 bits of tri-state address pins providing a maximum of 531, 441 address codes; thereby, drastically reducing any code collision and unauthorized code scanning possibilities. SC2272 is available in several options to suit every application need: variable number of data output pins, latch or momentary output type.


SC2272 Feat ur es: (Compatible: PT2272)

Low power consumption Wide operating temperature range: -30~70 °C Up to 12 tri-state code address pins Up to 6 data pins Single resistor oscillator Latch or momentary output type

SC2272 Appl i cat i ons: (Compat i bl e: PT2272)

| Home/motor car security system | Garage door controller |
|--------------------------------|------------------------|
| Remote fan controller | Remote control toys |

SC2272 Pin Configuration: (Compatible: PT2272)

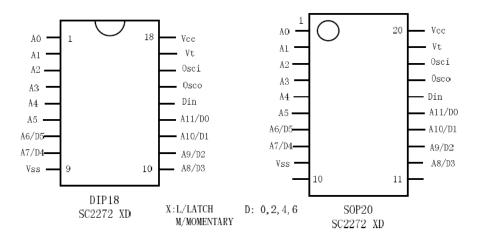



SilvanChipElectronicsTech.Co.,Ltd.

Tech Address: Fl.16 FuChang Building, Binhe Rd, Shenzhen, China

SC2272 PIN Description: (Compatible:PT2272)

(Definition: "1" Vcc "0" Vss "F" Floating) A0-A5 address pin tri-state adds. "0" "1"" F " A6/D5- A11/D0 address or data pin data output "0" ,"1" Din received signal input this pin Osci oscillator input pin Osco oscillator output pin Vt if received valid signal will "1" Vcc power positive 2- 6 V Vss power negative

SC2272 Characteristics: (Compatible:PT2272)

| Vcc -C |).3- 5 V | | Vi | -0.3- | - Vcc+0.3 V |
|---------|-----------|----------|-------|-------|-------------|
| Vo -(|).3- Vcc+ | 0.3 V | Pma | x 150 | 0 mW |
| lcc max | 0.02 uA | ./ | Osc | "F" / | 40-A11 "F" |
| loh min | -3 mA | /Vcc 5 V | | | |
| lol min | 2 Ma | /Vcc 5V | | | |
| Vih min | 0.7Vcc | | Vil n | nax | 0.3Vcc |

SC2272 Functions description: (Compatible:PT2272)

SC2272 decode signal from Din pin. If the code from SC2262 valid same as SC2272 set and received two times, the data pins will be "1" or "0" same as SC2262 data pins and will drive the confirm pin Vt to "1". The SC2272 code same as SC2262 means:

1、 the address pin state of SC2272 same as SC2262 .

2、 the oscillator frequency of SC2272 coordinate SC2262

SC2272 Code Description: (Compatible:PT2272)

1、There are 12 A/D BIT and 1 SYNC BIT in one frame

| L | | 32a | | |
|---------------------|----------|-----|-----|-----|
| l→ ^a ← | a=2*Fosc | | | |
| Fosc MM | wwww | www | mmm | MMM |
| A/D BIT"0" 4a | 12a | | | |
| A/D BIT"1" | 12a | 4a | | |
| A/D BIT "F" | ٦ | | | |
| SYNC BIT 4a | 7 | | | |
| | * | 1 | 28a | |
| | | | | |



SilvanChipElectronicsTech.Co.,Ltd.

Address: Fl.16 FuChang Building, Binhe Rd, Shenzhen, China

- 2、 "F" BIT only for address
- 3、 bit order A0 A1 A2 A3 A4 A5 A6/D5 A7/D4 A8/D3 A9/D2 A10/D1 A11/D0 SYNC


SC2272 Single resistor oscillator: (Compatible:PT2272) Outside resistor with inside circuit become oscillator.

SC2262 and SC2272 oscillator coordinate as follow:

| SC2262 | Rosc 4.7M | SC2272 Rosc | 820K |
|--------|-----------|-------------|------|

| | 0011/1/0000 | 02010 |
|------|-------------|-------|
| 1.2M | | 220K |
| 1.5M | | 270K |

SC2272 Latch and momentary output: (Compatible:PT2272)

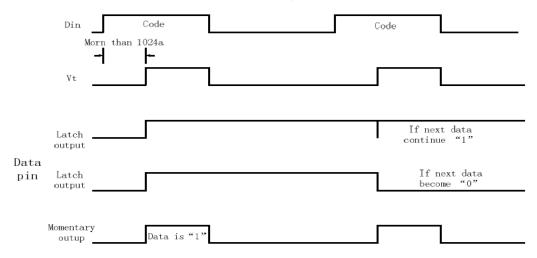

SC2272 APPLICATIONS CIRCUIT: (Compatible:PT2272)

