



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Features

- ◆ 2" x 1" metal package
- ◆ Ultra wide 4:1 input voltage range  
9–36, 18–75, 43–160 VDC
- ◆ EN 50155 approval for railway applications
- ◆ Thermal shock and vibration resistant according EN 61373
- ◆ Input filter meets EN 55032 class B without external components
- ◆ High efficiency up to 89%
- ◆ No minimum load required
- ◆ Operating temperature range  
–40°C to +85°C
- ◆ Under voltage lock-out circuit
- ◆ Remote On/Off
- ◆ Output voltage adjustable
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty



The TEN 20WIR series is a family of high performance 20 Watt dc/dc converter modules featuring ultra wide 4:1 input voltage ranges in a 2" x 1" package with industry-standard footprint. Input voltages up to 160 VDC, excellent EMC characteristics and EN 50155 approval make this product the best choice for many demanding applications in railroad and transportation systems. Further standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. Low input current characteristics at minimal load make these converters also the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/datacom, industry control systems and measurement equipments.

### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 20-2410WIR	<b>9 – 36 VDC</b> (24 VDC nominal)	3.3 VDC	4500 mA	85 %
TEN 20-2411WIR		5.0 VDC	4000 mA	88 %
TEN 20-2412WIR		12 VDC	1670 mA	89 %
TEN 20-2413WIR		15 VDC	1330 mA	88 %
TEN 20-2422WIR		±12 VDC	±833 mA	88 %
TEN 20-2423WIR		±15 VDC	±667 mA	89 %
TEN 20-4810WIR	<b>18 – 75 VDC</b> (48 VDC nominal)	3.3 VDC	4500 mA	85 %
TEN 20-4811WIR		5.0 VDC	4000 mA	88 %
TEN 20-4812WIR		12 VDC	1670 mA	89 %
TEN 20-4813WIR		15 VDC	1330 mA	89 %
TEN 20-4822WIR		±12 VDC	±833 mA	88 %
TEN 20-4823WIR		±15 VDC	±667 mA	89 %
TEN 20-7210WIR	<b>43 – 160 VDC</b> (110 VDC nominal)	3.3 VDC	4500 mA	85 %
TEN 20-7211WIR		5.0 VDC	4000 mA	87 %
TEN 20-7212WIR		12 VDC	1670 mA	88 %
TEN 20-7213WIR		15 VDC	1330 mA	88 %
TEN 20-7222WIR		±12 VDC	±833 mA	88 %
TEN 20-7223WIR		±15 VDC	±667 mA	89 %

### Input Specifications

Input current (no load)	24 Vin models: 6 mA typ. 48 Vin models: 4 mA typ. 110 Vin models: 3 mA typ.
Start-up voltage	24 Vin models: 9.0 VDC (or lower) 48 Vin models: 18 VDC (or lower) 110 Vin models: 43 VDC (or lower)
Under voltage shut down (lock-out circuit)	24 Vin models: 8.0 VDC typ. 48 Vin models: 16 VDC typ. 110 Vin models: 40 VDC typ.
Surge voltage (1 sec.)	24 Vin models: 50 V max. 48 Vin models: 100 V max. 110 Vin models: 170 V max.
Reflected ripple current	30 mA <sub>p-p</sub> typ.
Conducted noise	24 & 48 Vin models: EN 55032 class B without external components 110 Vin models: EN 55032 class A without external components
EMC immunity	EN 50121-3-2 EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV perf. criteria A 24 & 48 Vin models: Nippon chemi-con KY 220 µF, 100 V, ESR 48 mOhm 110 Vin models: Rubycon BXF series, 100 µF / 250 V EN 61000-4-6, 10 V <sub>rms</sub> , perf. criteria A
	– ESD (electrostatic discharge)
	– Radiated immunity
	– Fast transient / surge (with external input capacitor)
	– Conducted immunity

### Output Specifications

Voltage set accuracy	±1 %
Voltage adjustment range	±10 % (single output models only)
Regulation	– Input variation V <sub>min</sub> - V <sub>max</sub> single output models: 0.2 % max. dual output models: 0.5 % max. – Load variation 0 – 100 % single output models: 0.2 % max. dual output models: 1 % max. (balanced load) 5 % max. (load cross variation 25 % / 100 %)
Minimum load	not required
Temperature coefficient	±0.02 %/K
Ripple and noise (20 MHz bandwidth, measured with 1 µF/ 50 V MLCC)	3.3 & 5.0 VDC models: 75 mV <sub>p-p</sub> typ. other models: 100 mV <sub>p-p</sub> typ.
Start up time	– Power On 30 ms typ. – Remote On 30 ms typ.
Transient response (25% load step change)	250 µs typ.
Short circuit protection	indefinite (automatic recovery)
Over load protection	150 % of I <sub>out</sub> max. typ.
Over voltage protection (only single output models)	3.3 VDC models: 3.7 – 5.4 V 5 VDC models: 5.6 – 7.0 V 12 VDC models: 13.5 – 19.6 V 15 VDC models: 16.8 – 20.5 V

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

### Output Specifications


Capacitive load	3.3 VDC models:	7000 $\mu$ F
	5.0 VDC models:	5000 $\mu$ F
	12 VDC models:	850 $\mu$ F
	15 VDC models:	700 $\mu$ F
	$\pm$ 12 VDC models:	500 $\mu$ F (each output)
	$\pm$ 15 VDC models:	350 $\mu$ F (each output)

### General Specifications


Temperature ranges	<ul style="list-style-type: none"> <li>- Operating</li> <li>- Case temperature</li> <li>- Storage</li> </ul>	-40°C to +85°C (with derating) +105°C max. -55°C to +125°C
Power derating	<ul style="list-style-type: none"> <li>- Natural convection</li> <li>- Natural convection with heat sink (optional)</li> </ul>	4.5 %/K above 73°C 5.3 %/K above 78°C
Thermal impedance	<ul style="list-style-type: none"> <li>- Natural convection</li> <li>- Natural convection with heat sink (optional)</li> </ul>	12°C/W 10°C/W
Humidity (non condensing)		5 - 95 % rel. H max.
Isolation voltage (60 sec.)	<ul style="list-style-type: none"> <li>- Input / Output</li> <li>- Input / Case</li> </ul>	2250 VDC 1600 VDC
Isolation resistance	- Input / Output	>1000 M Ohm
Isolation capacitance	- Input / Output	3000 pF max.
Switching frequency		330 kHz typ. (pulse width modulation PWM)
Thermal shock, mechanical shock & vibration	<ul style="list-style-type: none"> <li>- Test conditions</li> </ul>	EN 61373, MIL-STD-810F <a href="http://www.tracopower.com/products/mil810.pdf">www.tracopower.com/products/mil810.pdf</a>
Safety standards	<ul style="list-style-type: none"> <li>- Certification documents</li> </ul>	UL/cUL 60950-1, IEC/EN 60950-1, EN 50155 <a href="http://www.tracopower.com/overview/ten20wir">www.tracopower.com/overview/ten20wir</a>
Remote On/Off	<ul style="list-style-type: none"> <li>- On:</li> <li>- Off:</li> <li>- Off idle current:</li> </ul>	3.0 ... 15 VDC or open circuit 0 ... 1.2 VDC or short circuit pin 2 and pin 6 2.5 mA
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		1.5 Mio. h
Environmental compliance	<ul style="list-style-type: none"> <li>- Reach</li> <li>- RoHS</li> <li>- Flamability identified acc. EN 45545-2</li> </ul>	<a href="http://www.tracopower.com/products/reach-declaration.pdf">www.tracopower.com/products/reach-declaration.pdf</a> RoHS directive 2011/65/EU <a href="http://www.tracopower.com/info/en45545-declaration.pdf">www.tracopower.com/info/en45545-declaration.pdf</a>

### Output Voltage Adjustment (for single output models only)

#### Trim up



#### Trim down



Nominal output voltage at open Trim input  
adjustment range  $\pm$ 10%, Ru, Rd to be advised


**Application note:** [www.tracopower.com/overview/ten20wir](http://www.tracopower.com/overview/ten20wir)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	copper, nickel plated
Baseplate material	non conductive FR4
Potting material	silicon (UL94V-0 rated)
Weight	30 g (1.06 oz)
Soldering temperature	max. +265°C / 10 sec.

**Outline Dimensions**

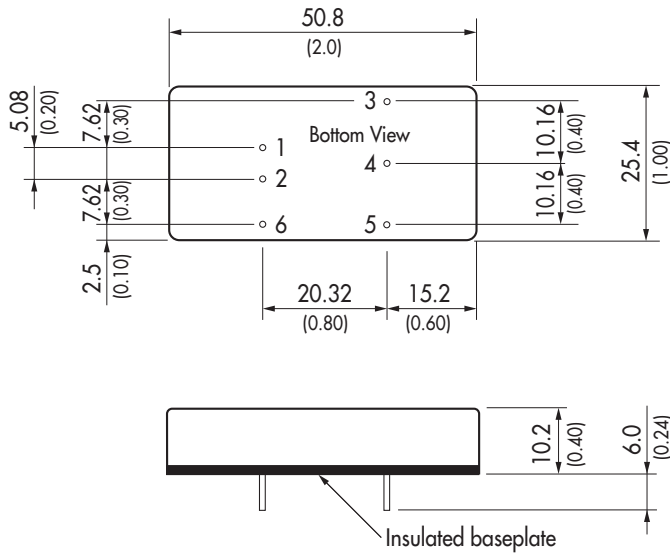


Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	




Dimensions in [mm], ( ) = Inch  
 Pin diameter: 1.0 ±0.1 (0.04 ±0.004)  
 Pin pitch tolerances: ±0.25 (±0.01)  
 Case tolerances: ±0.5 (±0.02)

**Heat-Sink (Option)**

**Order code:** TEN-HS1  
 (cont.: heat-sink, thermal pad, 2 clamps)  
**Material:** Aluminum  
**Finish:** Anodic treatment (black)  
**Weight:** 17 g (0.60oz) without converter  
 Thermal impedance after assembling: 10 K/W



**Note:**  
 Before attaching the heatsink, the product label on converter has to be removed for optimal performance.  
 For volume orders we can supply the converters with heatsink already mounted.  
 Please contact us for a relative quotation.

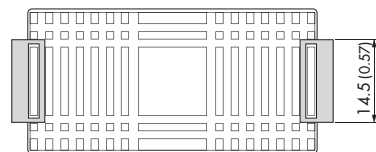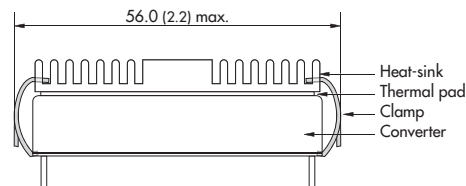

Dimensions in mm, ( ) = Inch

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)