imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SPECIFICATION

Part No.	:	TG.22.0221
Product Name	:	2G/3G Penta-Band Cellular Connector Mount Monopole Antenna Straight FME Female Connector 824 MHz ~ 2170 MHz
Features	:	Works with GSM/GPRS/CDMA/HSPA/UMTS/EDGE Omni-Directional Robust and Compact OdBi Gain for lower cellular bands, 4dBi for higher cellular bands FME(F) Straight, 50 ohms 52.3*7.8 mm RoHS Compliant





1. INTRODUCTION

The TG.22 2G/3G Penta-band from 824MHz to 2170MHz monopole antenna is a quality robust antenna with high gain in small form factor.

Connection is made via straight FME(F) connector with a hardened TPEE casing, this antenna is a good compact 2G/3G antenna for remote monitoring devices or telematics applications.

The TG.22.0221 antenna has been tuned specifically for optimum efficiency when connected directly to the Sierra Wireless Airlink GL series programmable module.

2. SPECIFICATION

ELECTRICAL									
Standard	GSM Penta-Band								
Operation Frequency (MHz)	824-896	880-960	1710-1880	1850-1990	1920-2170				
Polarization			Linear						
Impedance			50 ohm						
VSWR	3:1	2:1	2:1	2:1	3:1				
Return Loss (dB)	<-5dB	<-5dB	<-10dB	<-10dB	<-10dB				
Efficiency (%)	49.47	47.33	72.17	72.95	70.32				
Gain (dBi)	0.88	0.88	3.86	4.42	4.42				
Average Gain (dB)	-3.08	-3.30	-1.42	-1.37	-1.54				
Max Input Power			5W						

* The TG.22 antenna performance was measured on a 62*46.5 mm evaluation board

MECHANICAL						
Dimensions (mm)	52.3*7.8					
Required Space (mm)	52.3*7.8					
Material	TPEE					
Connector	FME(F) ST					
Weight	8g					
Recommended Torque for Mounting	0.78N·m					
Max Torque for Mounting	1.47N⋅m					
ENVIRONMENTAL						
Operation Temperature	-40°C to 85°C					
Storage Temperature	-40°C to 85°C					
Relative Humidity	40% to 95%					
RoHs Compliant	Yes					




3. TEST SET UP




Figure 1. Impedance measurements (left hand) and peak gain, efficiency and radiation pattern measurements (right hand).

4. ANTENNA PARAMETERS

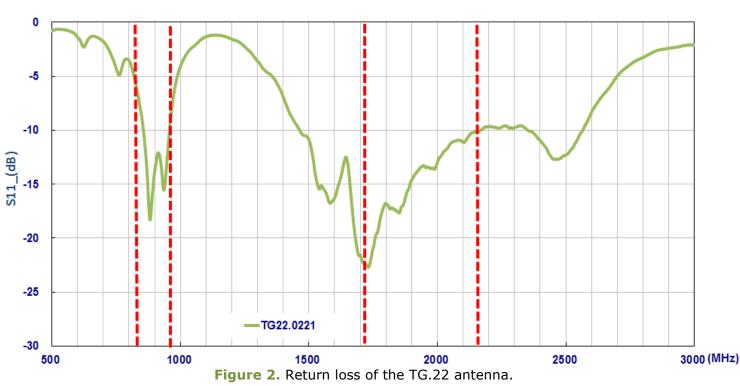


4.1. Return Loss



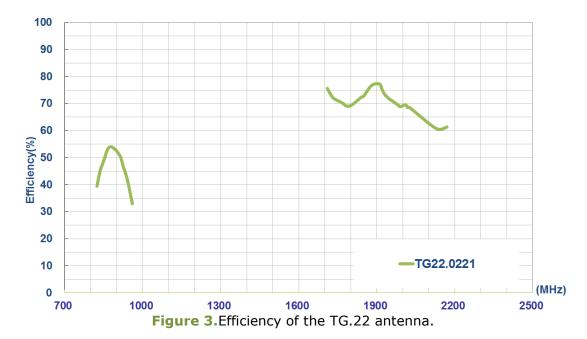


4.2. Efficiency



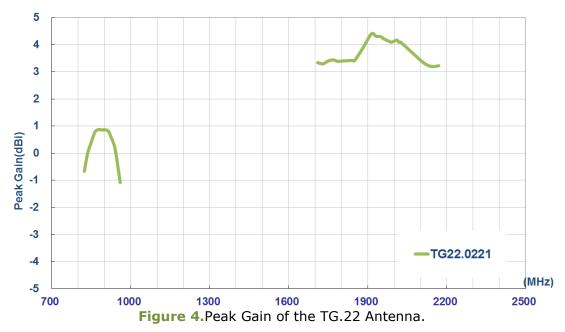



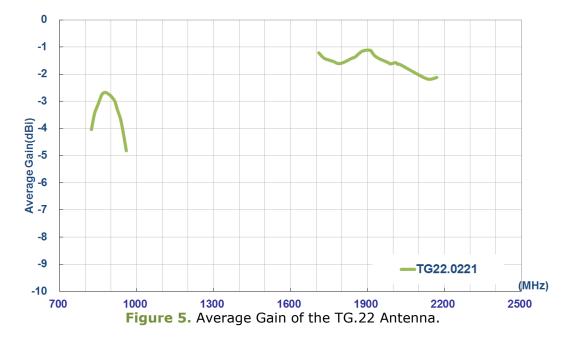


4.4. Average Gain





5. Antenna Radiation Patterns

5.1.

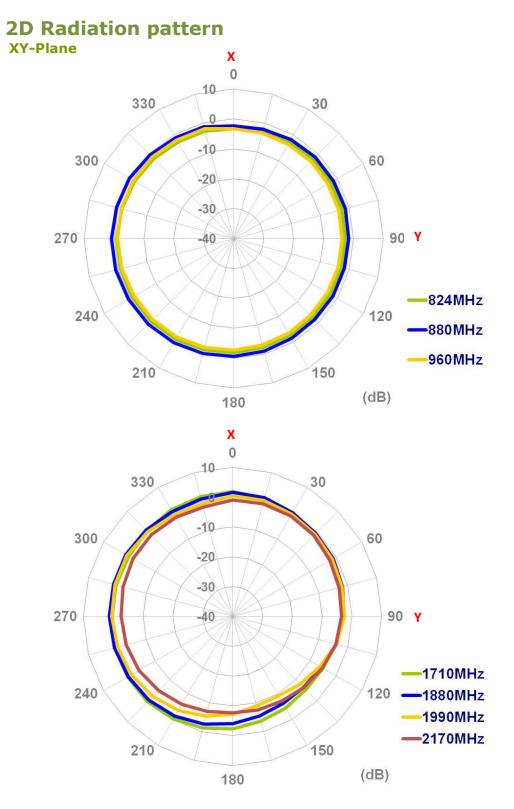




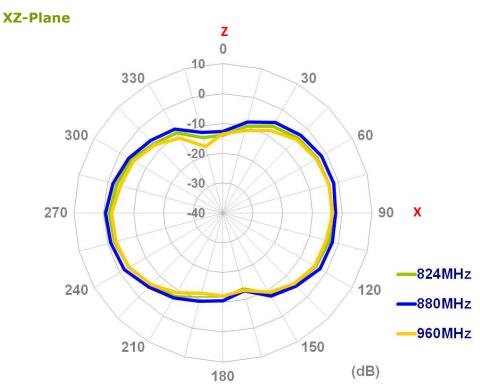

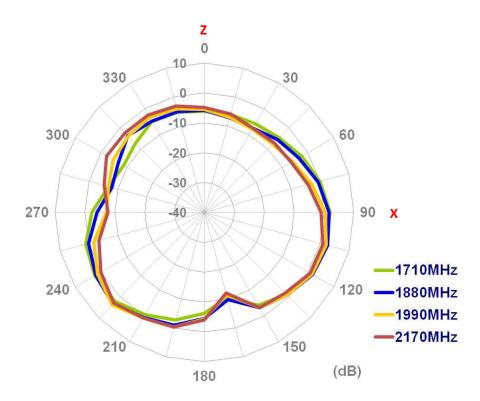



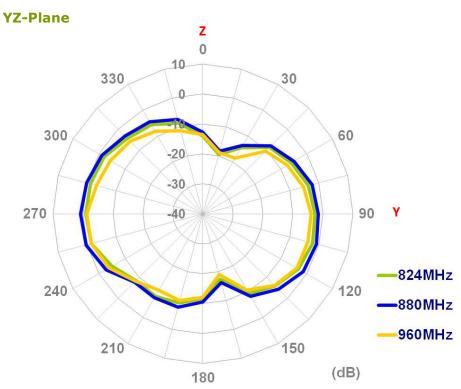


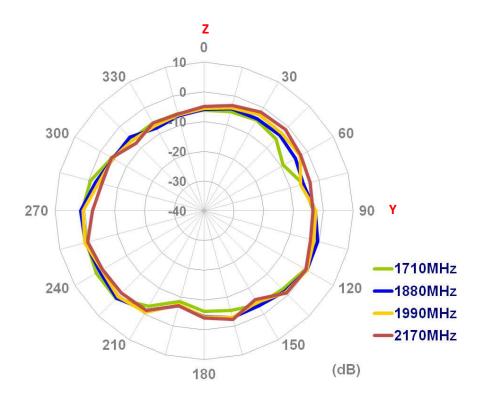


Figure 6. 2D Radiation Pattern of the TG.22 Antenna.




6. Mechanical Drawing

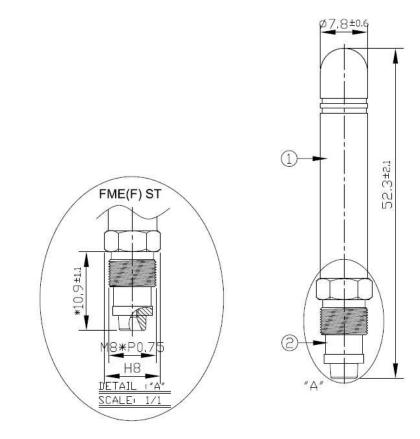

	Name	P/N	Materla	Finish	QTY
(1)	Antenna Housing	000111F030002A	TPEE	Black	1
\bigcirc	FME(F) ST	211614D000002A	Brass	NI Plated	1

Figure 7. Mechanical Drawings of the TG.22



62mm Figure 8. TG.22 Antenna EVB



7. Installation Guide

Recommended Torque for Mounting 0.78N·m

Maximum Torque for Mounting 1.47N⋅m





8. Packaging

Put 1pcs TG.22 antenna per small PE bag, 100 small PE bags put in one big PE bag. Final package will have 100pcs TG.22 antennas in the big PE bag.

