# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Subminiature slide switches



5MTG-1803

### DISTINCTIVE FEATURES

Single piece case

Epoxy sealed terminals

Washable version available

Wide variety of contact materials

Same PCB layout as TL, TP and TR subminiature series



#### ELECTRICAL SPECIFICATIONS

- Current/voltage rating with resistive load :
- Gold plated contacts : 0.4 VA 20V max. AC or DC
- Silver plated contacts : 0.5 A 48V max. AC or DC
- Contact resistance : 20 m $\Omega$  max.
- Insulation resistance : 1,000  $\text{M}\Omega$  min. at 500 VDC
- Dielectric strength : 1,000 Vrms 50 Hz min. between terminals and frame 500 Vrms 50 Hz min. between terminals
- Electrical life at full load :
  2 position switches : 60,000 cycles
  3 position switches : 30,000 cycles



### GENERAL SPECIFICATIONS

- Travel : 2.60 mm (.102)
- Wave soldering : 260 °C (500 °F) 5 sec. max.
- Operating temperature : -30 °C to +85 °C (-22 °F to +185 °F)
- Cleaning : solvents or water + detergent

### D MATERIALS


- Case : flame retardant thermoplastic
- Actuator : thermoplastic
- Ground plate and bracket : brass, tin plated
- Contacts and terminals : see next page
- Rubber seal : silicone, transparent
- Terminal seal : epoxy

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components. The company reserves the right to change specifications without notice.





Subminiature slide switches

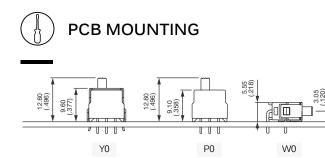




### ELECTRICAL FUNCTIONS



2

### Subminiature slide switches

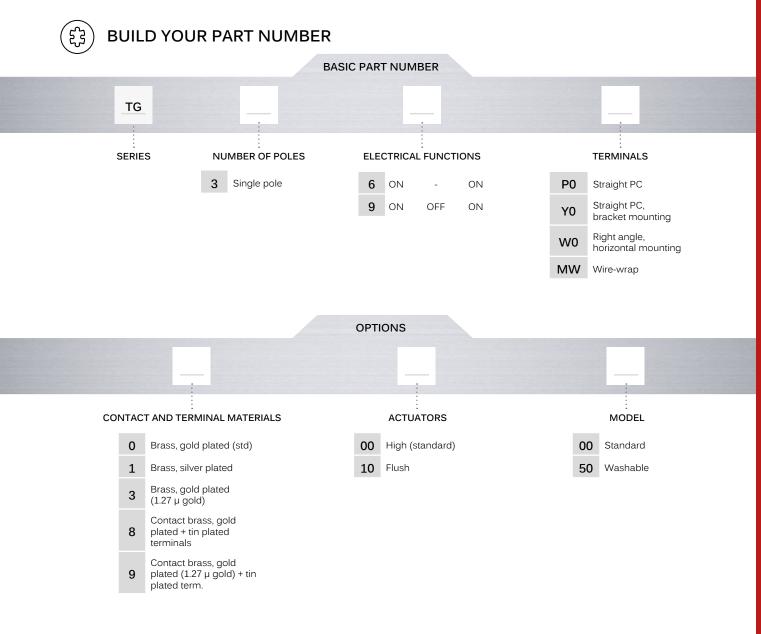


### ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers of switches and options in the same order as in above chart.


() Notice : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

#### Subminiature slide switches

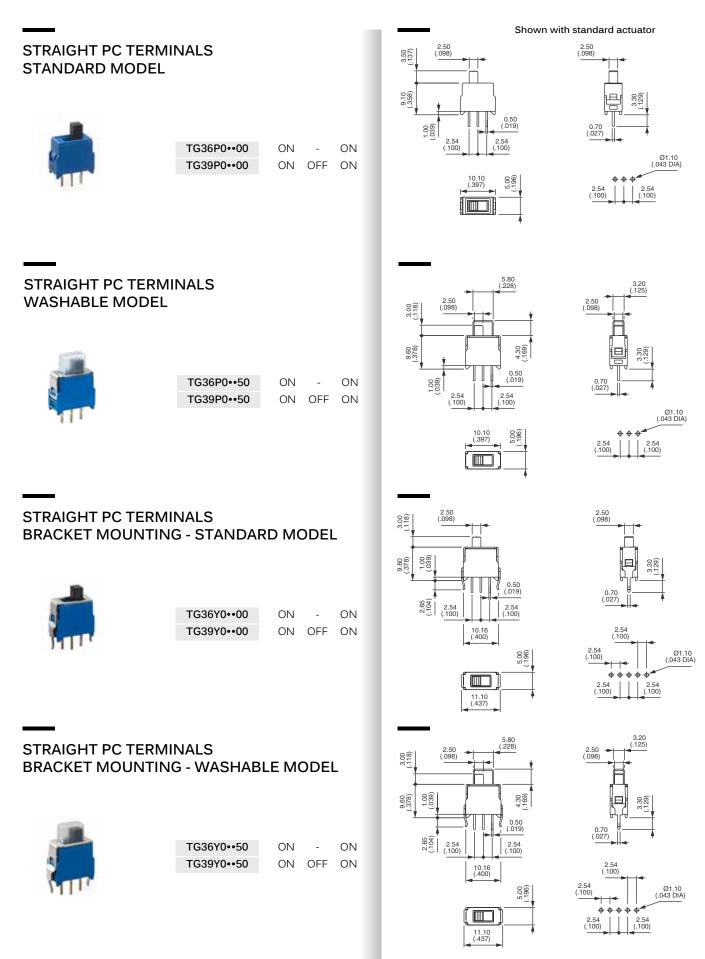

4

#### Subminiature slide switches

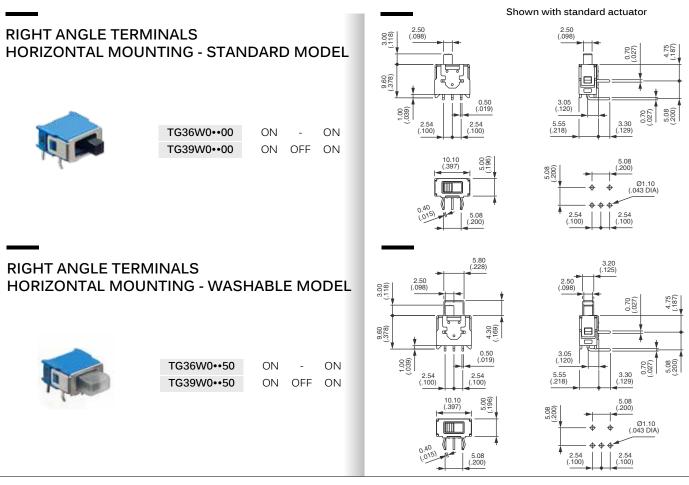

#### CONTACT AND TERMINAL

	MATERIALS	
BASIC P/N	 ······ 00 or 50	

To order a product, replace first • of the part number with one of the following codes.

- **0** Brass, gold plated (standard)
- 1 Brass, silver plated
- **3** Brass, gold plated (1.27 μ gold)
- 8 Contact brass, gold plated + tin plated terminals
- 9 Contact brass, gold plated (1.27 µ gold) + tin plated terminals

#### ACTUATORS

	_	
BASIC P/N	 	 00 or 50

To order a product, replace second • of the part number with one of the following codes.

- 00 High actuator (standard)
- 10 Flush actuator