



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Ultra wide 4:1 input voltage 6 W DC/DC converter in a compact DIP-24 plastic case
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2×MOPP
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Low leakage current < 2µA
- Extended operating temperature range -40°C to 90°C.
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- Operating up to 5000m altitude
- 5 year product warranty



The THM-6WI series is a range of medical 6 Watt DC/DC converters in DIP-24 plastic package and with ultra-wide 4:1 input voltage range. They provide a reinforced isolation system for 5000 VACrms isolation and a very low leakage current of less than 2 µA. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 × MOPP (Means Of Patient Protection) and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 87% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +90°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

| Models | | | | |
|--------------|----------------------------------|----------------|---------------------|-----------------|
| Order code | Input voltage range | Output voltage | Output current max. | Efficiency typ. |
| THM 6-0510WI | 4.5 – 9 VDC (5 VDC nominal) | 3.3 VDC | 1800 mA | 82.5 % |
| THM 6-0511WI | | 5.0 VDC | 1200 mA | 86.0 % |
| THM 6-0512WI | | 12 VDC | 500 mA | 86.0 % |
| THM 6-0513WI | | 15 VDC | 400 mA | 86.0 % |
| THM 6-0515WI | | 24 VDC | 250 mA | 86.5 % |
| THM 6-0521WI | | ±5.0 VDC | ±600 mA | 84.0 % |
| THM 6-0522WI | | ±12 VDC | ±250 mA | 86.5 % |
| THM 6-0523WI | | ±15 VDC | ±200 mA | 87.5 % |
| THM 6-2410WI | 9.0 – 36 VDC (24 VDC nominal) | 3.3 VDC | 1800 mA | 83.0 % |
| THM 6-2411WI | | 5.0 VDC | 1200 mA | 86.5 % |
| THM 6-2412WI | | 12 VDC | 500 mA | 89.0 % |
| THM 6-2413WI | | 15 VDC | 400 mA | 89.0 % |
| THM 6-2415WI | | 24 VDC | 250 mA | 88.5 % |
| THM 6-2421WI | | ±5.0 VDC | ±600 mA | 85.0 % |
| THM 6-2422WI | | ±12 VDC | ±250 mA | 88.5 % |
| THM 6-2423WI | | ±15 VDC | ±200 mA | 88.0 % |
| THM 6-4810WI | 18 – 75 VDC (48 VDC nominal) | 3.3 VDC | 1800 mA | 82.5 % |
| THM 6-4811WI | | 5.0 VDC | 1200 mA | 86.5 % |
| THM 6-4812WI | | 12 VDC | 500 mA | 88.0 % |
| THM 6-4813WI | | 15 VDC | 400 mA | 89.0 % |
| THM 6-4815WI | | 24 VDC | 250 mA | 88.0 % |
| THM 6-4821WI | | ±5.0 VDC | ±600 mA | 85.0 % |
| THM 6-4822WI | | ±12 VDC | ±250 mA | 88.0 % |
| THM 6-4823WI | | ±15 VDC | ±200 mA | 88.0 % |

Input Specifications

| | |
|------------------------------|---|
| Input current no load | 5 Vin models: 20 mA typ. 24 Vin models: 6 mA typ. 48 Vin models: 4 mA typ. |
| Surge voltage (3 s max.) | 5 Vin models: 16 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max. |
| Start-up voltage | 5 Vin models: 4.5 VDC (or lower) 24 Vin models: 9 VDC (or lower) 48 Vin models: 18 VDC (or lower) |
| Startup time | 30 ms |
| Under voltage shut down | 5 Vin models: 4 VDC typ. 24 Vin models: 8 VDC typ. 48 Vin models: 16 VDC typ. |
| EMC emissions | – Conducted & Radiated input suppression – Application note for filter class B proposal EN 55011 limits to IEC 60601-1-2 4th edition EN 55032 class A (internal filter) www.tracopower.com/overview/thm6wi |
| EMC immunity | – Generic for Medical equipment – ESD (electrostatic discharge) – Radiated immunity – Fast transient / surge (with external input capacitor / diode) – Conducted immunity – Magnetic field immunity IEC/EN 60601-1-2 4th edition EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV perf. criteria A 5 Vin models: Nippon chemi-con KY 1000 µF/ 25 V and reverse diode (Vishay V10P45) in parallel 24 Vin models: Nippon chemi-con KY 470 µF/ 50 V 48 Vin models: Nippon chemi-con KY 330 µF/ 100 V EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A |
| External input fuse required | 5 Vin models: 5 A (slow blow type) 24 Vin models: 2.5 A (slow blow type) 48 Vin models: 1.5 A (slow blow type) |

Output Specifications

| | |
|-------------------------------------|--|
| Voltage set accuracy | ±1 % max. |
| Regulation | – Input variation – Load variation (0 – 100 %) – Cross regulation single output: 0.2 % max. dual output: 0.5 % max. single output: 0.2 % max. dual output: 1.0 % max. dual output: 5.0 % max. (asymmetrical load 25/100%) |
| Minimum load | not required |
| Ripple and noise (20 MHz Bandwidth) | 3.3 & 5.0 Vout models: 30 mVp-p typ. with cap. 10 µF/25V X7R MLCC 12 & 15 Vout models: 40 mVp-p typ. with cap. 10 µF/25V X7R MLCC 24 Vout models: 50 mVp-p typ. with cap. 4.7 µF/50V X7R MLCC |
| Transient response | – Recovery time (25% load step change) 250 µs typ. |
| Over load protection | at 150 % typ. of Iout rated (hiccup mode) |
| Short circuit protection | Continuous, automatic recovery |
| Over voltage protection | – Single output – Dual output 3.3 Vout models: 3.7 – 5.4 VDC 5.0 Vout models: 5.6 – 7.0 VDC 12 Vout models: 13.5 – 19.6 VDC 15 Vout models: 18.3 – 22.0 VDC 24 Vout models: 29.1 – 32.5 VDC ±5 Vout models: 5.6 – 7.0 VDC ±12 Vout models: 13.5 – 18.2 VDC ±15 Vout models: 17.0 – 22.0 VDC |

General Specifications

| | | | |
|--|-------------------------------------|--|---------------------------|
| Capacitive load | – Single output | 3.3 Vout models: | 2'100 µF max. |
| | | 5.0 Vout models: | 1'500 µF max. |
| | | 12 Vout models: | 260 µF max. |
| | – Dual output | 15 Vout models: | 210 µF max. |
| | | 24 Vout models: | 75 µF max. |
| | | ±5 Vout models: | 860 µF max. (each output) |
| | | ±12 Vout models: | 150 µF max. (each output) |
| | | ±15 Vout models: | 110 µF max. (each output) |
| Temperature ranges | – Operating (designed for) | –40°C to +90°C (without derating) | |
| | – Rated according to IEC/EN 60601-1 | –40°C to +70°C (without derating) | |
| | – Case temperature | +105°C max. | |
| | – Storage temperature | –55°C to +125°C | |
| Thermal impedance | | 18°C/W | |
| Humidity (non condensing) | | 5 % to 95 % rel H max. | |
| Isolation voltage (50 Hz, 60 s) | – to meet ES/IEC/EN 60601-1 | 5000 VACrms, rated for 250 VACrms working voltage, 2 × MOPP | |
| Clearance/creepage | | 8 mm min. | |
| Leakagecurrent (at 240VAC, 60Hz) | | 2 µA max. | |
| Isolation capacitance (input/output) | | 17 pF max. | |
| Altitude during operation | | 5000 m | |
| Temperature coefficient | | ±0.02 %/K typ. | |
| Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign) | | 4'700'000 h | |
| Switching frequency | | 250 kHz ±25 kHz (pulse width modulation) | |
| Vibration and thermal shock resistance | | according to MIL-STD-810F | |
| Safety standards/approvals – Medical equipment | | ANSI/AAMI ES60601-1:2005/(R)2012, IEC/EN60601-1 3rd edition | |
| | – Certification documents | www.tracopower.com/overview/thm6wi | |
| Environmental compliance | – Reach | www.tracopower.com/info/reach-declaration.pdf | |
| | – RoHS | RoHS directive 2011/65/EU | |

Physical Specifications

| | |
|-----------------------|------------------------------|
| Casing material | non-conductive black plastic |
| Base material | non-conductive black plastic |
| Potting material | silicone (UL94 V-0 rated) |
| Package weight | 14 g (0.48 oz) |
| Soldering temperature | 265°C / 10 s max. |




- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


Outline Dimensions

Standard pinning

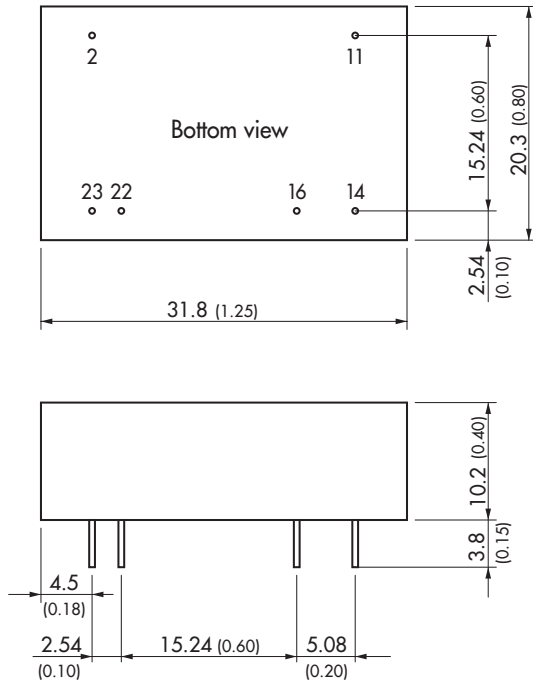

| Standard Pinout | | |
|-----------------|------------|------------|
| Pin | Single | Dual |
| 2 | -Vin (GND) | -Vin (GND) |
| 11 | No con. | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Common |
| 22 | +Vin (Vcc) | +Vin (Vcc) |
| 23 | +Vin (Vcc) | +Vin (Vcc) |

Optional pinning: suffix **-A1**

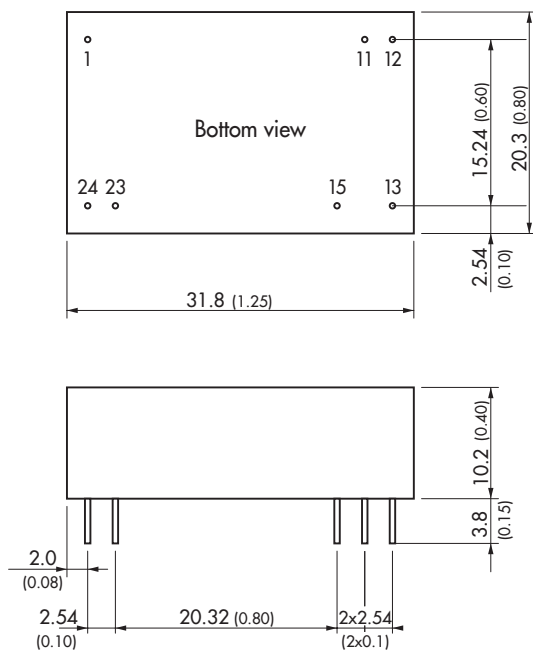

| Optional Pinout | | |
|-----------------|------------|------------|
| Pin | Single | Dual |
| 1 | +Vin (Vcc) | +Vin (Vcc) |
| 11 | No pin | Common |
| 12 | -Vout | No pin |
| 13 | +Vout | -Vout |
| 15 | No pin | +Vout |
| 23 | -Vin (GND) | -Vin (GND) |
| 24 | -Vin (GND) | -Vin (GND) |

Remark: No suffix **-A1** for 5 Vin models. Corresponding parts are with THM 6 series by default. see www.tracopower.com/overview/thm6

Dimensions in [mm], () = Inch
 Tolerances ± 0.5 (± 0.02)
 Pin $\varnothing 0.6 \pm 0.1$ (0.024 ± 0.004)
 Pin pitch tolerances ± 0.25 (± 0.01)