

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







TIG074E8

ON Semiconductor®

http://onsemi.com

N-Channel IGBT 400V, 150A, VCE(sat); 3.8V Single ECH8

Features

- · Low-saturation voltage
- · Enhansment type
- Mounting Height 0.9mm, Mounting Area 8.12mm²
- · Halogen free compliance

- Low voltage drive (2.5V)
- · Built-in Gate to Emitter protection diode
- · dv / dt guarantee*

Application

· Light-Controlling Flash Applications

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	P-channel	Unit
Collector to Emitter Voltage	VCES		400	V
Gate to Emitter Voltage (DC)	VGES		±4	V
Gate to Emitter Voltage (Pulse)	VGES	PW≤1ms	±5	V
Collector Current (Pulse)	ICP	V _{GE} =2.5V, C _M =200μF	150	Α
Maximum Collector to Emitter dv / dt	dv / dt	Turn off I _C =150A, V _C E≤320V, starting Tch=25°C	400	V/μs
Channel Temperature	Tj		150	°C
Storage Temperature	Tstg		-40 to +150	°C

^{*:} Concerning dv / dt (slope of Collector Voltage at the time of Turn-OFF), will be 100% screen-detected in the circuit shown as Fig. 1.


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			Unit
Farameter		Conditions	min	typ	max	Uill
Collector to Emitter Breakdown Voltage	V(BR)CES	IC=2mA, VGE=0V	400			V
Collector to Emitter Cutoff Current	ICES	V _{CE} =320V, V _{GE} =0V			10	μΑ
Gate to Emitter Leakage Current IGES		V _{GE} =±4V, V _{CE} =0V			±10	μΑ
Gate to Emitter Threshold Voltage	V _{GE} (off)	V _{CE} =10V, I _C =1mA	0.4		0.9	V
Collector to Emitter Saturation Voltage	VCE(sat)	IC=100A, VGE=2.5V		3.8	5.4	V
Input Capacitance	Cies			3100		pF
Output Capacitance	Coes	V _{CE} =10V, f=1MHz		32		pF
Reverse Transfer Capacitance	Cres			24		pF

ORDERING INFORMATION

See detailed ordering and shipping information on page 5 of this data sheet.

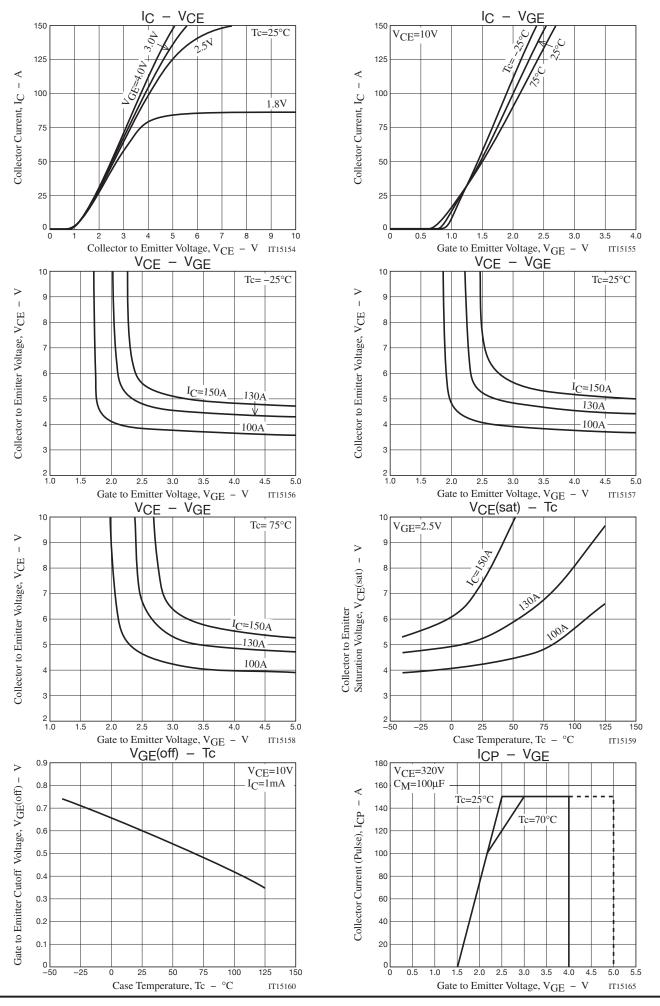


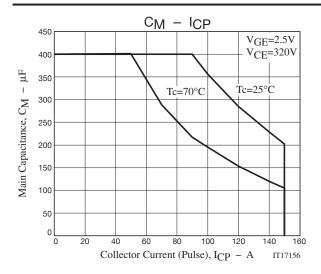


Fig.1 Large Current R Load Switching Circuit

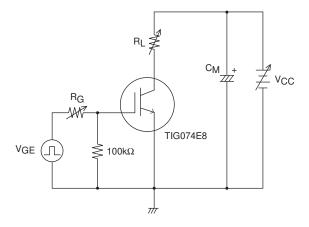


Note1. The collector voltage gradient dv / dt - Turn off Ic safety movement domain to protect the device of Gate-series resistor RG when it is turned off.

Definition of dv/dt


dv/dt is defined as the maximum slope of the below VCE curve during turn-off period. dv/dt= Δ VCE/ Δ t= Δ VCE/100ns

Overall waveform

Enlarged picture of turn-off period

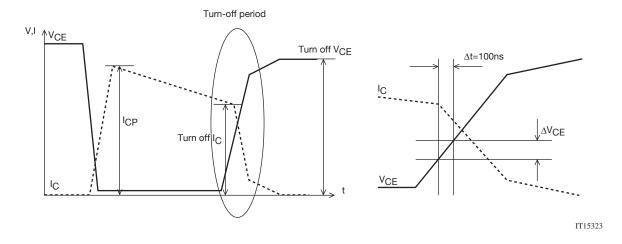

Definition of Switching Time

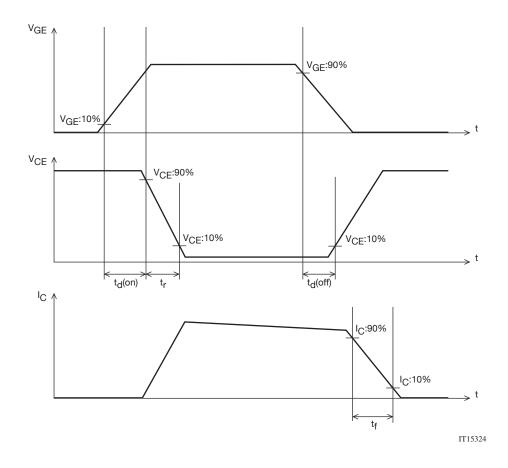

Package Dimensions


TIG074E8-TL-H


SOT-28FL/ECH8


CASE 318BF ISSUE O


Unit : mm


- 1: Emitter
- 2: Emitter
- 3: Emitter
- 4: Gate
- 5: Collector
- 6: Collector
- 7: Collector
- 8: Collector

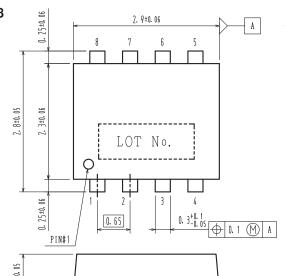










Ordering & Package Information

_	-			
Device	Package	Shipping	memo	
TIG074E8-TL-H	ECH8	3,000 pcs./reel	Pb-Free and Halogen Free	


Packing Type: TL

Marking





Electrical Connection



Note on usage: TIG074E8 has protection diode between gate and emitter but handling it requires sufficient care to be taken.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equa