



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



- Compact SMD-16-package
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2×MOPP and operation to 5000 m altitude
- Low leakage current < 2 µA for BF-applications
- Extended operating temperature range -40°C to 90°C.
- EMC compliance to IEC 60601-1-2 4th edition and EN55032 class A
- 5-year product warranty



The TIM 3.5SM series is a range of 3.5 Watt DC/DC converters in compact SMD package and with reinforced isolation of 5000 VACrms for medical applications. With a low leakage current of less than 2 µA the converters are predestined to insulate electrical equipment from the applied parts to patient (BF classification). The models are approved to IEC/EN/ES 60601-1 3rd edition for 2×MOPP up to an altitude of 5000m and come along with an ISO 14971 risk management file.

Models				
Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TIM 3.5-0911SM	4.5 – 12 VDC (9 VDC nominal)	5.0 VDC	700 mA	77 %
TIM 3.5-0919SM		9.0 VDC	389 mA	78 %
TIM 3.5-0912SM		12 VDC	292 mA	81 %
TIM 3.5-0913SM		15 VDC	234 mA	81 %
TIM 3.5-0915SM		24 VDC	146 mA	81 %
TIM 3.5-0922SM		±12 VDC	±146 mA	81 %
TIM 3.5-0923SM		±15 VDC	±117 mA	81 %
TIM 3.5-1211SM	9.0 – 18 VDC (12 VDC nominal)	5.0 VDC	700 mA	79 %
TIM 3.5-1219SM		9.0 VDC	389 mA	80 %
TIM 3.5-1212SM		12 VDC	292 mA	82 %
TIM 3.5-1213SM		15 VDC	234 mA	82 %
TIM 3.5-1215SM		24 VDC	146 mA	82 %
TIM 3.5-1222SM		±12 VDC	±146 mA	82 %
TIM 3.5-1223SM		±15 VDC	±117 mA	82 %
TIM 3.5-2411SM	18 – 36 VDC (24 VDC nominal)	5.0 VDC	700 mA	79 %
TIM 3.5-2419SM		9.0 VDC	389 mA	80 %
TIM 3.5-2412SM		12 VDC	292 mA	82 %
TIM 3.5-2413SM		15 VDC	234 mA	83 %
TIM 3.5-2415SM		24 VDC	146 mA	82 %
TIM 3.5-2422SM		±12 VDC	±146 mA	82 %
TIM 3.5-2423SM		±15 VDC	±117 mA	83 %
TIM 3.5-4811SM	36 – 75 VDC (48 VDC nominal)	5.0 VDC	700 mA	79 %
TIM 3.5-4819SM		9.0 VDC	389 mA	80 %
TIM 3.5-4812SM		12 VDC	292 mA	81 %
TIM 3.5-4813SM		15 VDC	234 mA	82 %
TIM 3.5-4815SM		24 VDC	146 mA	81 %
TIM 3.5-4822SM		±12 VDC	±146 mA	81 %
TIM 3.5-4823SM		±15 VDC	±117 mA	82 %

Input Specifications

Input current no load	9 Vin models: 90 mA typ. 12 Vin models: 50 mA typ. 24 Vin models: 30 mA typ. 48 Vin models: 13 mA typ.
Surge voltage (1 s max.)	9 Vin models: 15 V max. 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.
Start-up voltage	9 Vin models: 4.5 VDC (or lower) 12 Vin models: 9.0 VDC (or lower) 24 Vin models: 18 VDC (or lower) 48 Vin models: 36 VDC (or lower)
Startup time	10 ms typ. / 20 ms max.
Under voltage shut down	9 Vin models: 2 - 4 VDC 12 Vin models: 6 - 8 VDC 24 Vin models: 13 - 17 VDC 48 Vin models: 29 - 35 VDC
Input filter	capacitor type
Conducted noise	– Conducted & Radiated input suppression – Application note for filter class A/B proposal EN 55011 limits to IEC/EN 60601-1-2 4th edit. EN 55032 class A or B with external components www.tracopower.com/overview/tim3sm
EMC immunity	– Generic for Medical equipment – ESD (electrostatic discharge) – Radiated immunity – Fast transient / surge (with external input capacitor / diode) – Conducted immunity – Magnetic field immunity IEC/EN 60601-1-2 4th edition EN 61000-4-2, air ± 15 kV, contact ± 8 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV perf. criteria A 9 Vin models: Nippon chemi-con KY 1000 μ F / 25 V TVS - SMAJ18A, 18 V, 400 W 12 & 24 Vin models: Nippon chemi-con KY 470 μ F / 50 V 48 Vin models: Nippon chemi-con KY 220 μ F / 100 V EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A
External input fuse required	9 Vin models: 1.6 A (slow blow) 12 Vin models: 0.8 A (slow blow) 24 Vin models: 0.5 A (slow blow) 48 Vin models: 0.315 A (slow blow)

Output Specifications

Voltage set accuracy	± 1 % max.
Regulation	– Input variation (Vin min. to Vin max.) 0.2% max. – Load variation (0 – 100 %) 1% max. – Load variation (10 – 90 %) single output: 0.5% max. dual output: 0.8% max. – Cross regulation dual output: 5.0% max. (asymmetrical load 25 / 100%)
Minimum load	not required
Ripple and noise (20 MHz Bandwidth)	5 - 15 Vout models: 50 mVp-p typ. 24, ± 12 & ± 15 Vout models: 75 mVp-p typ.
Transient response (25% load step change)	– Recovery time 500 μ s typ.
Short circuit protection	Continuous, automatic recovery

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Overvoltage protection		5.0 VDC models: 6 - 8 VDC 9.0 VDC models: 10 - 14 VDC 12 VDC models: 13 - 19 VDC 15 VDC models: 16 - 22 VDC 24 VDC models: 25 - 35 VDC
Capacitive load	– Single output	5.0 VDC models: 1'470 µF max. 9.0 VDC models: 680 µF max. 12 VDC models: 470 µF max. 15 VDC models: 330 µF max. 24 VDC models: 170 µF max.
	– Dual output	±12 VDC models: 220 µF max. (each output) ±15 VDC models: 160 µF max. (each output)
Temperature ranges	– Operating (natural convection: 20 LFM, 0.1 m/s) – Case temperature – Storage temperature	–40°C to +90°C +105°C max. –55°C to +125°C
Derating		3.3 %/K above 75°C
Humidity (non condensing)		5 % to 95 % rel H max.
Moisture sensitivity level (MSL)		IPC J-STD-033C Level 2a
Isolation voltage (50 Hz, 60 s)		5000 VAC (reinforced insulation)
Working voltage		250 VAC, 2 × MOPP
Isolation capacitance		20 pF max.
Clearance/creepage		8 mm min.
Leakage current (at 240 VAC, 60 Hz)		2 µA max.
Altitude during operation		5000 m max.
Temperature coefficient		±0.02 %/K max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		5'041'000 h
Switching frequency		100 kHz min. (frequency modulated)
Shock, vibration and thermal shock resistance		according to MIL-STD-810F
Remote On/Off	– On: – Off: – Off idle current:	open circuit or high impedance 2 – 4 mA current applied via 1kOhm resistor 2.5 mA typ.
Safety standards/approvals	– Medical equipment – Certification documents	ANSI/AAMI ES60601-1:2005/(R)2012, IEC/EN60601-1 3rd edition www.tracopower.com/overview/tim3sm
Environmental compliance	– Reach – RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU

Physical Specifications

Casing material	non-conductive black plastic
Base material	non-conductive black plastic
Potting material	silicone (UL94 V-0)
Package weight	7.0 g (0.24 oz)
Lead-free reflow solder process	IPC J-STD-020E

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

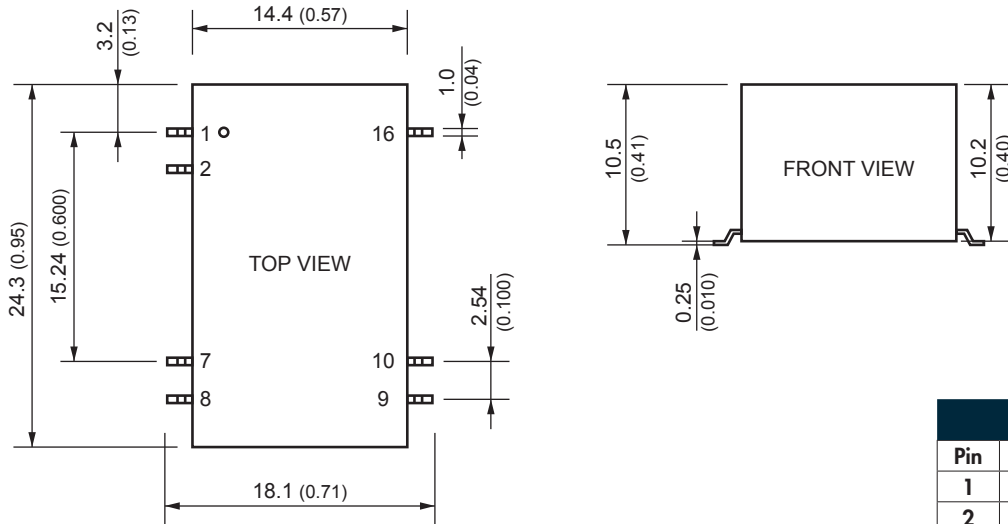

Dimensions in mm (inch)
 Tolerances ± 0.5 (± 0.02)
 Pin dimension 0.5 ± 0.1 (0.02 ± 0.004)
 Pin pitch tolerances ± 0.25 (± 0.01)

Standard Pinout		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	On/Off	On/Off
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin (Vcc)	+Vin (Vcc)