Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

BOURNS®

- **Rugged Triple-Diffused Planar Construction**
- **4 A Continuous Collector Current**
- **Operating Characteristics Fully Guaranteed at 100°C**
- **1000 Volt Blocking Capability**
- **75 W at 25°C Case Temperature**

TO-220 PACKAGE
(TOP VIEW)

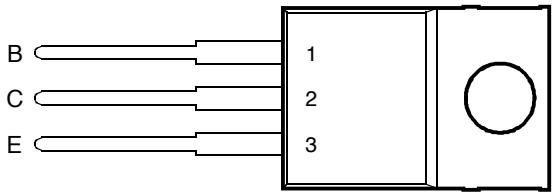

Pin 2 is in electrical contact with the mounting base.

MDTRACA

This series is obsolete and not recommended for new designs.

absolute maximum ratings at 25°C case temperature (unless otherwise noted)

RATING		SYMBOL	VALUE	UNIT
Collector-base voltage (I_E = 0)	TIPL760 TIPL760A	V_{CBO}	850 1000	V
Collector-emitter voltage (V_{BE} = 0)	TIPL760 TIPL760A	V_{CES}	850 1000	V
Collector-emitter voltage (I_B = 0)	TIPL760 TIPL760A	V_{CEO}	400 450	V
Emitter-base voltage		V_{EBO}	10	V
Continuous collector current		I_C	4	A
Peak collector current (see Note 1)		I_{CM}	8	A
Continuous device dissipation at (or below) 25°C case temperature		P_{tot}	75	W
Operating junction temperature range		T_j	-65 to +150	°C
Storage temperature range		T_{stg}	-65 to +150	°C

NOTE 1: This value applies for $t_p \leq 10$ ms, duty cycle ≤ 2%.

OBSOLETE

electrical characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER		TEST CONDITIONS				MIN	TYP	MAX	UNIT
$V_{CEO(sus)}$	Collector-emitter sustaining voltage	I_C = 10 mA	L = 25 mH	(see Note 2)	TIPL760	400			V
					TIPL760A	450			
I_{CES}	Collector-emitter cut-off current	V_{CE} = 850 V	V_{BE} = 0		TIPL760			50	μA
		V_{CE} = 1000 V	V_{BE} = 0		TIPL760A			50	
		V_{CE} = 850 V	V_{BE} = 0	T_C = 100°C	TIPL760			200	
		V_{CE} = 1000 V	V_{BE} = 0	T_C = 100°C	TIPL760A			200	
I_{CEO}	Collector cut-off current	V_{CE} = 400 V	I_B = 0		TIPL760			50	μA
		V_{CE} = 450 V	I_B = 0		TIPL760A			50	
I_{EBO}	Emitter cut-off current	V_{EB} = 10 V	I_C = 0					1	mA
h_{FE}	Forward current transfer ratio	V_{CE} = 5 V	I_C = 0.5 A	(see Notes 3 and 4)		20		60	
$V_{CE(sat)}$	Collector-emitter saturation voltage	I_B = 0.5 A	I_C = 2.5 A					1.0	V
		I_B = 0.8 A	I_C = 4 A	(see Notes 3 and 4)				2.5	
		I_B = 0.8 A	I_C = 4 A	T_C = 100°C				5.0	
$V_{BE(sat)}$	Base-emitter saturation voltage	I_B = 0.5 A	I_C = 2.5 A					1.2	V
		I_B = 0.8 A	I_C = 4 A	(see Notes 3 and 4)				1.4	
		I_B = 0.8 A	I_C = 4 A	T_C = 100°C				1.3	
f_t	Current gain bandwidth product	V_{CE} = 10 V	I_C = 0.5 A	f = 1 MHz			12		MHz
C_{ob}	Output capacitance	V_{CB} = 20 V	I_E = 0	f = 0.1 MHz			110		pF

NOTES: 2. Inductive loop switching measurement.
3. These parameters must be measured using pulse techniques, t_p = 300 μs, duty cycle ≤ 2%.
4. These parameters must be measured using voltage-sensing contacts, separate from the current carrying contacts.

OBSOLETE

thermal characteristics

PARAMETER		MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to case thermal resistance			1.56	°C/W

inductive-load-switching characteristics at 25°C case temperature (unless otherwise noted)

PARAMETER		TEST CONDITIONS †			MIN	TYP	MAX	UNIT
t_{sv}	Voltage storage time	I_C = 4 A, $V_{BE(off)}$ = -5 V	$I_{B(on)}$ = 0.8 A	(see Figures 1 and 2)			2.5	μs
t_{rv}	Voltage rise time						300	ns
t_{fi}	Current fall time						250	ns
t_{ti}	Current tail time						150	ns
t_{xo}	Cross over time						400	ns
t_{sv}	Voltage storage time	I_C = 4 A, $V_{BE(off)}$ = -5 V	$I_{B(on)}$ = 0.8 A, T_C = 100°C	(see Figures 1 and 2)			3	μs
t_{rv}	Voltage rise time						500	ns
t_{fi}	Current fall time						250	ns
t_{ti}	Current tail time						150	ns
t_{xo}	Cross over time						750	ns

† Voltage and current values shown are nominal; exact values vary slightly with transistor parameters.

BOURNS®

PARAMETER MEASUREMENT INFORMATION

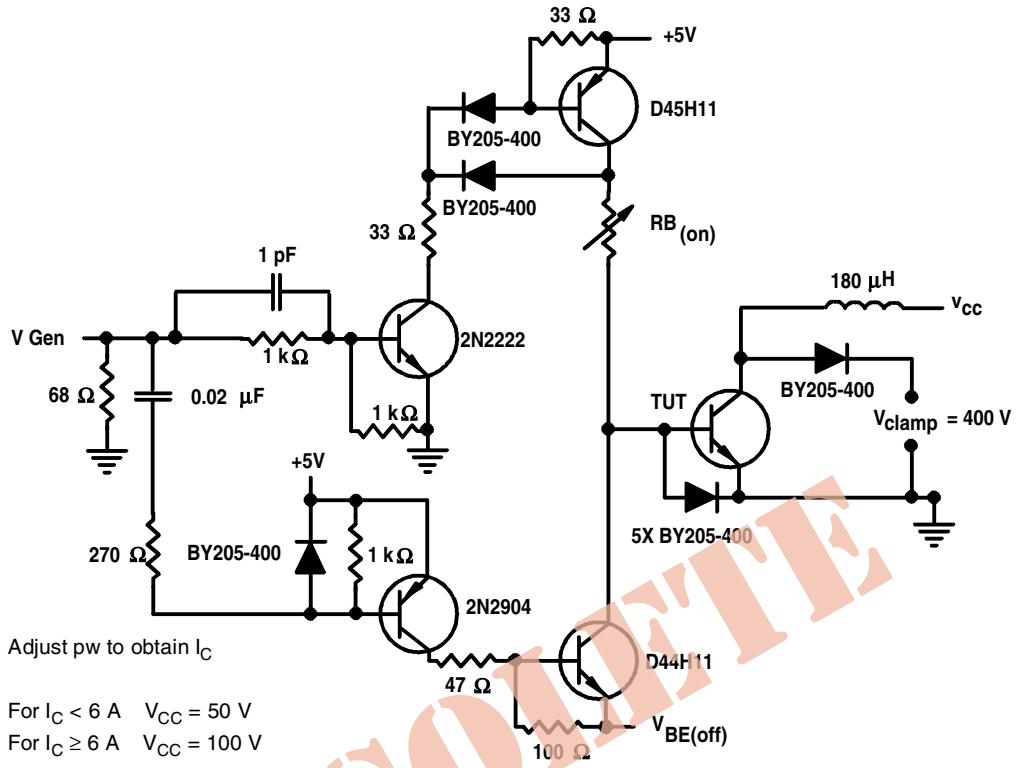

Figure 1. Inductive-Load Switching Test Circuit

OBSOLETE

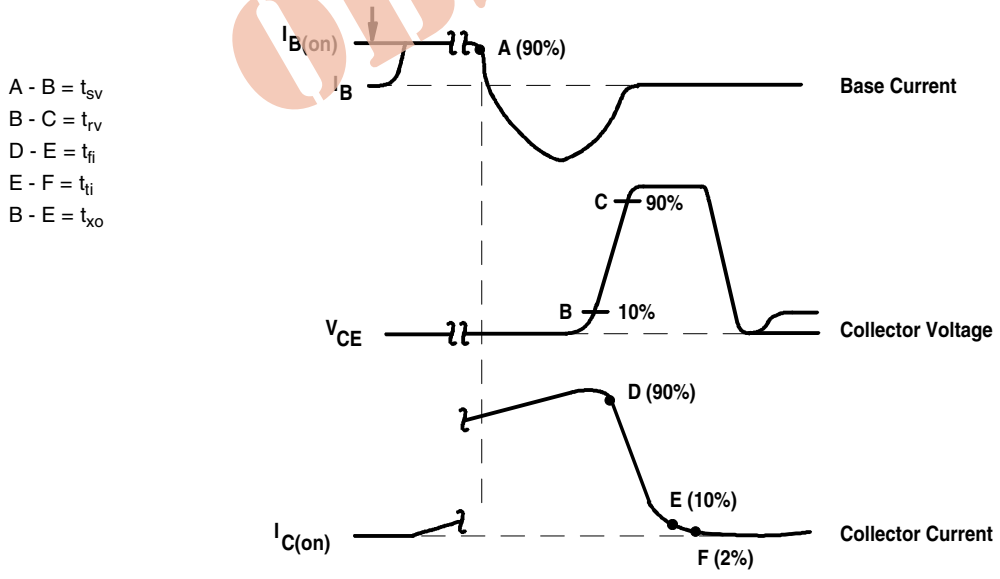

NOTES: A. Waveforms are monitored on an oscilloscope with the following characteristics: t_r < 15 ns, R_{in} > 10 Ω, C_{in} < 11.5 pF.
B. Resistors must be noninductive types.

Figure 2. Inductive-Load Switching Waveforms

TYPICAL CHARACTERISTICS

TYPICAL DC CURRENT GAIN vs COLLECTOR CURRENT

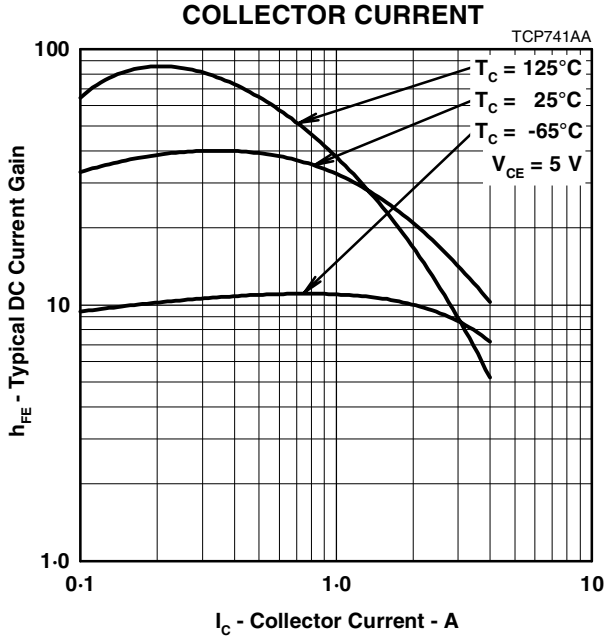

Figure 3.

COLLECTOR-EMITTER SATURATION VOLTAGE vs BASE CURRENT

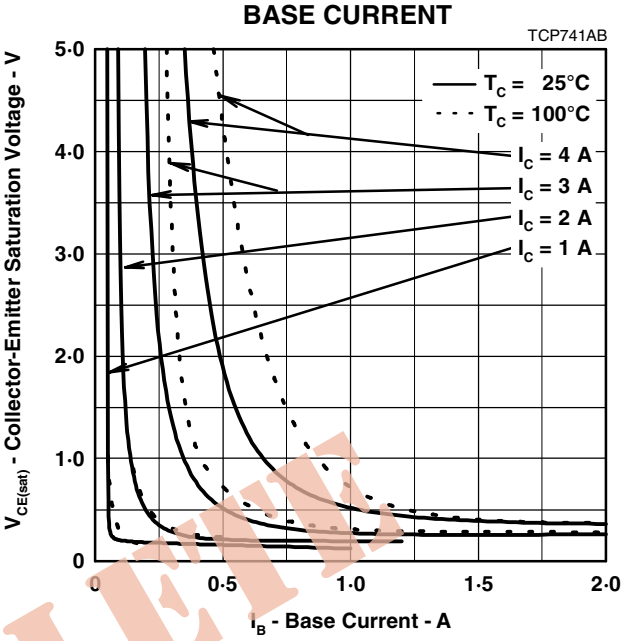

Figure 4.

OBSOLETE

BASE-EMITTER SATURATION VOLTAGE vs BASE CURRENT

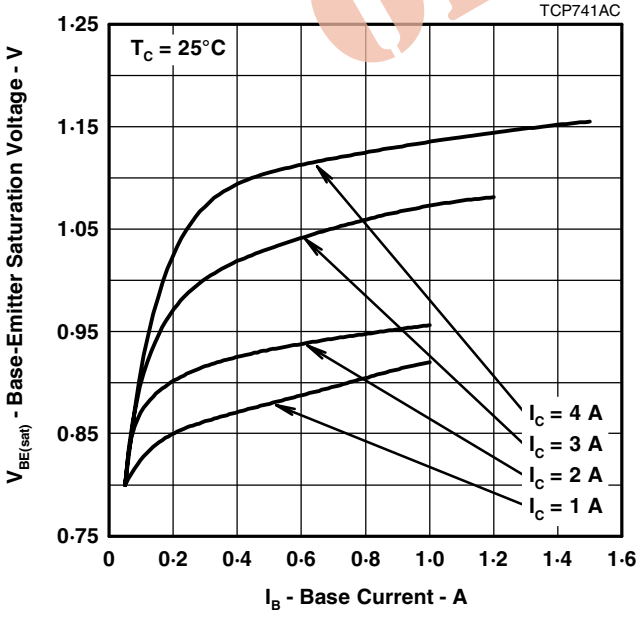

Figure 5.

COLLECTOR CUT-OFF CURRENT vs CASE TEMPERATURE

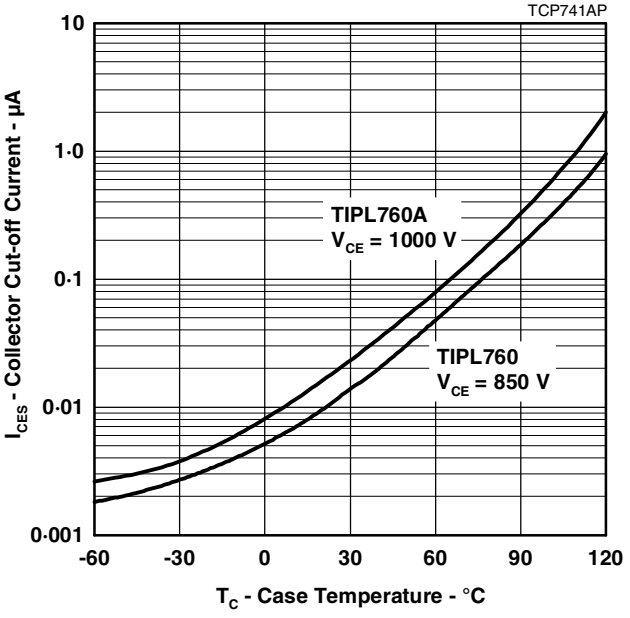

Figure 6.

BOURNS®

MAXIMUM SAFE OPERATING REGIONS

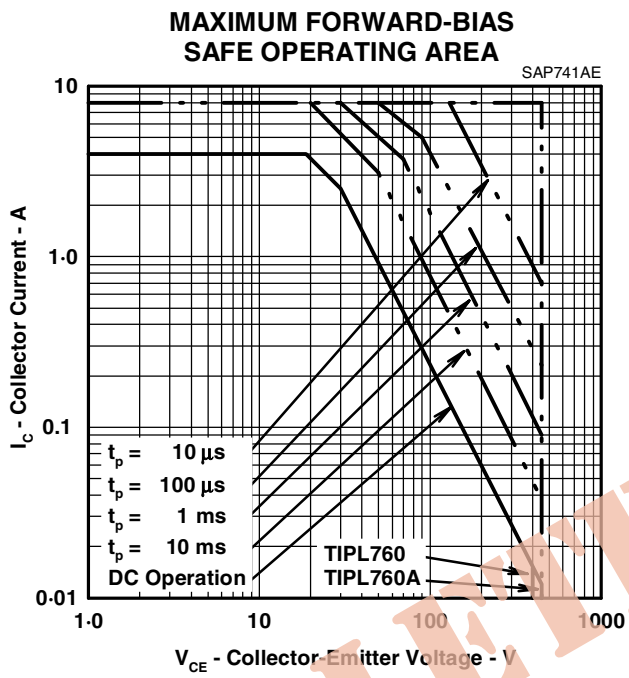

Figure 7.

THERMAL INFORMATION

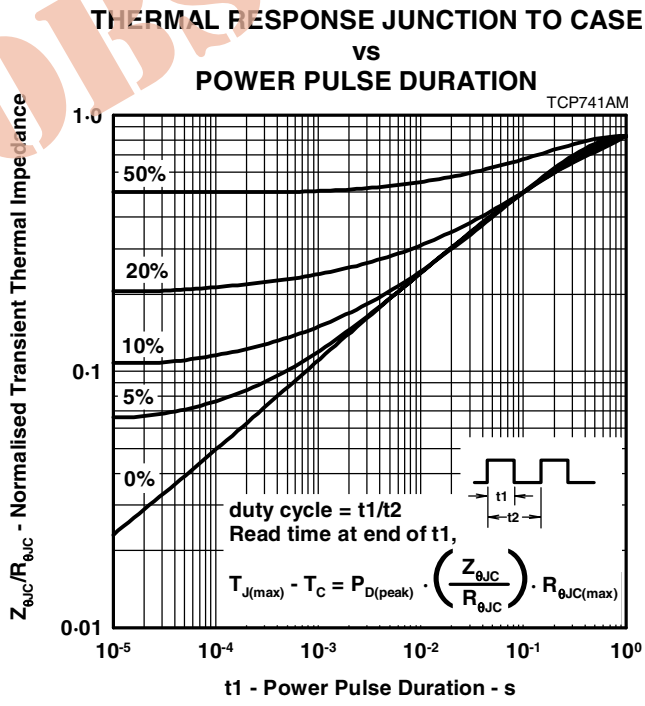

Figure 8.

OBSOLETE