

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








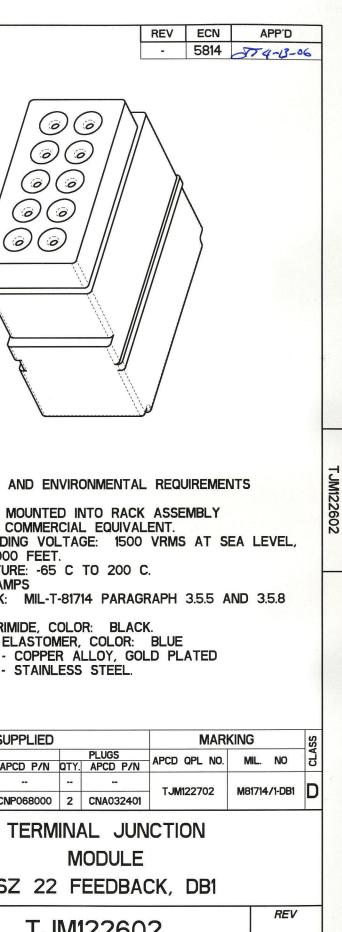

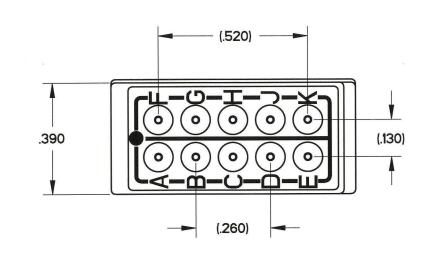

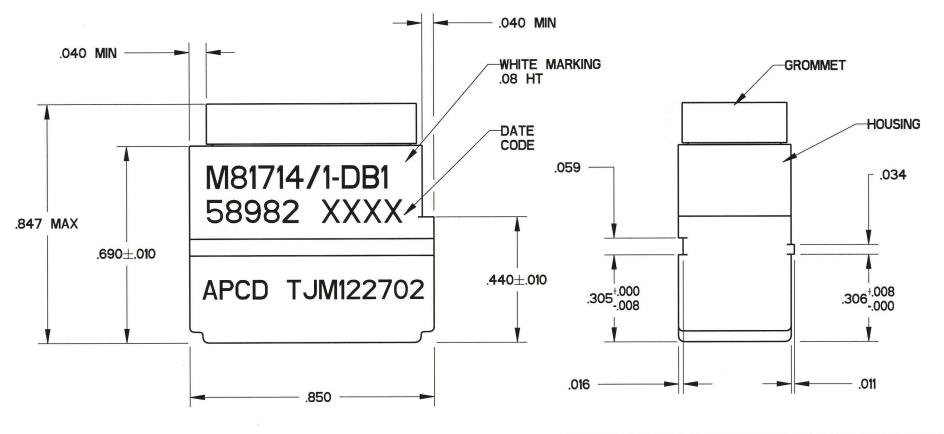

**DIMENSIONS** 

ANSI Y14.5M

Pro/E FILE

UNITS: INCHES

ORIGINAL

OF AMPHENOL PCD INC., PEABODY, MA

NOTES: 1. PERFORMANCE:

A) MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/1

(ō)

6

(i)

6

- B) MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.
- C) DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
- D) OPERATING TEMPERATURE: -65 C TO 200 C.
- E) CURENT RATING: 5 AMPS

TITLE

- F) VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8
- 2. MATERIALS:
  - A) HOUSING POLYETHERIMIDE, COLOR: BLACK.
  - B) GROMMET SILICONE ELASTOMER, COLOR: BLUE
  - C) INTERNAL CONTACTS COPPER ALLOY, GOLD PLATED
  - D) CONTACT RETAINERS STAINLESS STEEL.

				SUPPLIED	LIED		MARKING		SS
1	APCD P/N		PINS	X		PLUGS	ADCD ODI NO MI	MIL. NO	75
L		QTY.	MIL. P/N	APCD P/N	QTY.	APCD P/N	APCD QPL NO.	MIL. MO	ರ
	TJM122602		-				TJM122702 M81714/1-DB	M81714/1-DB1	
	TJM122702	11	M39029/1-100	CNP068000	2	CNA032401	13101122702	WIGI7 1-77 1-001	ט

Δ.	PROJECTION	TOLERANCES
DRWN A. S		.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°
ENGR R. S APPD	INT CONTAINS FORMATION WHICH NTIAL PROPERTY	PROPRIETARY INF

mphenol Pcd SPECIFICATION DRAWING

SWEEZEY 03/09/06 SWAINE 03/01/06

4-13-06

MODULE SZ 22 FEEDBACK, DB1

DWG NO. SIZE TJM122602

SCALE: 3:1 CODE: 58982 SHEET 1 OF 1