



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES TL2205 SWITCHES



ILLUMINATED PUSHBUTTON SWITCH



MECHANICAL SPECIFICATIONS

Mechanical Life:	10,000 cycles
Force:	250 +/- 100 grams
Travel:	Full: 2.5 +/- 0.3mm; To Lock: 1.5 +/- 0.3mm

ELECTRICAL SPECIFICATIONS

Contact Arrangement:	DPDT
Contact Rating:	30VDC, 100mA
Contact Resistance:	50mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 500VDC)
Dielectric Strength:	500VAC

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-20°C to +70°C
Storage Temperature:	-20°C to +70°C

FEATURES & BENEFITS

Momentary or latching designs
Long travel
Illumination options


APPLICATIONS / MARKETS

Telecommunications
Networking
Low power on/off designs
Computers/servers
Performance audio


HOW TO ORDER:




TL2205



OA = Momentary
EE = Latching



B = 3.7 LED Spacing
C = 5.7 LED Spacing



P = Thru Hole



B = Blue
R = Red
G = Green
Y = Yellow
X = Without





A = Without Button
B = Black w/LED Window*

*Only available with "B" plunger

Parts are tray packaged.

Specifications subject to change without notice.

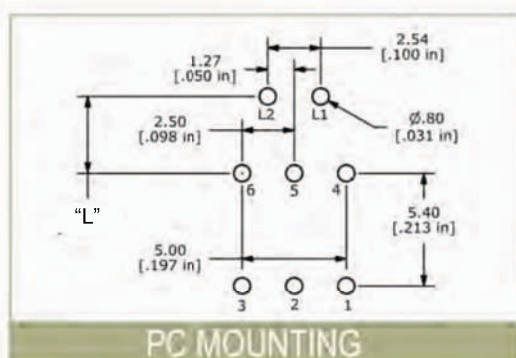


LED SPECIFICATIONS

	Units	Blue	Red	Green	Yellow
Forward Current	mA	20mA	20mA	20mA	20mA
Forward Voltage @ 20mA	VDC	3.5 typ - 3.8 max	1.7 typ - 2.6 max	1.7 typ - 2.6 max	1.7 typ - 2.6 max
Luminous Intensity @ 20mA	mcd	45 typ	4 typ	6 typ	5 typ

SERIES TL2205 SWITCHES



TL2205 Without Button:

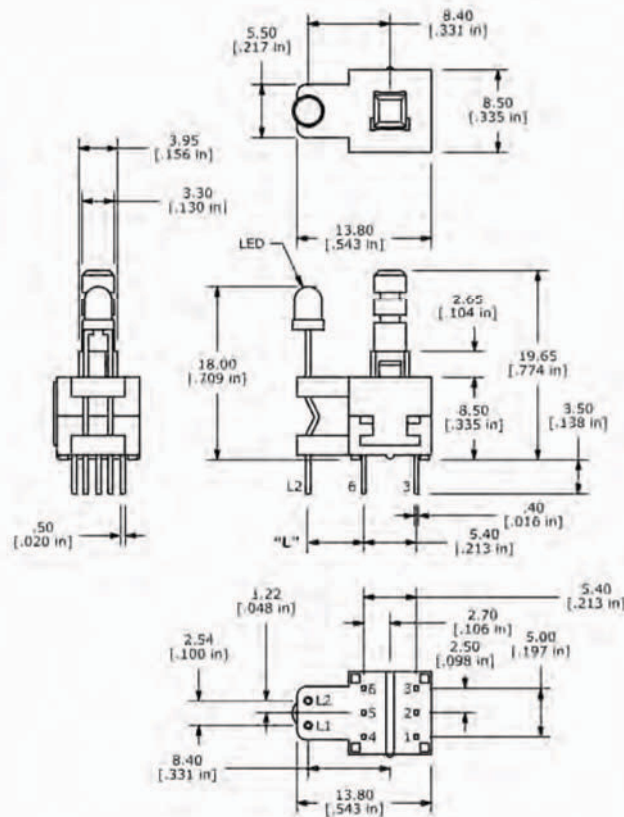

TL2205 With Button:

