



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Protect It! 6-Outlet Surge Protector, 4-ft. Cord, 540 Joules - Accommodates 2 Transformers

MODEL NUMBER: TLP64

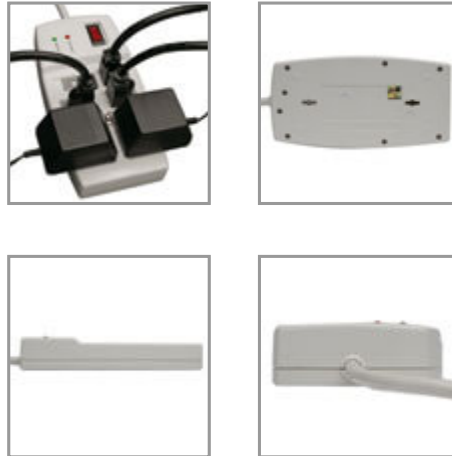

### Highlights

- 6 outlets / 4 ft cord
- 540 joule rating
- \$20,000 Ultimate Lifetime Insurance (U.S., Canada, and Puerto Rico only)

### Package Includes

- TLP64
- Instruction manual with warranty information

### Description

Tripp Lite's TLP64 offers economical AC surge suppression for protection of workstations, desktop PCs, point-of-sale terminals and other sensitive electronics. Built-in AC surge suppression shields connected equipment from damage and performance problems due to transient surges. TLP64 offers 6 total outlets, 4 foot cord and diagnostic LEDs to warn of suppressor damage. AC suppression rated at 540 joules shields equipment from surges and line noise. Attractive gray suppressor housing with keyhole mounting tabs offer convenient protection of desktop computer equipment and accessories. \$20,000 Ultimate Lifetime Insurance (U.S., Canada, and Puerto Rico only).

### Features

- 6 outlets with integrated child safety covers
- 4ft cord
- Surge suppression rating: 540 joules
- EMI/RFI noise filtering
- Can accommodate up to 2 transformers without blocking remaining outlets
- Diagnostic LEDs indicate protection present and ground present
- Keyhole supports for wall mounting
- Lighted power switch
- \$20,000 Ultimate Lifetime Insurance (U.S., Canada, and Puerto Rico only)
- Automatic shutoff cuts power to outlets when the protection circuit has been compromised

## Specifications

### OVERVIEW



UPC Code	037332159694
<b>OUTPUT</b>	
Frequency Compatibility	60 Hz
Output Receptacles	(6) 5-15R
Output (Watts)	1800
Circuit Breaker (amps)	15
Overload Protection	15A resettable illuminated combo switch / circuit breaker
Transformer Accommodation	Supports 2 large transformer plug accessory without covering remaining outlets, accepts up to 4 transformers total
Outlet Safety Covers	6
Outlet Orientation	Block style 2 rows of 3 outlets
Right-Angle Outlets	No
<b>INPUT</b>	
Nominal Input Voltage(s) Supported	120V AC
Recommended Electrical Service	120V (110-125V)
Input Connection Type	NEMA 5-15P
Input Cord Length (ft.)	4
Input Cord Length (m)	1.22
Input Cord Gauge Type	14 gauge, SJT
Voltage Compatibility (VAC)	120
Maximum Surge Amps	36000
Right-Angle Plug	No
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Switches	Combination AC circuit breaker and 2 position red illuminated on/off power switch
Diagnostic LED Details	Built-in LED confirms suppressor "protection present" (green) status
<b>SURGE / NOISE SUPPRESSION</b>	
AC Suppression Joule Rating	540
AC Suppression Response Time	< 1 ns
Protection Modes	Includes full normal mode (H-N) and common mode (N-G / H-G) line surge suppression
Clamping Voltage (RMS)	150
UL1449 Let Through Rating	400v
EMI / RFI Filtering	Up to 40 dB
<b>DATALINE SURGE SUPPRESSION</b>	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

Telephone/DSL Protection	No
Cable (Coax) Protection	No
Network (Ethernet) Protection	No
<b>PHYSICAL</b>	
Shipping Dimensions (hwd / in.)	11.70 x 1.75 x 7.20
Shipping Dimensions (hwd / cm)	29.72 x 4.44 x 18.29
Shipping Weight (lbs.)	1.40
Shipping Weight (kg)	0.64
Unit Dimensions (hwd / in.)	1.50 x 4.23 x 8.29
Unit Dimensions (hwd / cm)	3.81 x 10.74 x 21.06
Unit Weight (lbs.)	1.10
Unit Weight (kg)	0.50
Material of Construction	Plastic
Integrated Keyhole Mounting Tabs	Keyhole mounting tabs enable wall mounting
Housing Color	Light Gray
Receptacle Color	Light gray
Color (AC Line Cord)	Light Gray
Outlets Measurement (Center to Center)	Distance between standard outlets = 28.5mm; Distance between standard outlet and transformer outlet = 48.5mm
Keyhole Slot Mounting Measurement (Center to Center)	119mm
<b>CERTIFICATIONS</b>	
UL1449 3rd Edition (AC Suppression)	UL1449 3rd Edition
UL1363 (Power Tap)	UL1363
cUL / CSA (Canada)	cUL
Approvals	Exceeds IEEE 587 category A&B specifications
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	Lifetime limited warranty
Connected Equipment Insurance (U.S., Canada & Puerto Rico)	\$20,000&nbsp;&lt;a class="insuranceLink" href="//www.tripplite.com/support/insurance-policy">Ultimate Lifetime Insurance&lt;/a&nbsp;&lt;/td>

© 2018 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>